
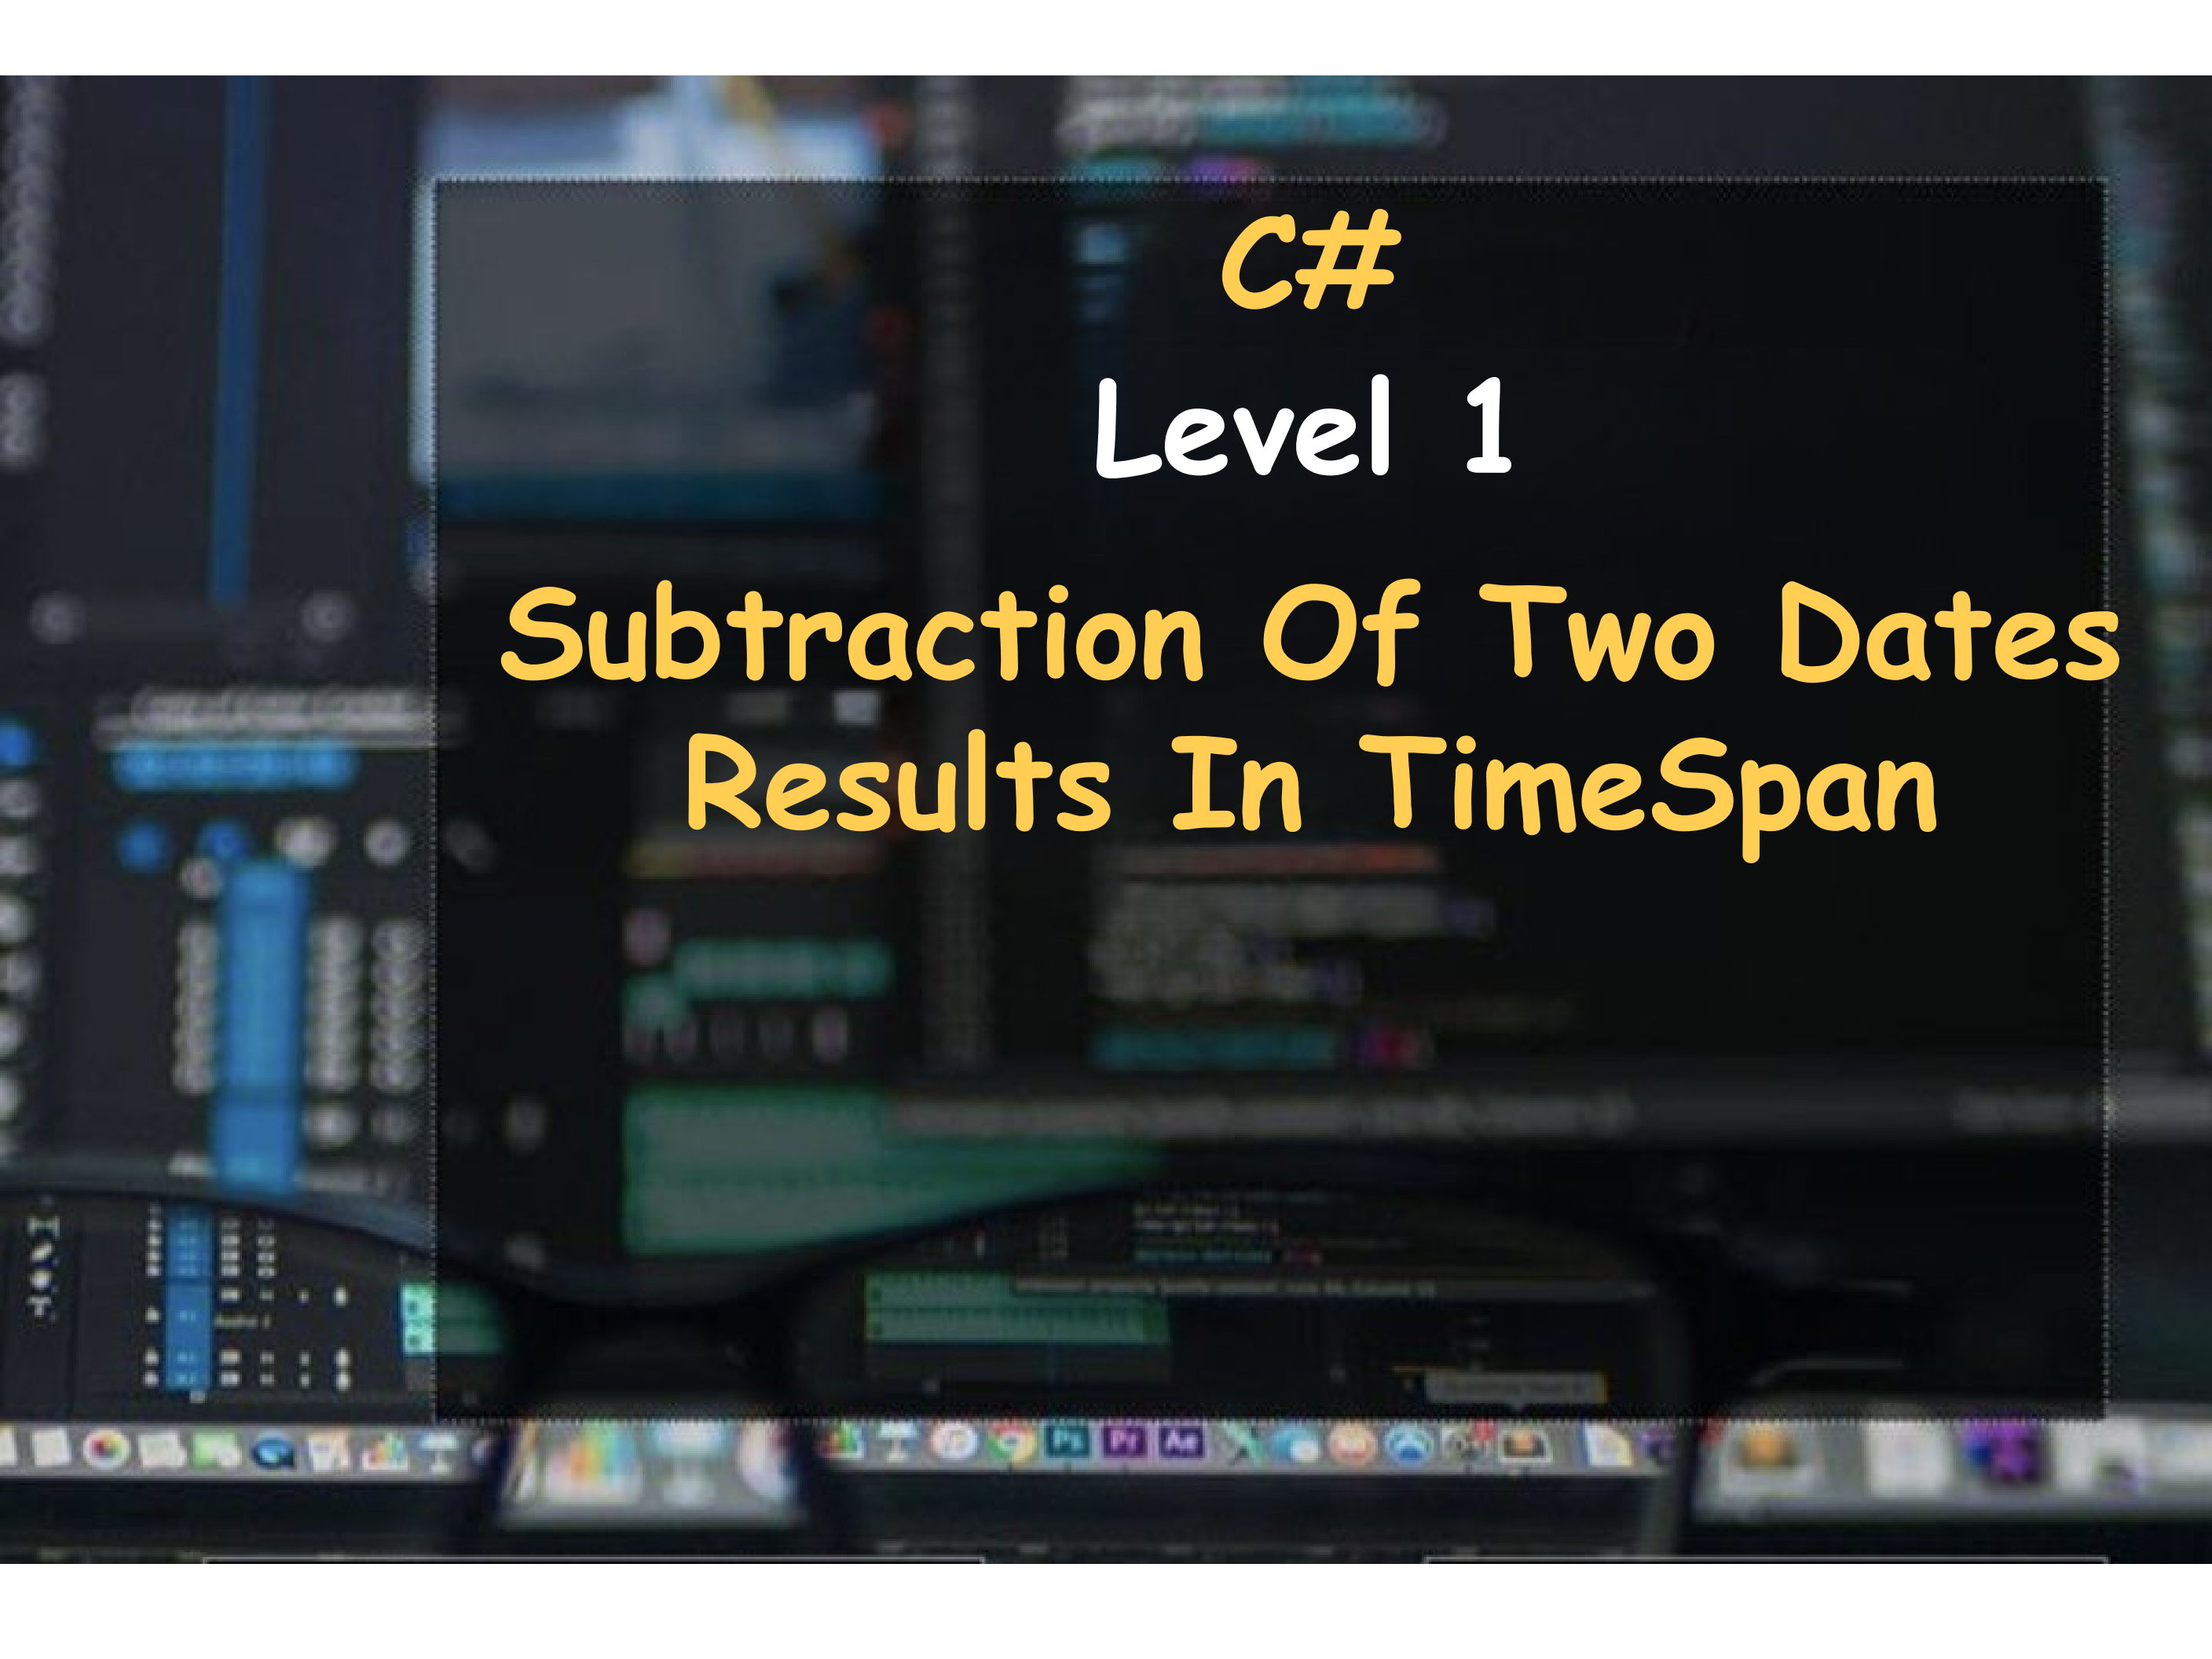


The background of the slide is a blurred screenshot of a computer monitor displaying a code editor. The code is written in C# and uses a dark theme with syntax highlighting. The text is overlaid on this background. 

# C#

## Level 1

# Subtraction Of Two Dates Results In TimeSpan

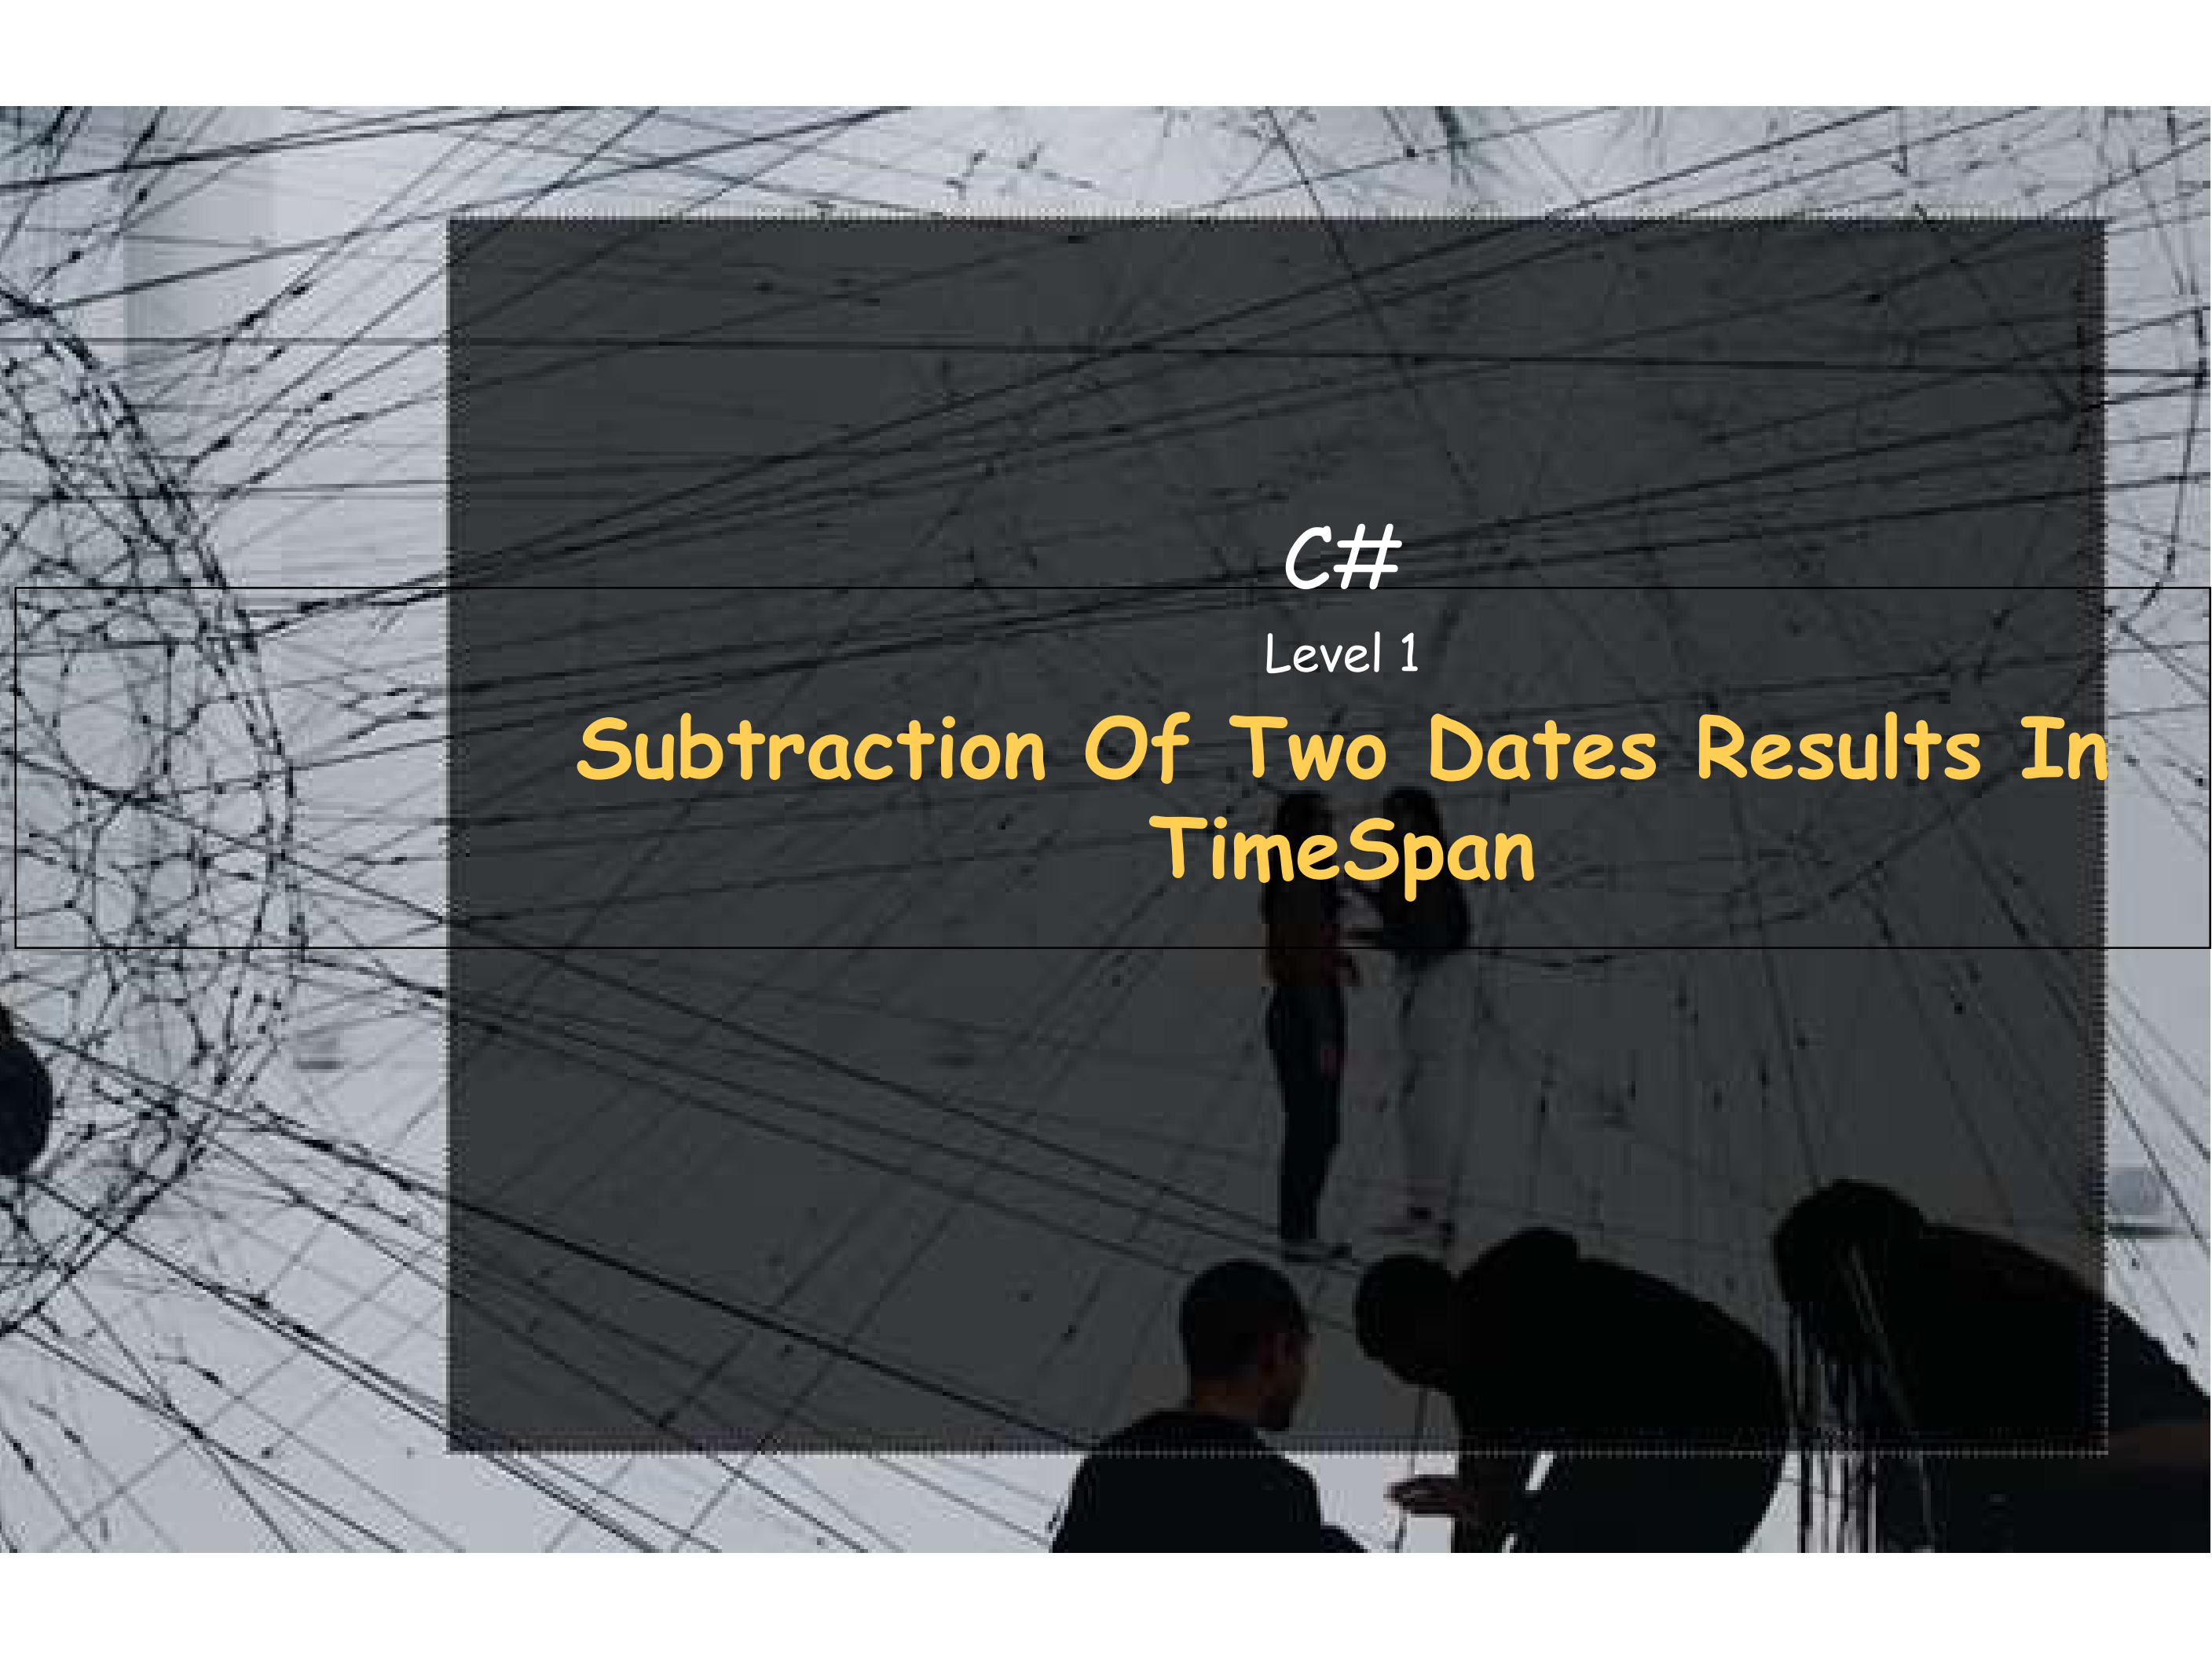

C#

Level 1

# Subtraction Of Two Dates Results In TimeSpan

# Definition

## Date Subtraction

 Subtracting two `DateTime` values returns a `TimeSpan` representing the difference between them.

## Explanation

### `Subtract()`

 `dt2.Subtract(dt1)` calculates the time difference between `dt2` and `dt1`.

 The result is stored in a `TimeSpan` variable.

### Getting the Difference

 `.Days` returns the number of complete days between the two dates.

# Procedures

1. Create the first `DateTime`.
2. Create the second `DateTime`.
3. Subtract the first date from the second using `.Subtract()`.
4. Store the result in a `TimeSpan`.
5. Access the difference using `.Days`.

## 💡 Example

```
DateTime dt1 = new DateTime(2023, 2, 21);  
DateTime dt2 = new DateTime(2023, 2, 25);  
TimeSpan result = dt2.Subtract(dt1);
```

➡ Result:

4

## Note

- ◆ ``DateTime - DateTime`` also produces a ``TimeSpan``.
- ◆ The order matters: ``dt2.Subtract(dt1)`` gives a positive result when ``dt2`` is later than ``dt1``.

## ✦✦ Summary

- ✓ Subtracting two dates produces a `TimeSpan``.
- ✓ `.Days`` can be used to get the difference in complete days.

Thank you 😊