




C# Level 1 Operators

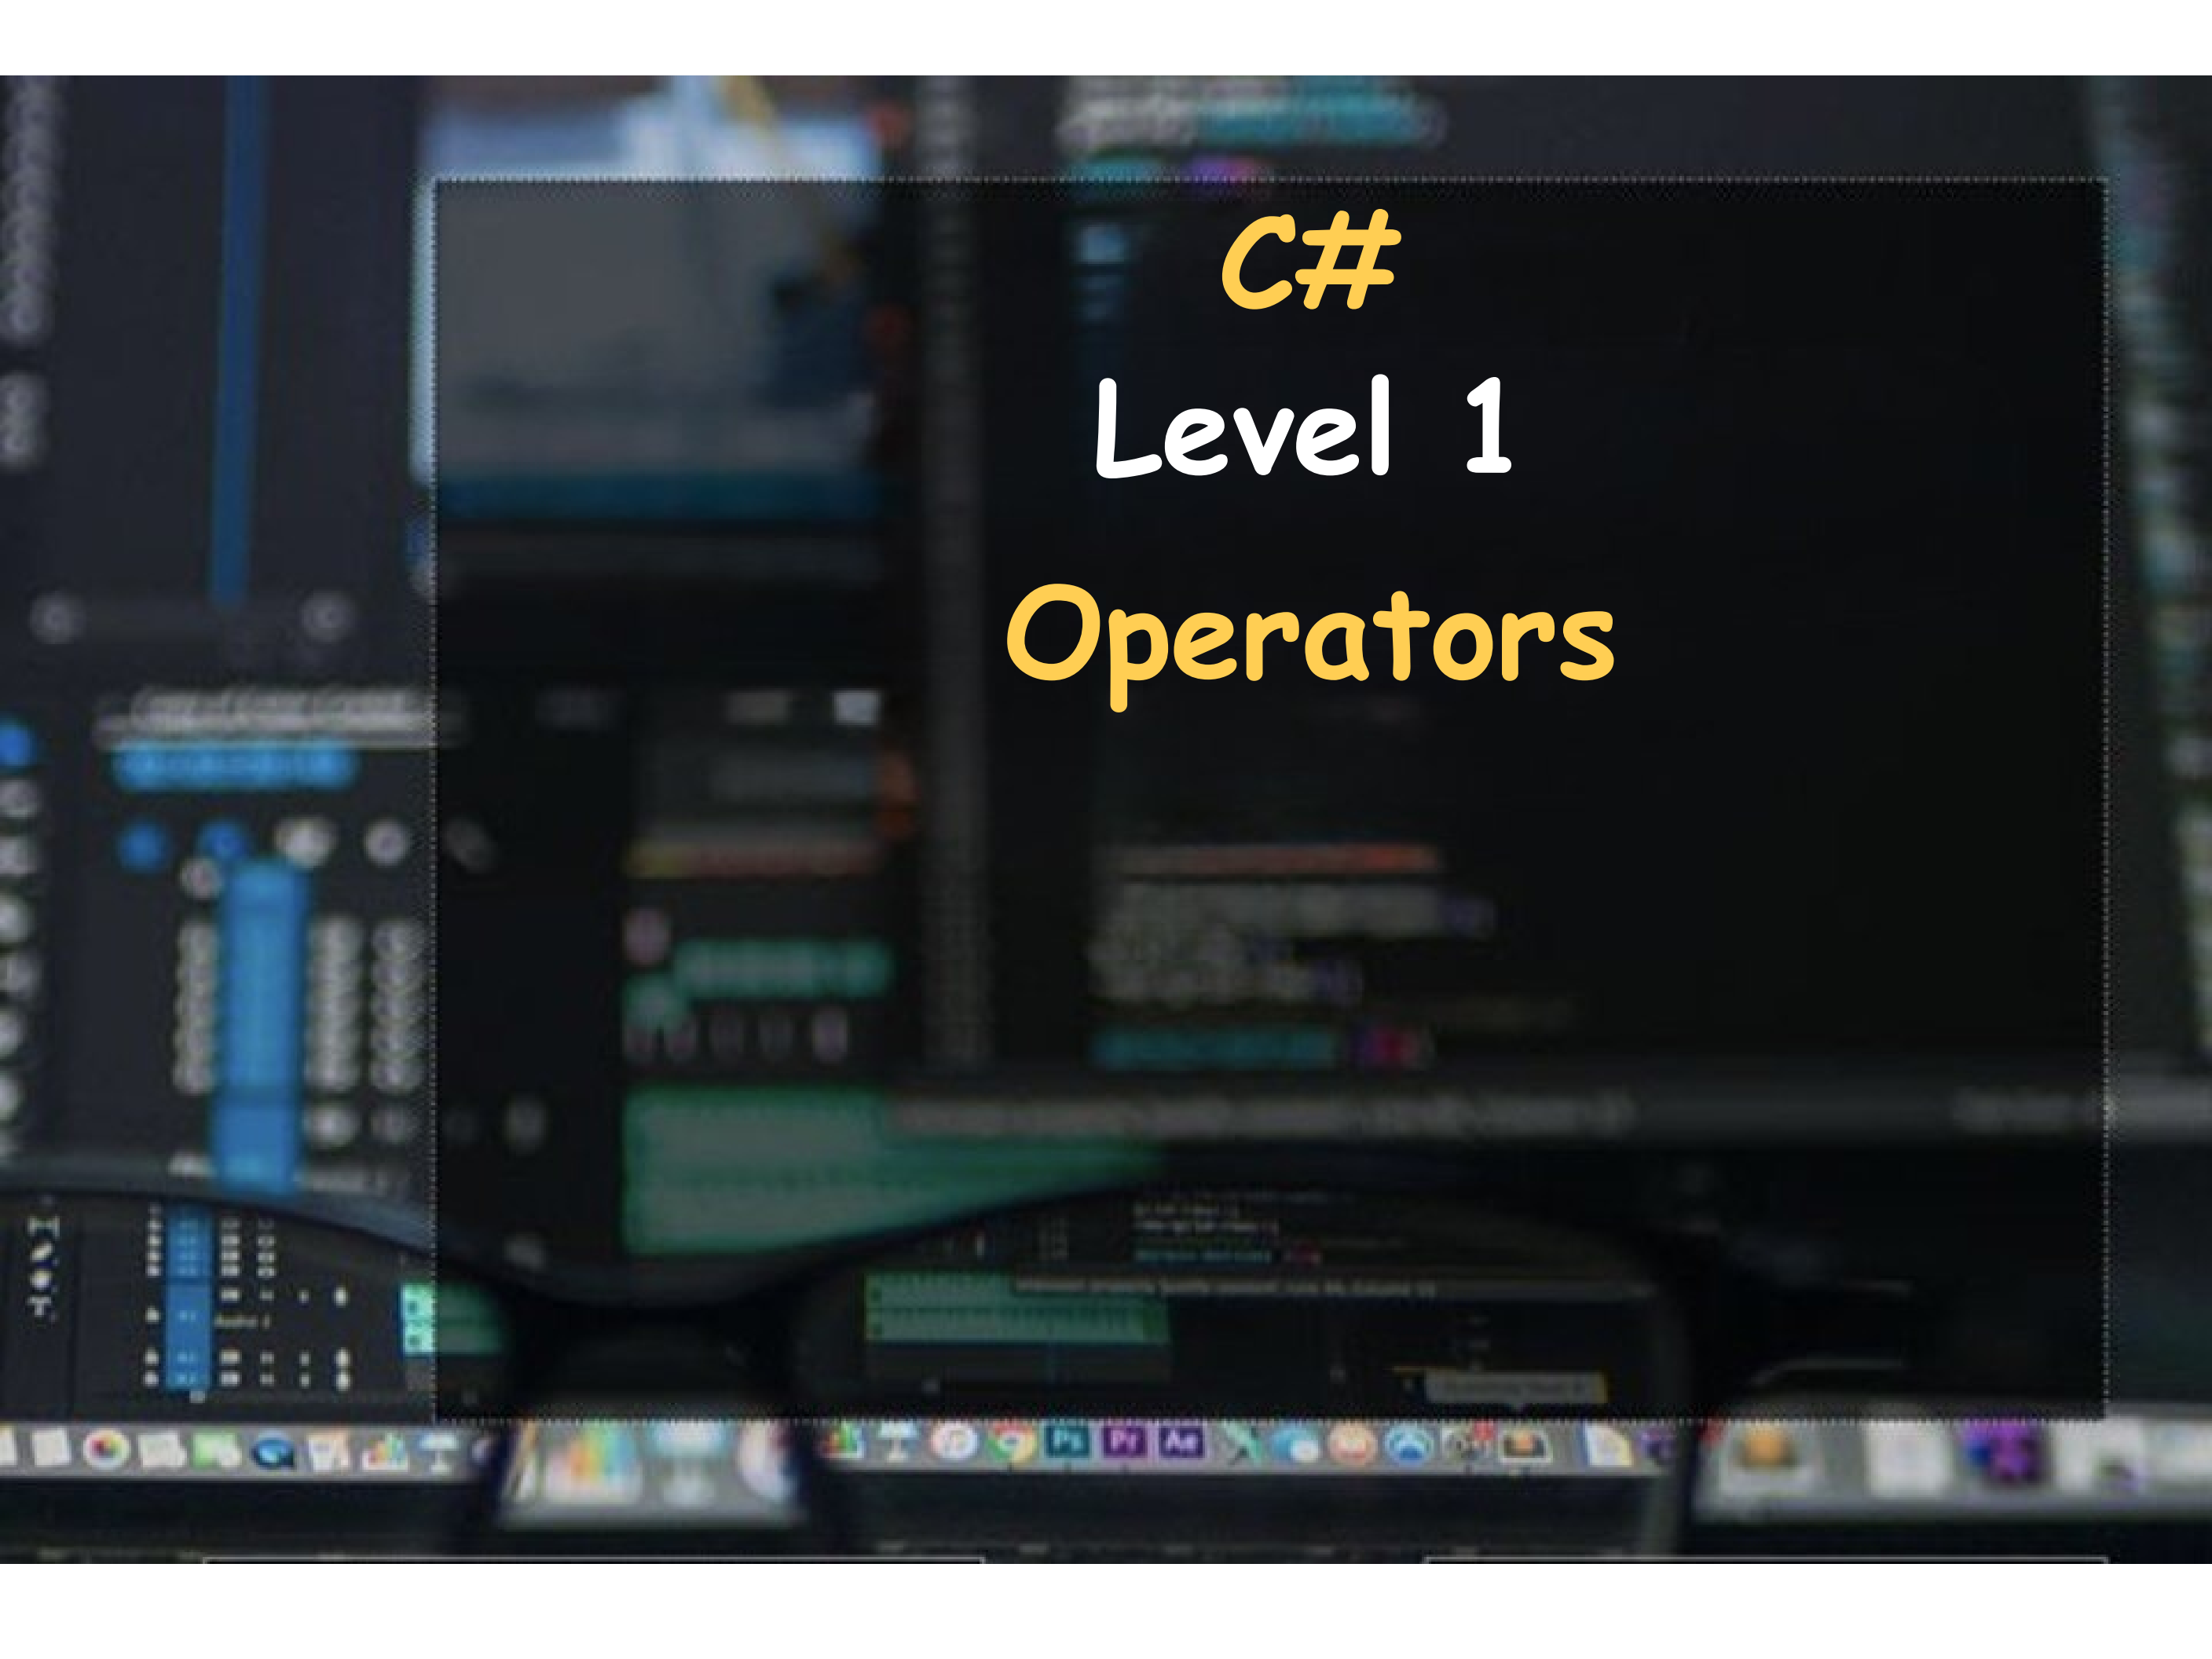

C#

Level 1

Operators

Definition

 DateTime and TimeSpan Operators

 Operators can be used to add or subtract `TimeSpan` values and compare `DateTime` values.

Explanation

Adding TimeSpan

 ``DateTime + TimeSpan`` adds a duration to a date and returns a new ``DateTime``.

Subtracting

 ``DateTime - DateTime`` returns a ``TimeSpan`` representing the difference between the two dates.

 This is the same concept covered in #42.

Comparing DateTime

 ``==`` checks if two dates are equal.

 ``!=`` checks if two dates are different.

 ``>`` checks if the first date is later.

 ``<`` checks if the first date is earlier.

 ``>=`` checks if the first date is later or equal.

 ``<=`` checks if the first date is earlier or equal.

Procedures

1. Create two `DateTime` objects.
2. Create a `TimeSpan`.
3. Use `+` to add the TimeSpan to a DateTime.
4. Use `-` to subtract two DateTime values.
5. Use comparison operators to compare the dates.

Note

- ◆ ``DateTime - DateTime`` returns a ``TimeSpan``, as covered in #42.
- ◆ ``DateTime + TimeSpan`` returns a new ``DateTime``; the original date is not changed.
- ◆ Comparison operators return a ``bool`` value: ``True`` or ``False``.

⊘ Warning

- ◆ The order of subtraction matters: ``dt2 - dt1`` and ``dt1 - dt2`` produce opposite ``TimeSpan`` results.
- ◆ ``>`` and ``<`` compare which date occurs later or earlier; they do not compare the displayed date format.

✦✦ Summary

- ✓ '+' adds a 'TimeSpan' to a 'DateTime'.
- ✓ '-' between two 'DateTime' values produces a 'TimeSpan'.
- ✓ '==', '!=', '>', '<', '>=', and '<=' compare 'DateTime' values.

Thank you 😊