



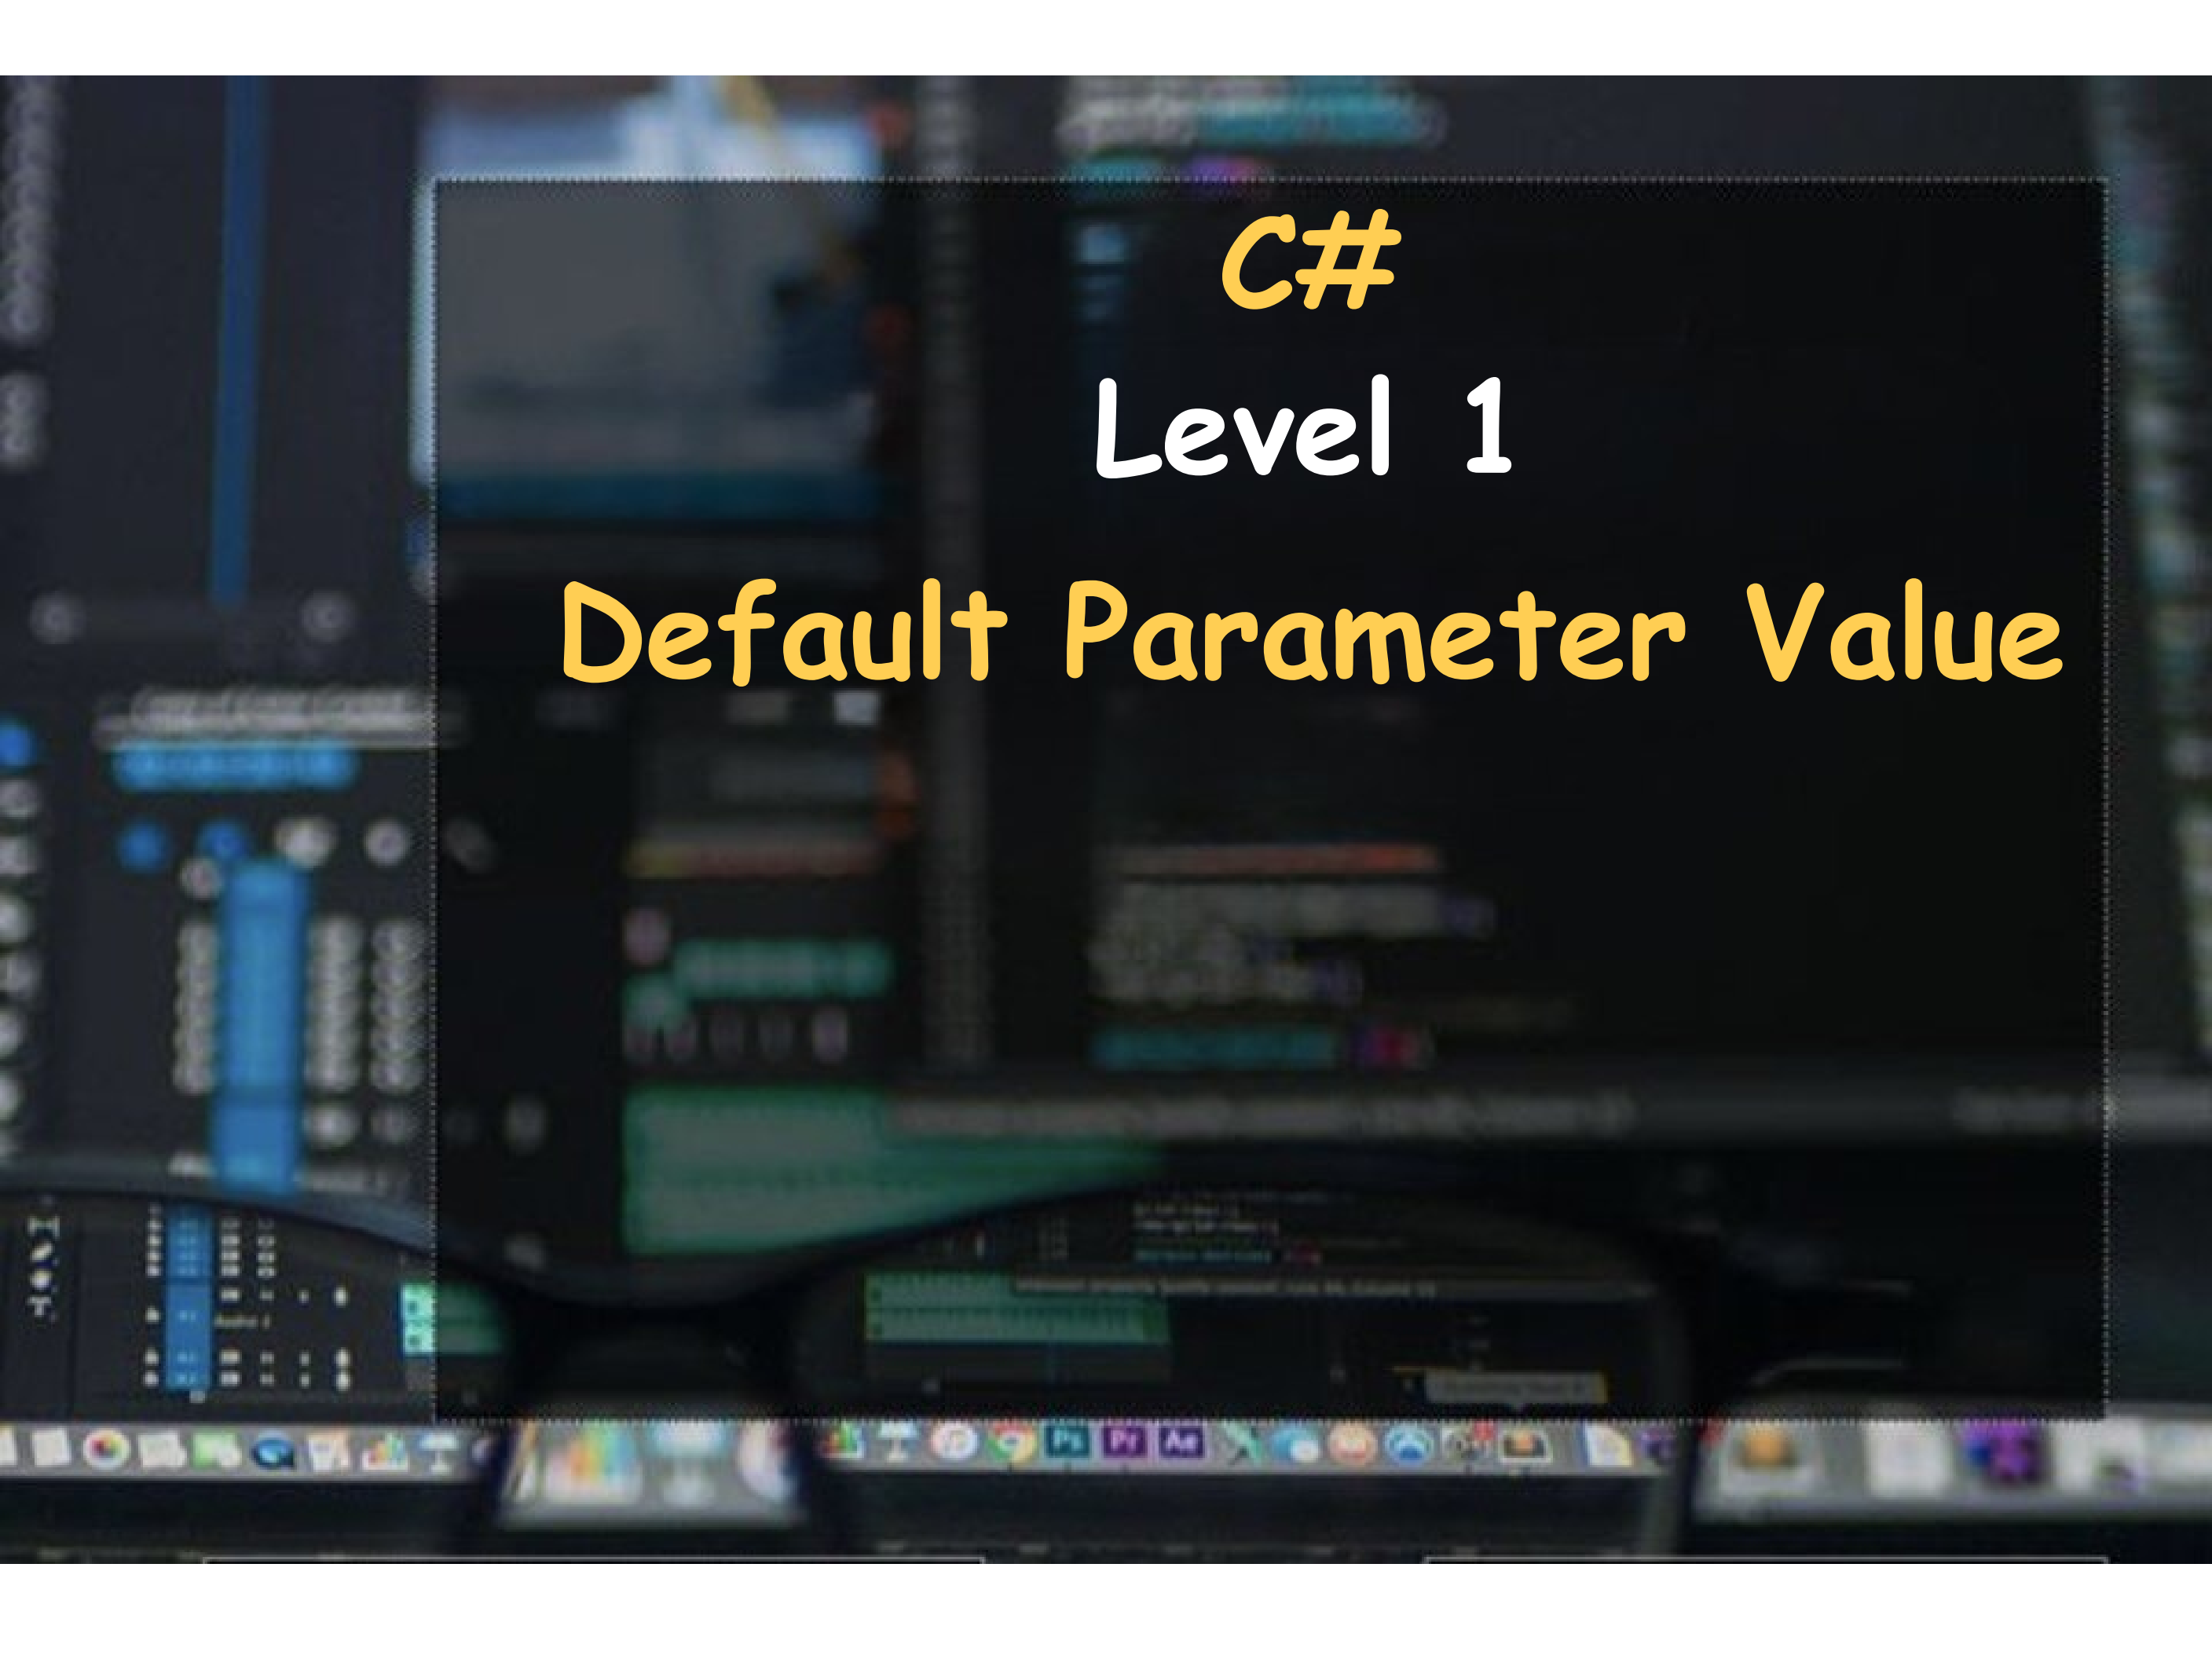

C#

Level 1

Default Parameter Value

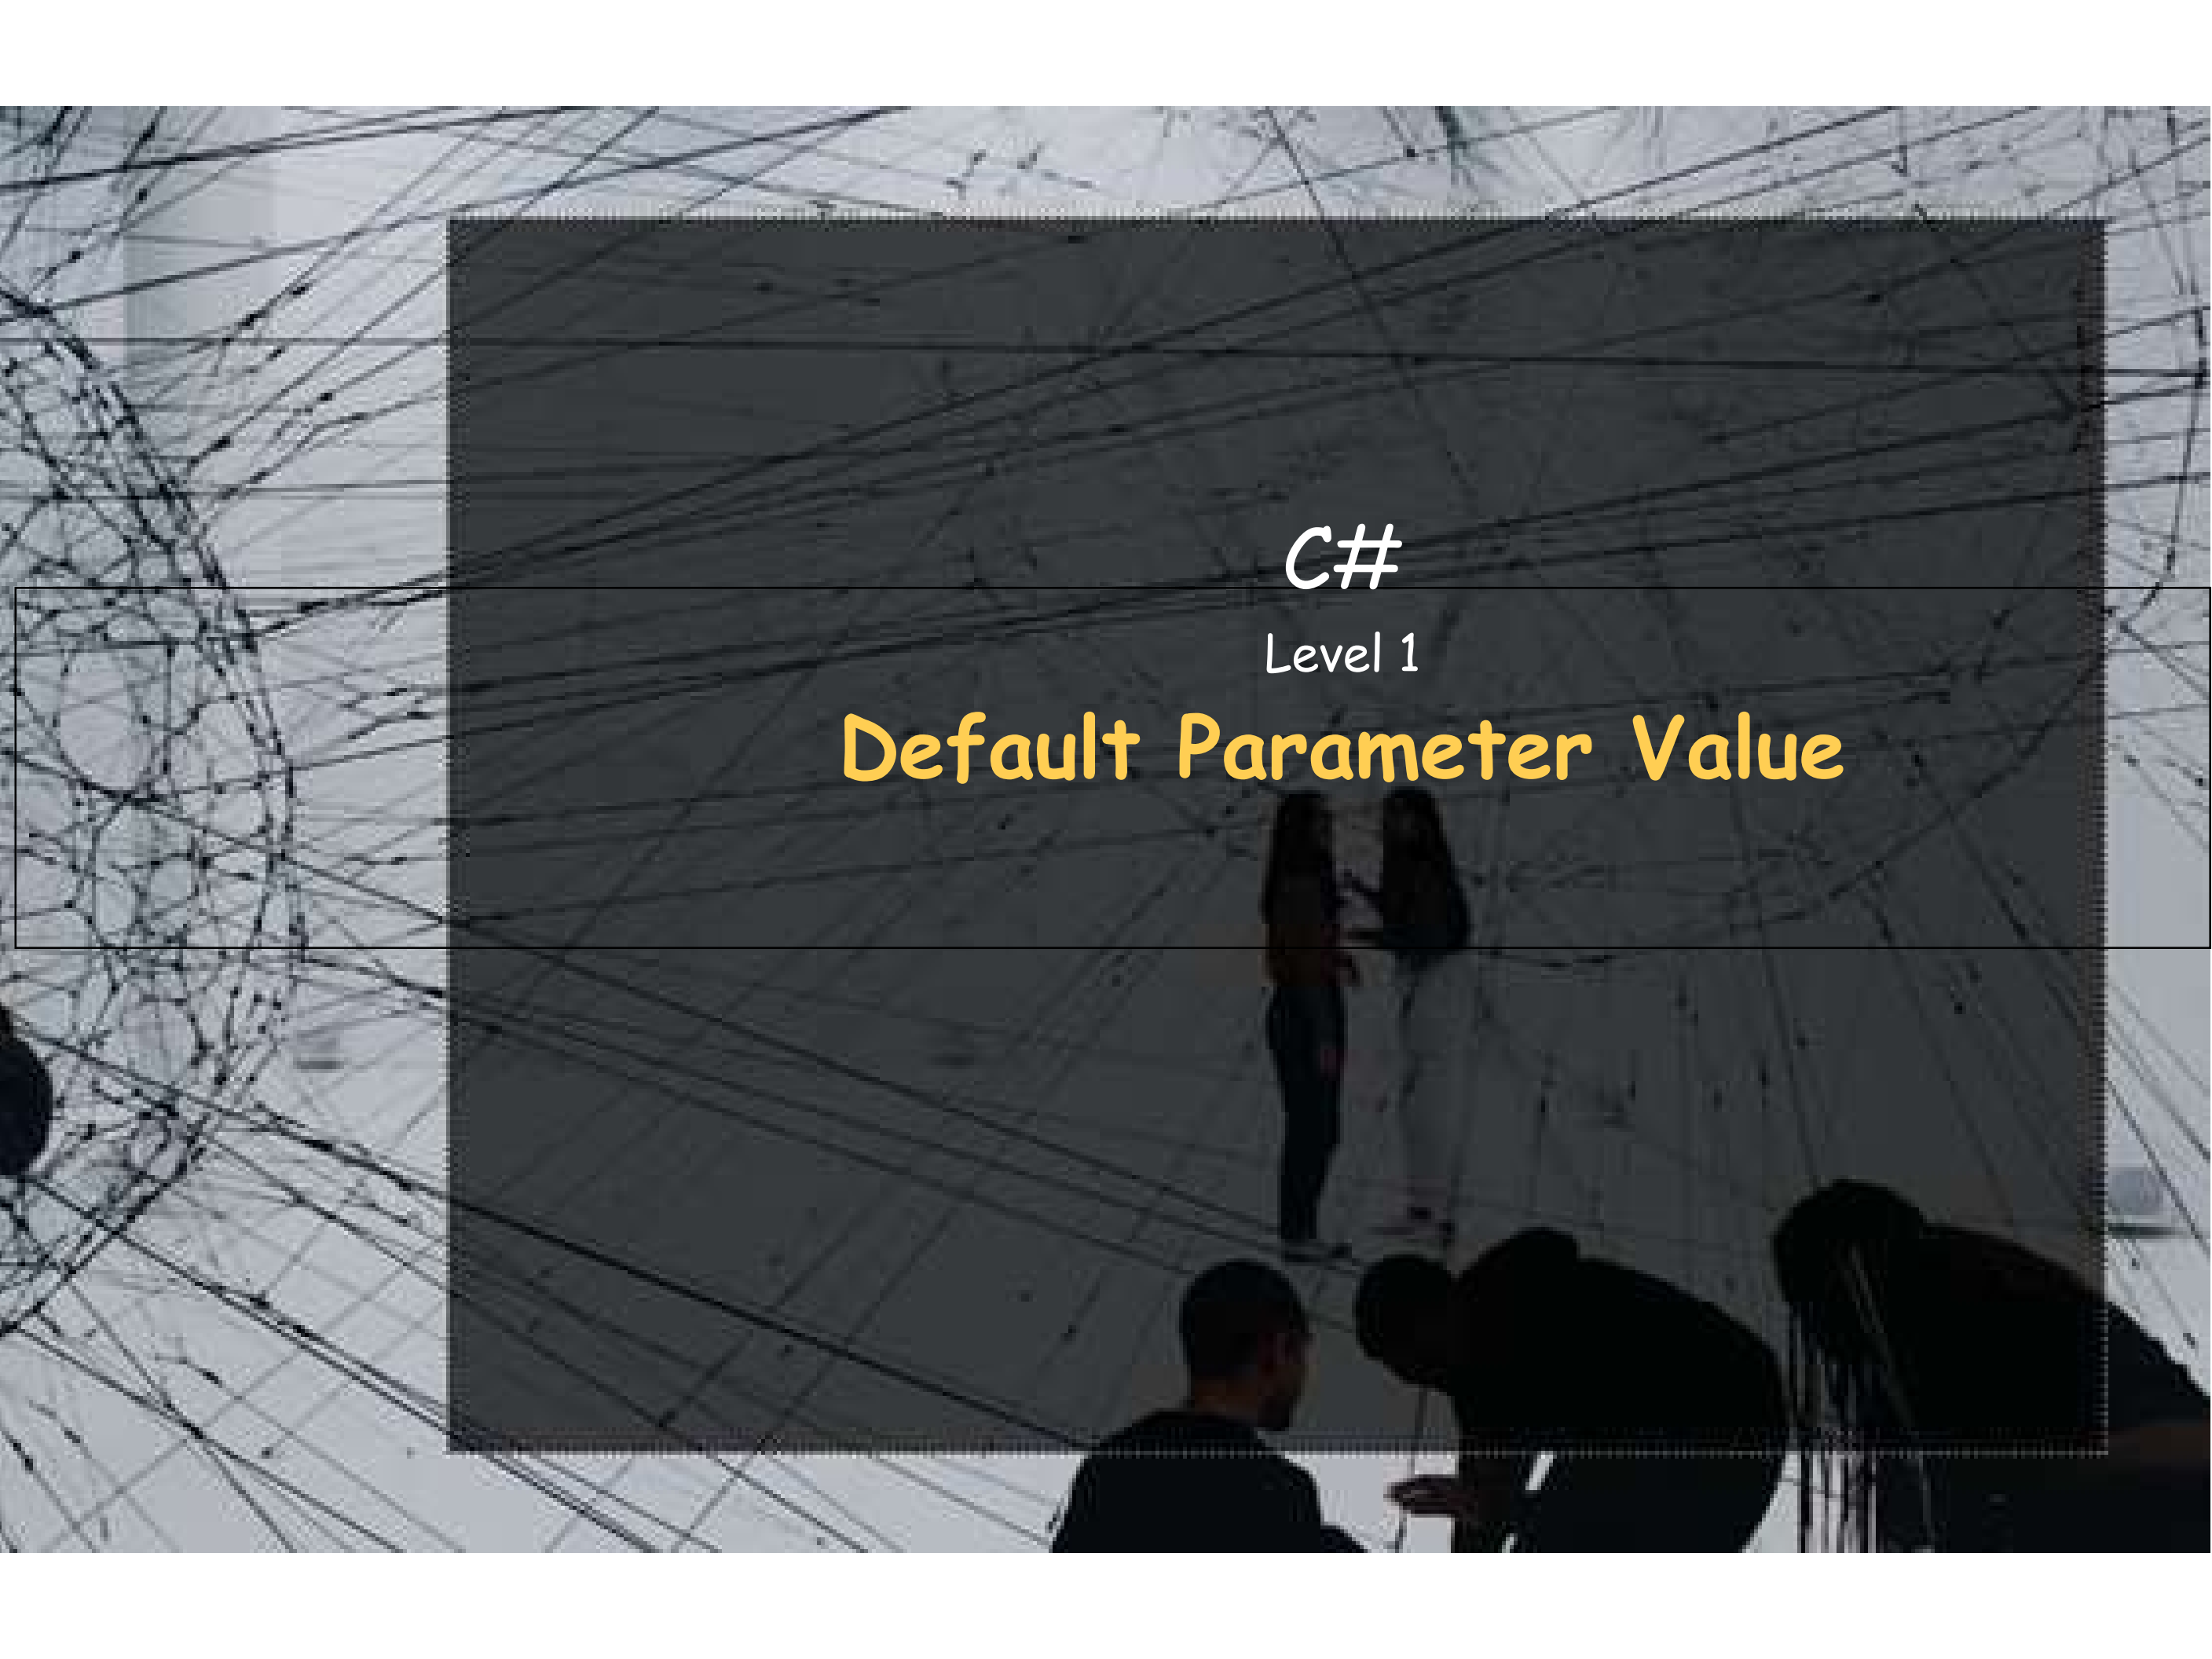

C#

Level 1

Default Parameter Value

Definition

Default Parameter Value

 A value automatically used when the caller does not provide an argument for that parameter.

 Defined using the equals sign `=`.

Explanation

Required Parameters

-  Must be provided when calling the method.
-  They should come before optional parameters.

Optional Parameter

-  Has a default value and can be omitted when calling the method.
-  If an argument is provided, it replaces the default value.

💡 Example

```
static void PrintMyInfo(string Name, int Age, string Address = "No Address")
{
    Console.WriteLine("Name= {0} , Age= {1}, Address= {2}", Name, Age, Address);
}
static void Main(string[] args)
{
    string Name, Address;
    int Age;
    Console.WriteLine("Enter your name:");
    Name = Console.ReadLine();
    Console.WriteLine("Enter your age:");
    Age = Convert.ToInt32(Console.ReadLine());
    PrintMyInfo(Name, Age);
    Console.WriteLine("Enter your name:");
    Name = Console.ReadLine();
    Console.WriteLine("Enter your age:");
    Age = Convert.ToInt32(Console.ReadLine());
    Console.WriteLine("Enter your Address:");
    Address = Console.ReadLine();
    PrintMyInfo(Name, Age, Address);
    Console.ReadKey();
}
```

💡 Example

➡ Result

Enter your name:

Sara

Enter your age:

45

Name = Sara , Age = 45, Address = No Address

Enter your name:

Sara

Enter your age:

45

Enter your Address:

Kolrevagen 5

Name = Sara, Age = 45, Address = Kolrevagen 5

Note

- ◆ `Name` and `Age` are required parameters.
- ◆ `Address` is an optional parameter with `"No Address"` as its default value.
- ◆ The caller can omit `Address` or provide a different value.

⊘ Warning

- ◆ Optional parameters should come after required parameters.

✦✦ Summary

- ✓ Use `=` to assign a default parameter value.
- ✓ The default is used when no argument is provided.
- ✓ A provided argument overrides the default value.

Thank you 😊