




C#

Level 1

Tic Tac Toe Game

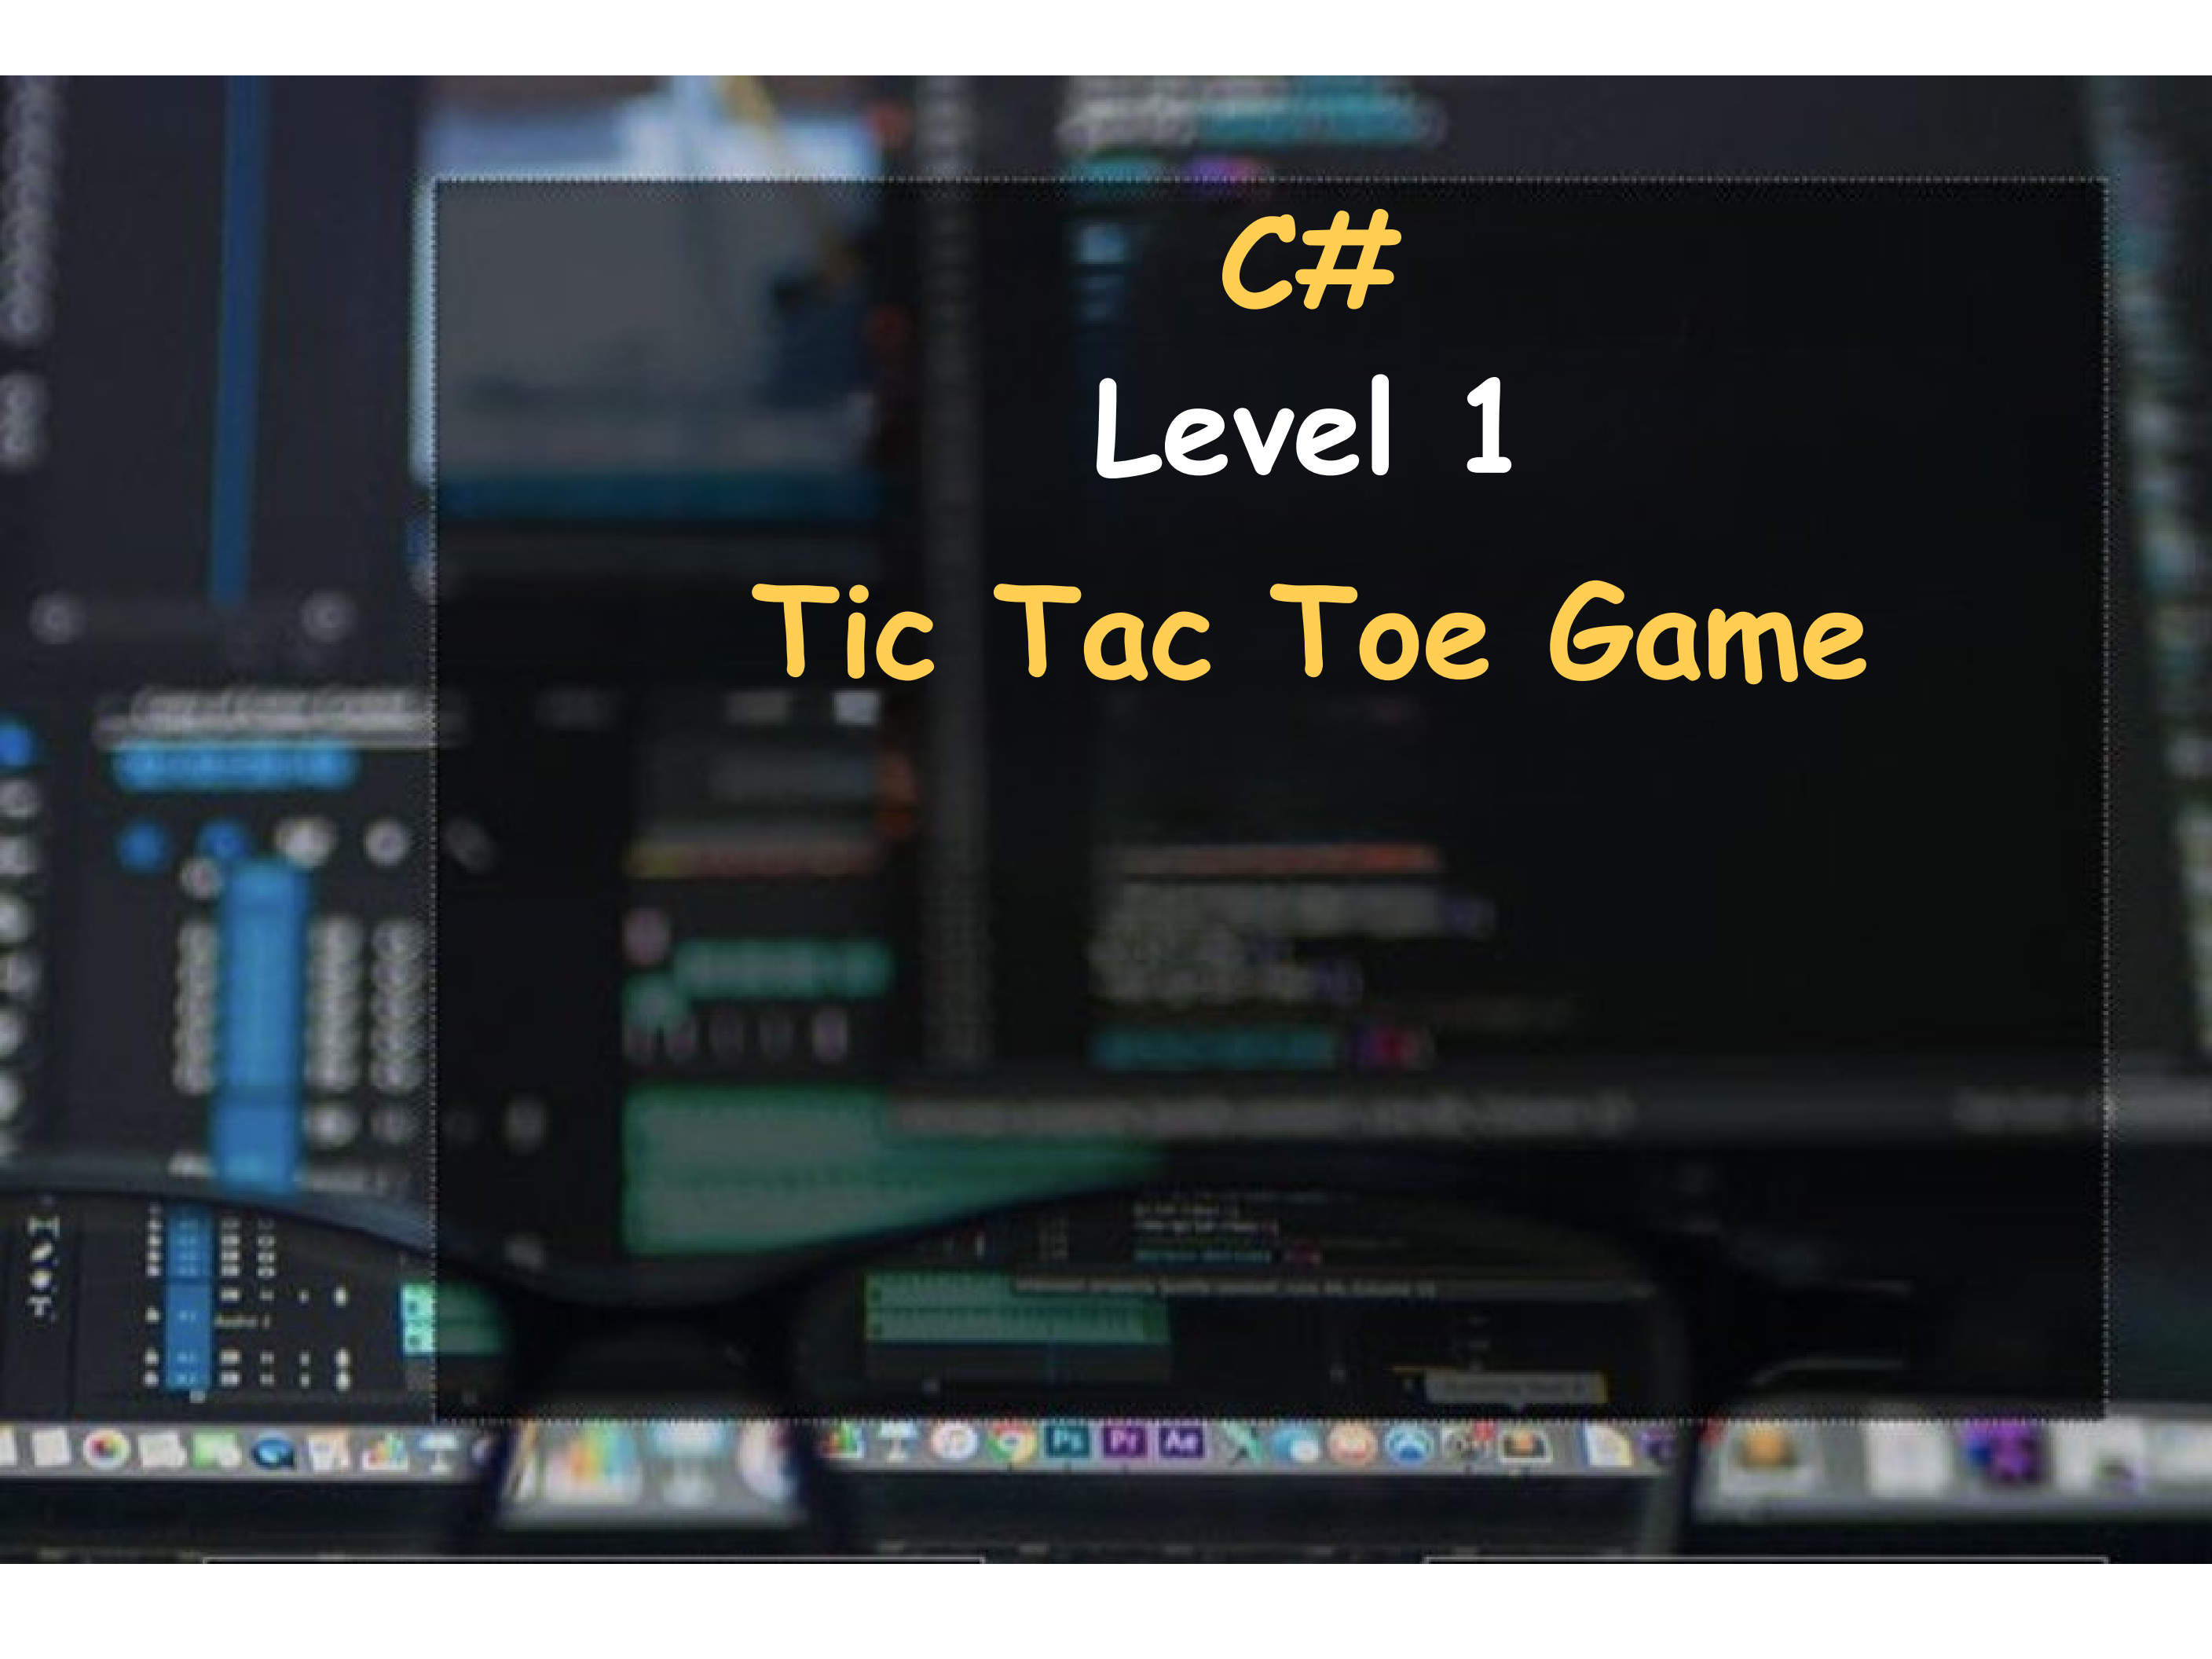

C#

Level 1

Tic Tac Toe Game

Definition

Tic-Tac-Toe Game

 A simple two-player game using 9 Label controls as the game cells.

 Player 1 uses X and Player 2 uses O.

Explanation

Game State

-  IsTurnPlayer1 determines whose turn it is.
-  IsGameOver determines whether players can continue playing.

Cell Click

-  The clicked Label is received through sender and cast to Label.
-  If the cell contains "?", the current player's symbol is placed.
-  The turn then switches to the other player.
-  Clicking an occupied cell shows a MessageBox notification.

WinLogic()

-  Checks all possible rows, columns, and diagonals for three matching symbols.
-  If a player wins, the game ends.
-  If all cells are occupied without a winner, the game is declared a draw.

ResetGame()

-  Resets all nine cells to "?".
-  Sets Player 1 as the starting player.
-  Sets IsGameOver to false and updates the turn label.

Procedure

1. Start the form and call `ResetGame()`.
2. Click an empty cell.
3. Place X or O according to the current turn.
4. Switch to the other player.
5. Check for a winner or draw using `WinLogic()`.
6. Use `New Game` to reset the board.

💡 Example

Player 1 → X

Player 2 → O

X		O		X
O		X		?
O		?		X

➡ Result

Player 1 Wins!

Note

- ◆ "?" represents an empty cell.
- ◆ All cells use the same lblQ_Click event handler.
- ◆ The sender object identifies which Label was clicked.

⊘ Warning

- ◆ A move is only allowed when `IsGameOver` is false.
- ◆ An occupied cell cannot be changed.
- ◆ After a winner is found, `WinLogic()` returns immediately.

✦ Summary

- ✓ Implements a two-player Tic-Tac-Toe game in Windows Forms.
- ✓ Uses Labels as the game cells.
- ✓ Handles turns, wins, occupied cells, and draws.
- ✓ ResetGame() starts a new game.

Thank you 😊