



Sprint 6 :

Drupal Essentials CookBook

Réalisé par :

Sara Akharraz

Encadrants :

M.Abdelmajid Bendrif

M.Hamza Bahlaouane

Entreprise :

Void

Drupal Installation, configuration & setup :

Installation, configuration & setup

Pré-requis

PHP :

```
➤ ~ git:(main) x php -v
PHP 8.5.2 (cli) (built: Jan 13 2026 21:40:53) (NTS)
Copyright (c) The PHP Group
Built by Homebrew
Zend Engine v4.5.2, Copyright (c) Zend Technologies
    with Zend OPcache v8.5.2, Copyright (c), by Zend Technologies
➤ ~ git:(main) x
```

sphp (to switch between versions) :

```
➤ ~ git:(main) x sphp
PHP Switcher - v1.1.0

Switch between Brew-installed PHP versions.

usage: sphp version [-sl-s=*] [-c=*]

    version    one of: 5.6 7.0 7.1 7.2 7.3 7.4 8.0 8.1 8.2 8.3 8.4 8.5
➤ ~ git:(main) x '
```

Setup : Avec DDEV

En suivant le tutoriel dans la vidéo ***Drupal Live Build: DDEV, GitHub, and Drupal Content Model***, j'ai pu installer Drupal via DDEV (localement) et créer un projet de gestion des tâches (une petite version de Jira) en implémentant les types de contenu, les champs, la taxonomie (statut) ainsi que les filtres dans les vues, tout en découvrant l'environnement Drupal.

Pour installer DDEV : ***DDEV Installation*** Affichez la version installée de DDEV pour vérifier qu'il est bien installé

```
ddev -v
```

On démarre les conteneurs Docker du projet DDEV :

```
ddev start
```

on peut Ouvrir une session shell à l'intérieur du conteneur web DDEV :

```
ddev ssh
```

Pour créer le projet Drupal :

```
ddev composer create drupal/recommended-project
```

Installer Drush (outil en ligne de commande pour Drupal) :


```
ddev composer require drush/drush
```

Pour installer Drupal automatiquement avec un compte administrateur admin/admin :

```
ddev drush site:install --account-name=admin --account-pass=admin -y
```

On Active ou configure Xdebug pour le débogage PHP dans DDEV :


ddev xdebug

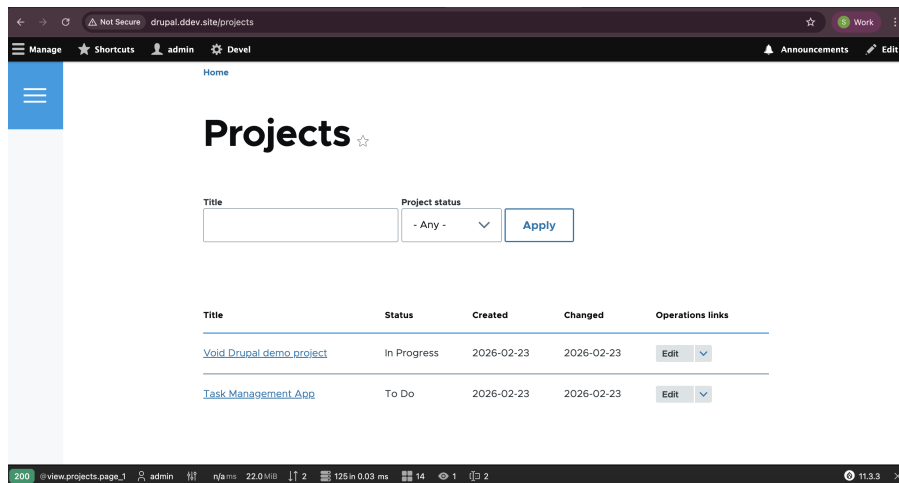

The screenshot shows the 'Projects' page in the DDEV web interface. At the top, there's a navigation bar with 'Manage', 'Shortcuts', 'admin', and 'Devel' tabs. Below this, the 'Projects' title is displayed with a star icon. A filter section includes a 'Title' input field and a 'Project status' dropdown menu set to '- Any -', with an 'Apply' button. Below the filter, a table lists projects:

Title	Status	Created	Changed	Operations links
Void Drupal demo project	In Progress	2026-02-23	2026-02-23	Edit ▼
Task Management App	To Do	2026-02-23	2026-02-23	Edit ▼

The bottom status bar shows the user is logged in as 'admin' and the page is 'view.projects.page_1'.

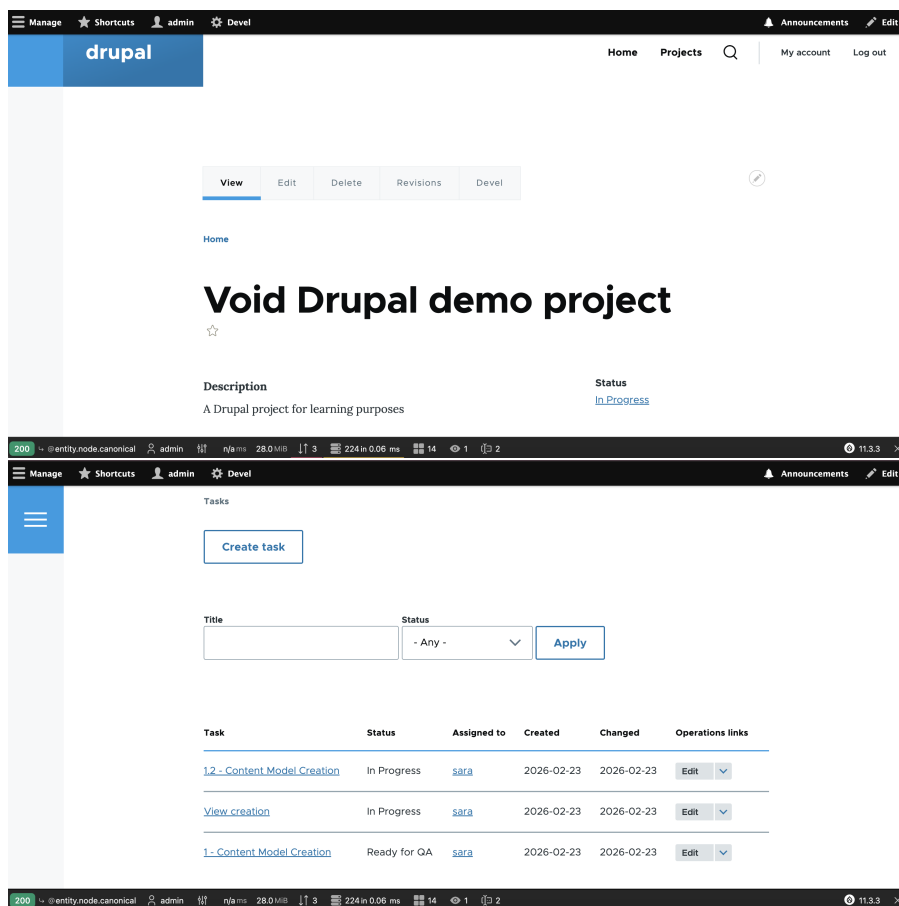

The screenshot shows the details page for the 'Void Drupal demo project'. The navigation bar is similar to the previous page. The project title 'Void Drupal demo project' is prominently displayed with a star icon. Below the title, there's a 'Description' section stating 'A Drupal project for learning purposes' and a 'Status' section showing 'In Progress' with a link. A 'Tasks' section is visible, featuring a 'Create task' button and a filter section with 'Title' and 'Status' dropdowns. Below the filter, a table lists tasks:

Task	Status	Assigned to	Created	Changed	Operations links
1.2 - Content Model Creation	In Progress	sara	2026-02-23	2026-02-23	Edit ▼
View creation	In Progress	sara	2026-02-23	2026-02-23	Edit ▼
1 - Content Model Creation	Ready for QA	sara	2026-02-23	2026-02-23	Edit ▼

The bottom status bar shows the user is logged in as 'admin' and the page is 'entity.node.canonical'.

The screenshots show the Drupal 11.3.3 interface for task management. The first screenshot displays the '1 - Content Model Creation' task page with a description 'creating content model ...' and a status of 'Ready for QA'. The second screenshot shows the 'Create Task' button and a form with 'Title' and 'Status' (set to '- Any -'). The third screenshot shows the '1.2 - Content Model Creation' task page with a description 'details (sub-task)', status 'In Progress', and due date 'Mon, 23 Feb 2026 - 12:00'.

—> *Lien vers le dépôt GitHub*

Setup : Sans DDEV

Mysqlq via docker :


```
docker run --name drupal-mysql \
-e MYSQL_ROOT_PASSWORD=root \
-e MYSQL_DATABASE=mon_db \
-e MYSQL_USER=sara \
-e MYSQL_PASSWORD=123 \
-p 3307:3306 \
-d mysql:8
```

```


-- git:(main) # docker run --name drupal-mysql \
-e MYSQL_ROOT_PASSWORD=root \
-e MYSQL_DATABASE=mon_db \
-e MYSQL_USER=sara \
-e MYSQL_PASSWORD=123 \
-p 3307:3306 \
-d mysql:8
Unable to find image 'mysql:8' locally
8: Pulling from library/mysql
7a0e4b0d9fe: Pull complete
3f7842a0b781: Pull complete
4a013345486: Pull complete
dbf081849b0d: Pull complete
6f9c4bee9463: Pull complete
31606846f27: Pull complete
c6cc6c69466c: Pull complete
3c4f5964ef58: Pull complete
a3385f68483e: Pull complete
af08ea884562: Pull complete
Digest: sha256:a2d126910bc2b079a890a8f6c2d305eb8b68fcbdd35c6a582c523df18for5ebb
Status: Downloaded newer image for mysql:8
b94a84ecaaff6: Pull complete
-- git:(main) # docker ps
CONTAINER ID   IMAGE      COMMAND                  CREATED          STATUS          PORTS
b94a84ecaaff6  mysql:8   "docker-entrypoint.sh"  11 seconds ago  Up 8 seconds   33060/tcp, 0.0.0.0:3307->3306/tcp, [::]:3307->3306/tcp

```


FIGURE 1 – Enter Caption

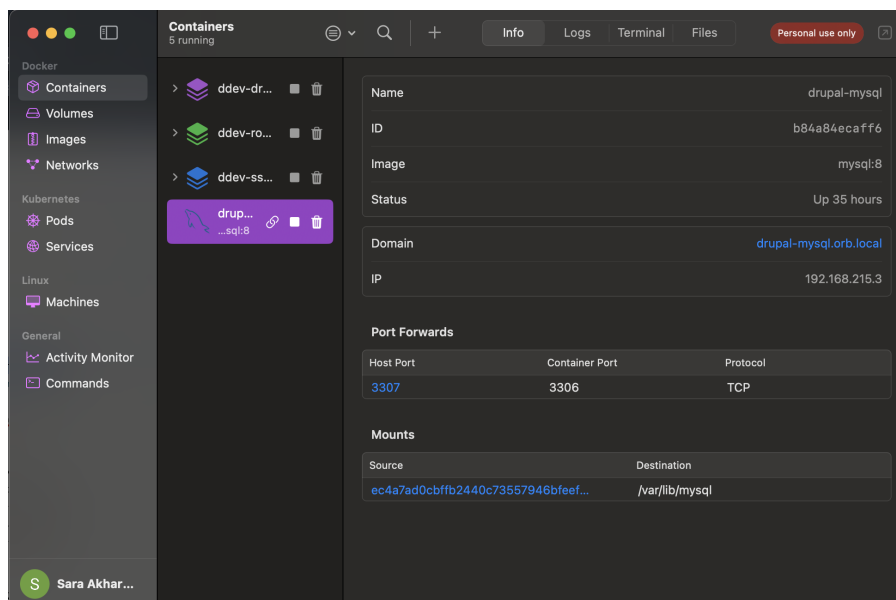

On vérifie TablePlus :

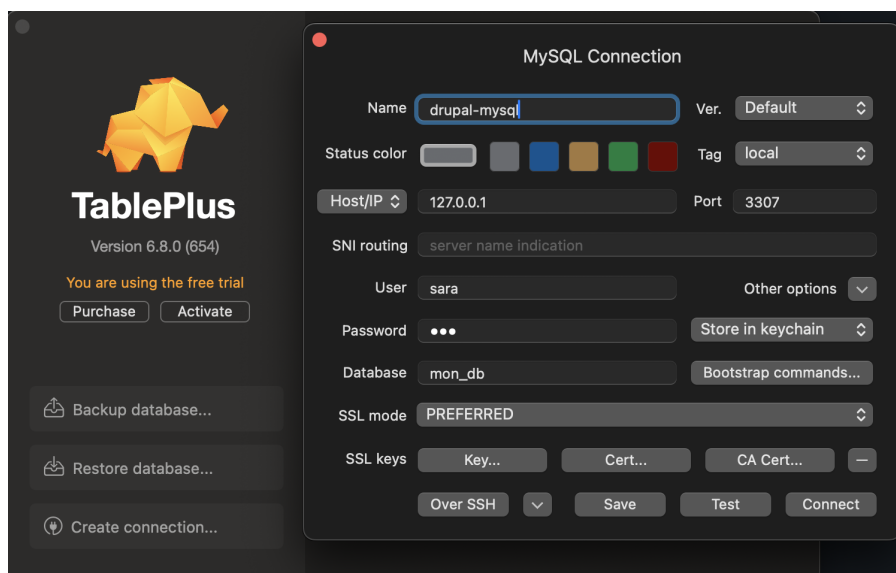


La connexion est bien établie :

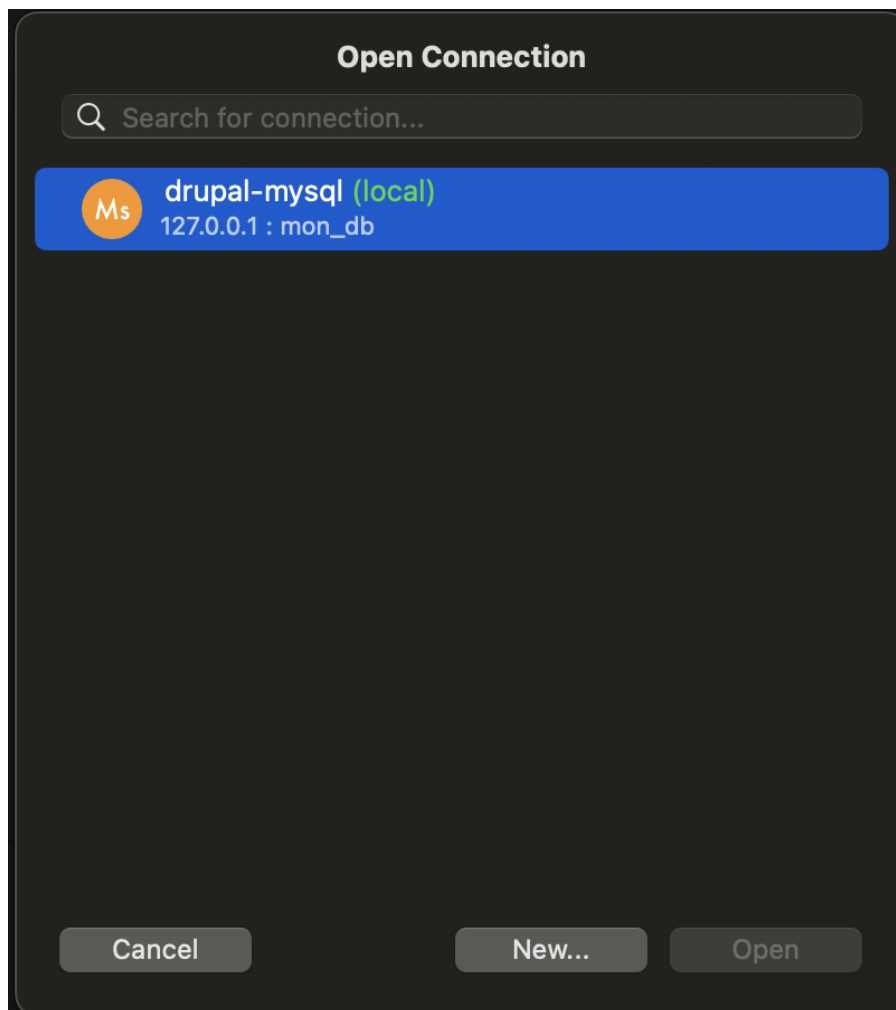

On génère un projet Drupal et on installe drush via :

```
composer create-project drupal/recommended-project drupal
composer require drush/drush
```

Résultat :

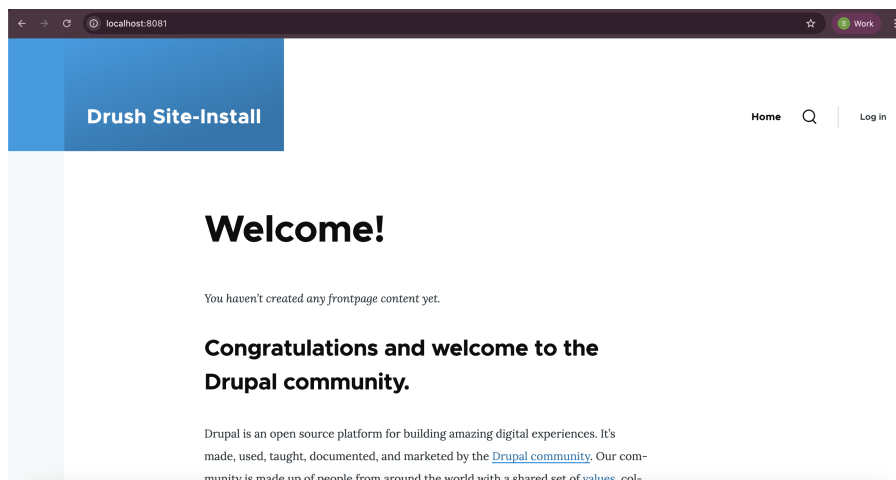

Pour vérifier l'état du Drupal :

```
./vendor/bin/drush status
```


```

drupal ./vendor/bin/drush status
Drupal version : 11.3.3
Site URI : http://default
DB driver : mysql
DB hostname : 192.168.215.3
DB port : 3306
DB username : root
DB name : mon_db
Database : Connected
Drupal bootstrap : Successful
Default theme : olivero
Admin theme : claro
PHP binary : /usr/local/Cellar/php/8.5.2/bin/php
PHP config : /usr/local/etc/php/8.5/php.ini
PHP OS : Darwin
PHP version : 8.5.2
Drush script : /usr/local/var/www/drupal/vendor/bin/drush.php
Drush version : 13.7.1.0
Drush temp : /tmp
Drush configs : /usr/local/var/www/drupal/vendor/drush/drush/drush.yml
Install profile : standard
Drupal root : /usr/local/var/www/drupal/web
Site path : sites/default
Files, Public : sites/default/files
Files, Temp : /tmp
Drupal config : sites/default/files/config_uT6SPUkeFxn23HCNP4MH-IiX63ILZj6StLKbkgHfzQPgaBPRQ2C3mpVAAmvzJVyD2179bx2Rg/sync
drupal

```

On se connecte autant qu'admin :

```
./vendor/bin/drush user:password admin "admin"
```

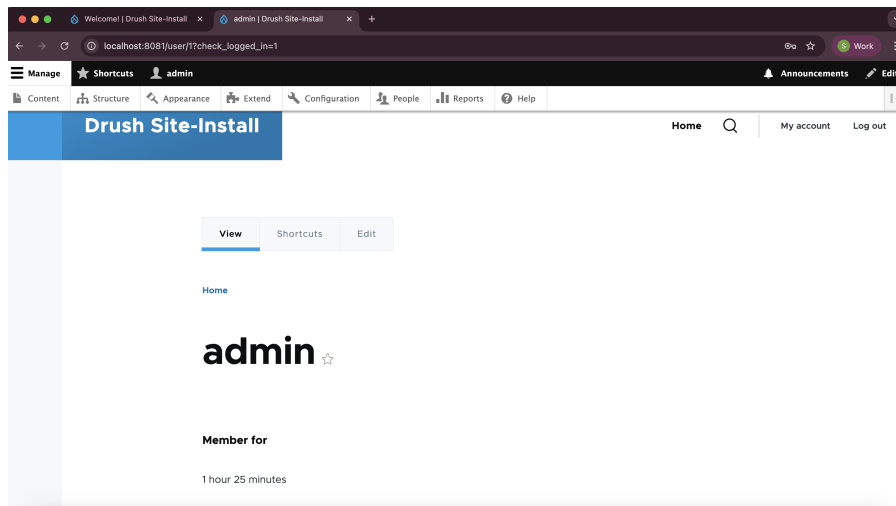

Pour vider le cache :

```
./vendor/bin/drush cr
```

```

drupal ./vendor/bin/drush cr
[success] Cache rebuild complete.

```

Débogage et problèmes courants dans Drupal


NB

pour taper directement dush , pn peut faire


```
export PATH="./vendor/bin:$PATH"
```

elle ajoute un dossier au PATH (la liste des dossiers où le système cherche les commandes). Mais ,C'est temporaire
 .(Pour le rendre permanent, on ajoute la ligne à / .zshrc ou / .bash_profile)

[Setup Home Page :](#)

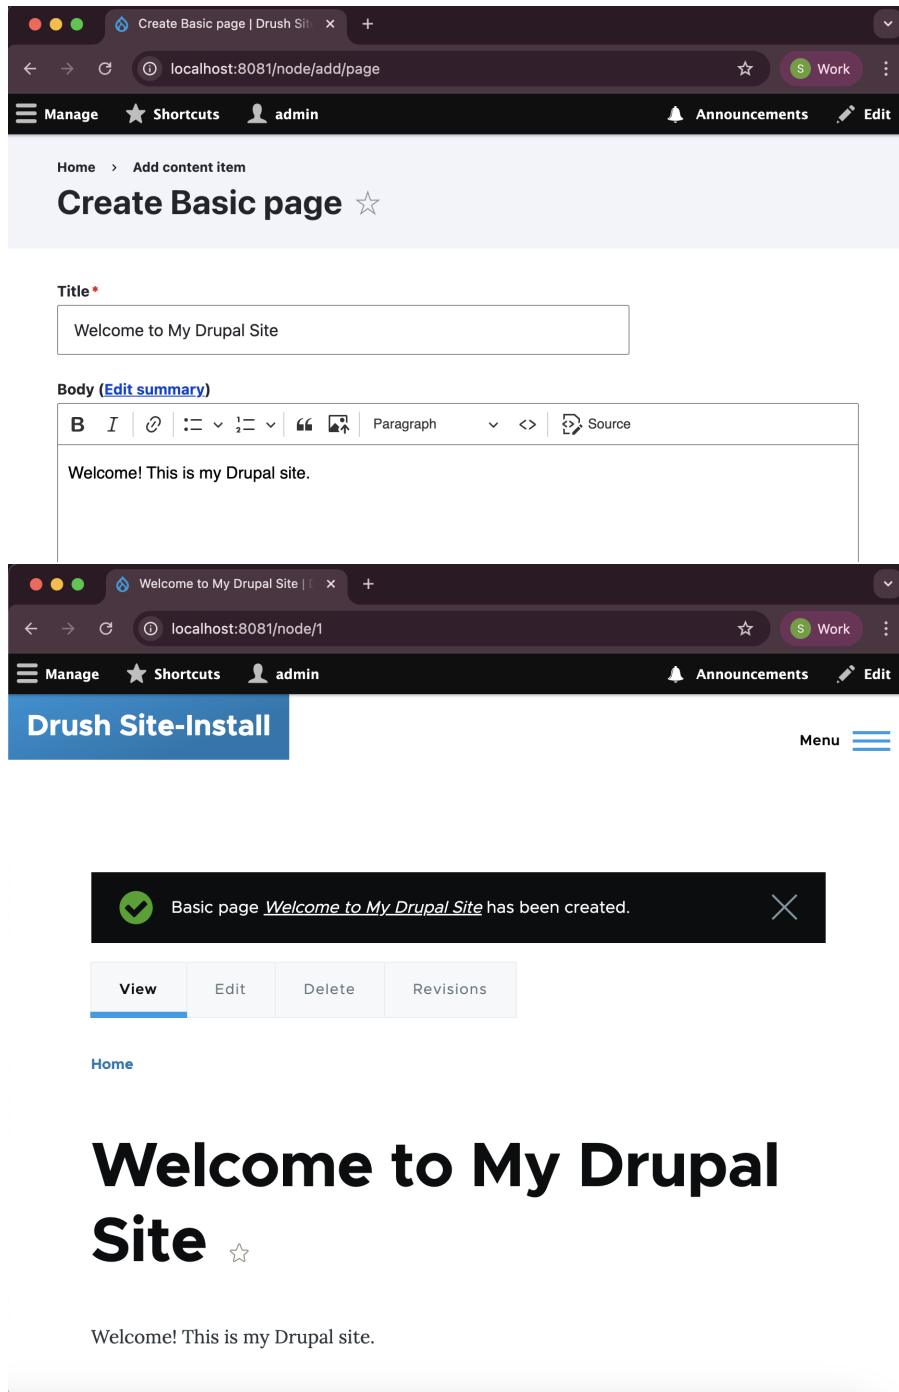


front page config

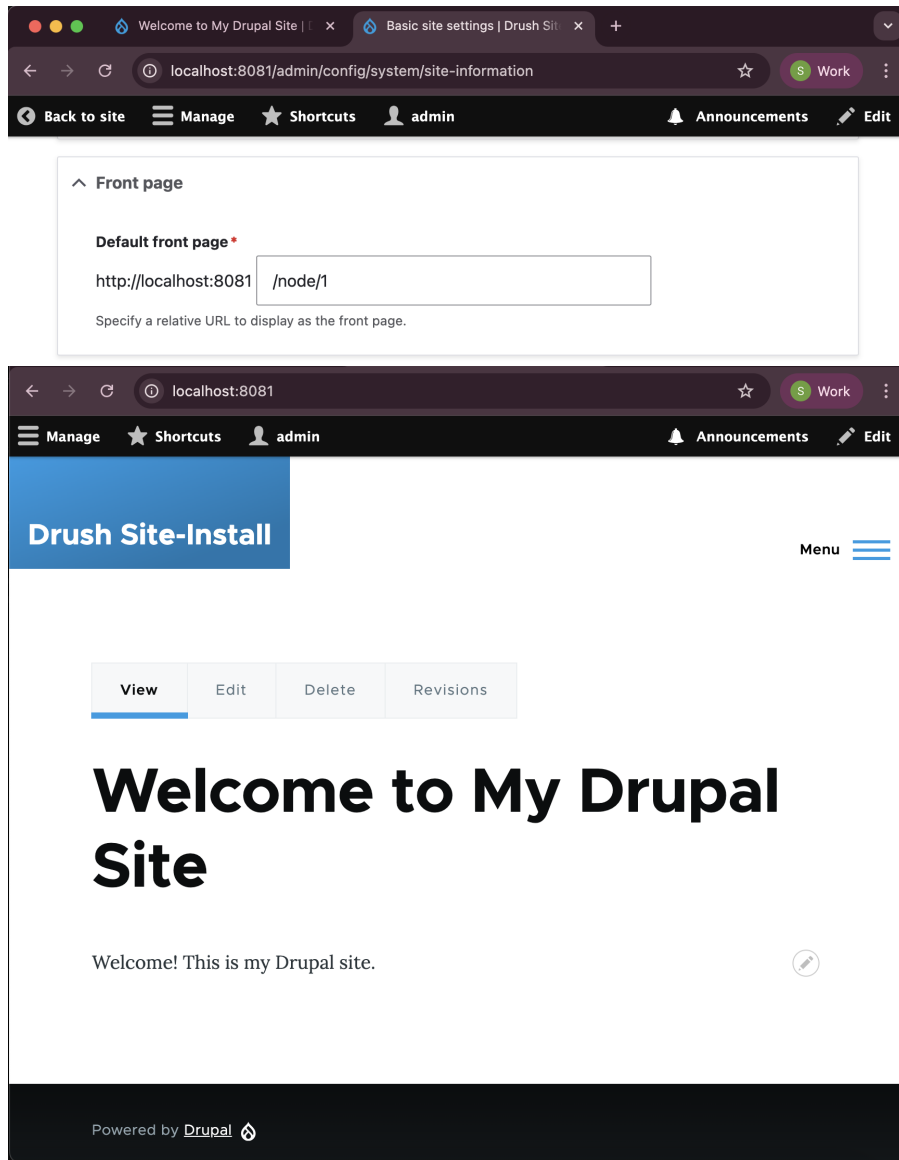

Configure users :

Les visiteurs peuvent créer un compte, mais leur inscription doit être validée par l'administrateur : On crée le rôle "Webmaster"

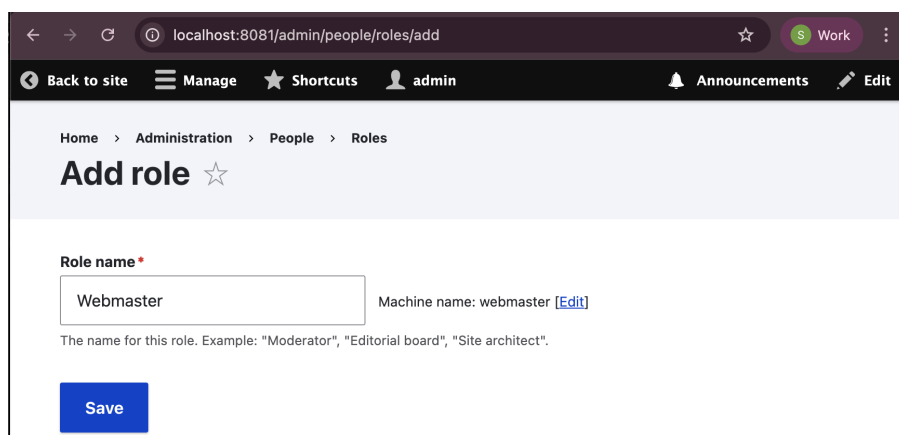

← → ↻ localhost:8081/admin/config/people/accounts ☆ S Work ⋮

⏪ Back to site ≡ Manage ★ Shortcuts 👤 admin 🔔 Announcements ✎ Edit

^ Registration and cancellation

Who can register accounts?

☐ Administrators only

☐ Visitors

☒ Visitors, but administrator approval is required

☒ Require email verification when a visitor creates an account

New users will be required to validate their email address prior to logging into the site, and will be assigned a system-generated password. With this setting disabled, users will be logged in immediately upon registering, and may select their own passwords during registration.

☒ Enable password strength indicator

When cancelling a user account

☒ Disable the account and keep its content.

☐ Disable the account and unpublish its content.

☐ Delete the account and make its content belong to the *Anonymous* user. This action cannot be undone.

Users with the *Select method for cancelling account* or *Administer users* [permissions](#) can override this default method.

← → ↻ localhost:8081/admin/people/create 🔍 ☆ S Work ⋮

⏪ Back to site ≡ Manage ★ Shortcuts 👤 admin 🔔 Announcements ✎ Edit

Home > Administration > People

Add user ☆

This web page allows administrators to register new users. Users' email addresses and usernames must be unique.

Email address

s.akharraz@example.com

The email address is not made public. It will only be used if you need to be contacted about your account or for opted-in notifications.

Username*

sara

Several special characters are allowed, including space, period (.), hyphen (-), apostrophe ('), underscore (_), and the @ sign.

Password*

.....

Password strength: **Strong**

Confirm password*

.....

Passwords match: **yes**

Provide a password for the new account in both fields.

Status

☐ Blocked

☒ Active

Roles

☒ Authenticated user

☐ Content editor

☐ Administrator

☒ Webmaster

☐	Username	Roles	Operations
☐	sara	• Webmaster	Edit v
☐	admin	• Administrator	Edit v

Configure Regional & dates Regional settings : First day of week Monday

← → ↻ localhost:8081/admin/config/regional/settings ☆ S Work ⋮

⏪ Back to site ⋮ Manage ☆ Shortcuts 👤 admin 🔔 Announcements ✎ Edit

Home > Administration > Configuration > Region and language

Regional settings ☆

^ Locale

Default country

- None -

First day of week

Monday

File System :

← → ↻ localhost:8081/admin/config/media/file-system ☆ S Work ⋮

⏪ Back to site ⋮ Manage ☆ Shortcuts 👤 admin 🔔 Announcements ✎ Edit

changed in settings.php.

Default download method

☒ Public local files served by the webserver.

This setting is used as the preferred download method. The use of public files is more efficient, but does not provide any access control.

Delete temporary files after

Never

Temporary files are not referenced, but are in the file system and therefore may show up in administrative lists. **Warning:** If enabled, temporary files will be permanently deleted and may not be recoverable.

^ Sanitize filenames

These settings only apply to new files as they are uploaded. Changes here do not affect existing file names.

Replacement character

Dash (-)

Used when replacing whitespace, replacing non-alphanumeric characters or transliterating unknown characters.

☐ Transliterate

Transliteration replaces any characters that are not alphanumeric, underscores, periods or hyphens with the replacement character. It ensures filenames only contain ASCII characters. It is recommended to keep transliteration enabled.

☒ Replace whitespace with the replacement character

Images

← → ↻ localhost:8081/admin/config/media/image-toolkit ☆ S Work ⋮

⌕ Back to site ≡ Manage ★ Shortcuts 👤 admin 🔔 Announcements ✎ Edit

Home > Administration > Configuration > Media

Image toolkit ☆

Select an image processing toolkit

☒ GD2 image manipulation toolkit

^ GD2 image manipulation toolkit settings

JPEG quality

100

%

Define the image quality for JPEG manipulations. Ranges from 0 to 100. Higher values mean better image quality but bigger files.

Save configuration

Cron

← → ↻ localhost:8081/admin/config/system/cron ☆ S Work ⋮

⌕ Back to site ≡ Manage ★ Shortcuts 👤 admin 🔔 Announcements ✎ Edit

Cron takes care of running periodic tasks like checking for updates and indexing content for search.

Run cron

Last run: 1 hour 18 minutes ago.

To run cron from outside the site, go to http://localhost:8081/cron/tP5i3f41pl4X2SwSICl4gTnhQML-P05h0P0hOIQYAXtGvJhu0bXf4DS3Q8zrM0-dtGhfdwn_KgQ

^ Cron settings

☒ Detailed cron logging

Run times of individual cron jobs will be written to watchdog

Run cron every

Never

▼

More information about setting up scheduled tasks can be found by [reading the cron tutorial on drupal.org](#).

Save configuration

Check Status Reports

localhost:8081/admin/reports/status

Back to site Manage Shortcuts admin Announcements Edit

Home > Administration > Reports

Status report ☆

Here you can find a short overview of your site's parameters as well as any problems detected with your installation. It may be useful to copy and paste this information into support requests filed on Drupal.org's support forums and project issue queues. Before filing a support request, ensure that your web server meets the [system requirements](#).

2 Errors
[Details](#)

25 Checked
[Details](#)

Status Details

^ Errors found

	File system	Writable (<i>public</i> download method) The directory <code>sites/default/files</code> is not writable. You may need to set the correct directory at the file system settings page or change the current directory's permissions so that it is writable.
	Trusted Host Settings	Not enabled The <code>trusted_host_patterns</code> setting is not configured in <code>settings.php</code> . This can lead to security vulnerabilities. It is highly recommended that you configure this. See Protecting against HTTP HOST Header attacks for more information.

Après correction :

problem 01 : Drupal needs to upload files (images, documents, etc.) to the folder `sites/default/files/`. But the folder doesn't have write permission. Apache's user (`_www`) can't write to it.

```
sudo chown -R _www:_www /usr/local/var/www/drupal/web/sites/default/files
```

problem 02 : Trusted Host Problem On ajoute au fichier `settings.php` :

```
$settings['trusted_host_patterns'] = [
  '^localhost$',
];
```

localhost:8081/admin/reports/status

Back to site Manage Shortcuts admin Announcements Edit

Home > Administration > Reports

Status report ☆

Here you can find a short overview of your site's parameters as well as any problems detected with your installation. It may be useful to copy and paste this information into support requests filed on Drupal.org's support forums and project issue queues. Before filing a support request, ensure that your web server meets the [system requirements](#).

27 Checked
[Details](#)

Translation :

```
drupal git:(main) drush en config_translation content_translation -y
The following module(s) will be installed: config_translation, content_translation, locale, language

// Do you want to continue?: yes.

[success] Module config_translation has been installed. (Permissions - Configure)
[success] Module content_translation has been installed. (Permissions - Configure)
[success] Module locale has been installed. (Permissions - Configure)
[success] Module language has been installed. (Permissions - Configure)
drupal git:(main)
```

localhost:8081/admin/config/regional/language/add

Back to siteManageShortcutsadminAnnouncementsEdit

Home > Administration > Configuration > Region and language > Languages

Add language

Add a language to be supported by your site. If your desired language is not available, pick *Custom language...* at the end and provide a language code and other details manually.

Language name

French

Add language

interface text language detection :

localhost:8081/admin/config/regional/language/detection

Back to siteManageShortcutsadminAnnouncementsEdit

Order of translation or language detection methods on this page. The chosen language can be changed in the [list of languages](#).

Interface text language detection

Order of language detection methods for interface text. If a translation of interface text is available in the detected language, it will be displayed.

Show row weights

Detection method	Description	Enabled	Operations
÷ Account administration pages	Account administration pages language setting.	☐	
÷ URL	Language from the URL (Path prefix or domain).	☒	Configure
÷ Session	Language from a request/session parameter.	☐	Configure
÷ User	Follow the user's language preference.	☐	
÷ Browser	Language from the browser's language settings.	☐	Configure
÷ Selected language	Language based on a selected language.	☒	Configure

← → ↺

localhost:8081/admin/config/regional/language/detection/selected

☆ S Work ⋮

⏪ Back to site

☰ Manage

★ Shortcuts

👤 admin

🔔 Announcements

✎ Edit

Home > Administration > Configuration > Region and language > Languages > Detection and selection

Selected language configuration ☆

✓ Status message

The configuration options have been saved.

Changing the selected language here (and leaving this option as the last among the detection and selection options) is the easiest way to change the fallback language for the website, if you need to change how your site works by default (e.g., when using an empty path prefix or using the default domain). [Changing the site's default language](#) itself might have other undesired side effects.

Language

English ▼

Save configuration

← → ↺

localhost:8081/admin/structure/types/manage/article

☆ S Work ⋮

⏪ Back to site

☰ Manage

★ Shortcuts

👤 admin

🔔 Announcements

✎ Edit

Displays on the *Content types* page.

Submission form settings

Title

Publishing options

Published, Promoted to front page, Create new revision

Language settings

Site's default language (English), Show language selector on create and edit pages, Enable translation

Display settings

Display author and date information

Menu settings

Default language

Site's default language (English) ▼

Explanation of the language options is found on the [languages list page](#).

☒ Show language selector on create and edit pages

☒ Enable translation

Save

🗑 Delete

14

← → ↻ localhost:8081/admin/config/regional/language/detection/url ☆ S Work ⋮

⏪ Back to site ⋮ Manage ☆ Shortcuts 👤 admin 🔔 Announcements ✎ Edit

Part of the URL that determines language

☒ Path prefix
☐ Domain

^ Path prefix configuration

Language codes or other custom text to use as a path prefix for URL language detection. For the selected fallback language, this value may be left blank. **Modifying this value may break existing URLs. Use with caution in a production environment.** Example: Specifying "deutsch" as the path prefix code for German results in URLs like "example.com/deutsch/contact".

English (en) path prefix (Default language)
 http://localhost:8081/

French (fr) path prefix
 http://localhost:8081/

Save configuration

← → ↻ localhost:8081/en/admin/config/regional/content-language ☆ S Work ⋮

⏪ Back to site ⋮ Manage ☆ Shortcuts 👤 admin 🔔 Announcements ✎ Edit

Custom language settings

☐ Comment
☒ Content
☐ Content block
☐ Custom menu link
☐ File
☐ Shortcut link
☐ Taxonomy term
☒ URL alias
☐ User

^ Content

Translatable	Content type	Configuration
☒	Article	Default language Site's default language (English) ▼ Explanation of the language options is found on the languages list page. ☒ Show language selector on create and edit pages ☐ Hide non translatable fields on translation forms

NB :Toujours utiliser Drush pour (dés)installer des modules. **Pourquoi?** :

Drush utilise le PHP en ligne de commande (CLI) Le PHP CLI a souvent un memory_limit plus élevé L'interface web peut planter si le module est lourd -> Donc via Drush, il y a moins de risques de crash .

NB : On ne traduit jamais une référence ,on traduit les entités.!

localhost:8081/fr/node/2/translations/add/en/fr

Manage
Shortcuts
admin
Announcements
Edit

Create *French* translation of *Translation Test for an article*

Title

Test de traduction pour un article

Image

Add a new file

Choose File
No file chosen

One file only.
2 MB limit.
Allowed types: png gif jpeg webp.

Body
(Edit summary)

B
I
Link
List
Table
Quote
Image
Paragraph
Source

Ceci est un article de test rédigé en anglais.
Cet article sera également disponible en français.

English

localhost:8081/en/node/2

Manage
Shortcuts
admin
Announcements
Edit

View
Edit
Delete
Revisions
Translate

Home

Translation Test for an article


By [admin](#), 24 February 2026

This is a test article written in English .

this article will also be available in French .

Comments



french :

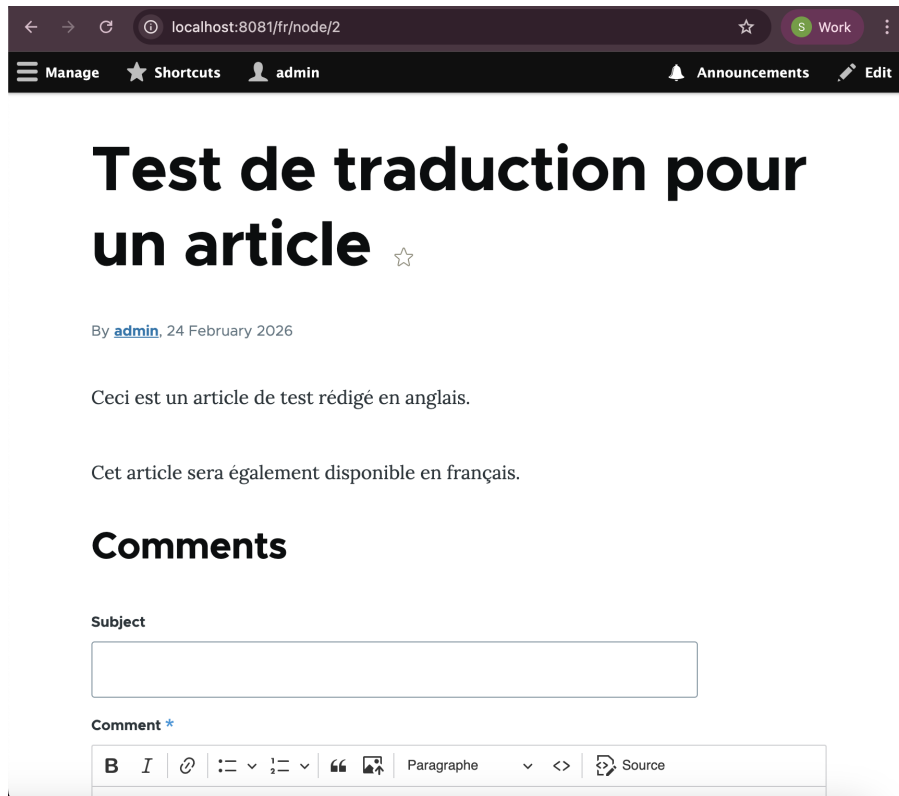


Problème : Le visiteur ne peut pas switcher aisement entre les différents langages : Solution : On ajoute un Language switcher via :

`composer require 'drupal/lang_dropdown:~2.4'`


we place it in the primary menu :

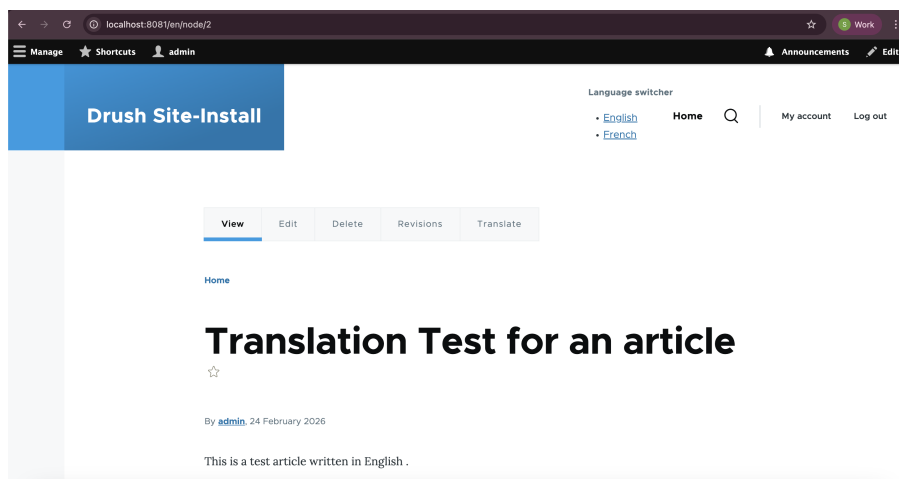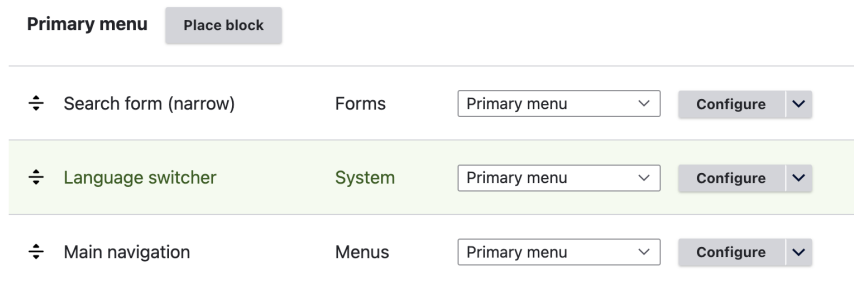

Basic page : En suivant les mêmes étapes : english :

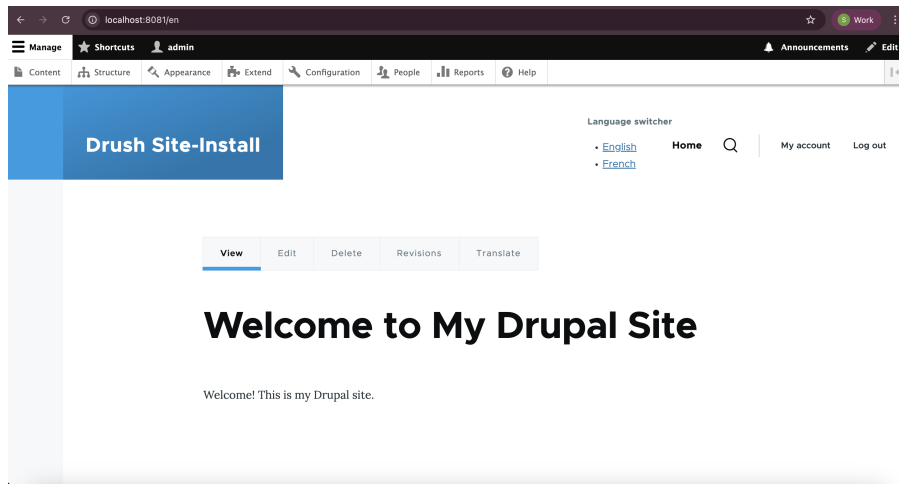

french :

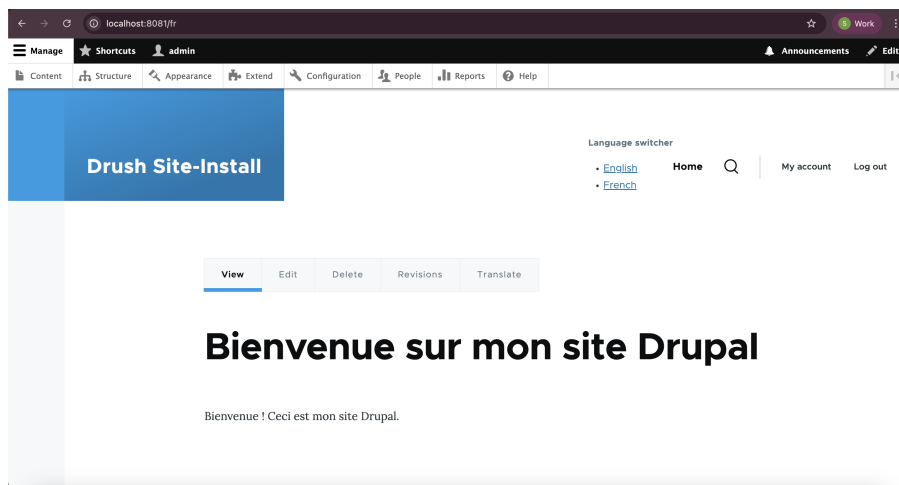

Media :

On active les modules Media :

```
drush en media media_library -y
```

On ajoute des permissions au role Webmaster

localhost:8081/admin/structure/media/manage/document/fields/

Back to site Manage Shortcuts admin Announcements Edit

Document settings for Document

Instructions to present to the user below this field on the editing form.
 Allowed HTML tags: <a> <big> <code> <i> <ins> <pre> <q> <small> <sub> <sup> <tt> <p>
 This field supports tokens.

☒ Required field

☒ Users may translate this field
 To configure translation for this field, [enable language support](#) for this type.

Allowed file extensions *

odf, odg, odp, ods, odt, fodt, fods, fodp, fodg, key, numbers, pages, csv

Separate extensions with a comma or space. Each extension can contain alphanumeric characters, '.', and '_', and should start and end with an

Resultat :

localhost:8081/media/add/document

Manage Shortcuts admin Announcements Edit

Home > Add media item

Add Document

Document

people-100.csv (11.16 KB) Remove

Revision information
 No revision

URL alias
 No alias

Authoring information
 By admin (1) on 2026-02-24

☒ Published

Save

Revision log message
 No file chosen

Briefly describe the changes you have made.

Où sont stockés les fichiers ? Stockage publique : (sites/default/files : accessible via URL)
 Via l'url : http://localhost:8081/admin/config/media/file-system


Public file base URL

http://localhost:8081/sites/default/files

The base URL that will be used for public file URLs. This can be changed in settings.php

the uri :

http://localhost:8081/sites/default/files/2026-02/people-100.csv

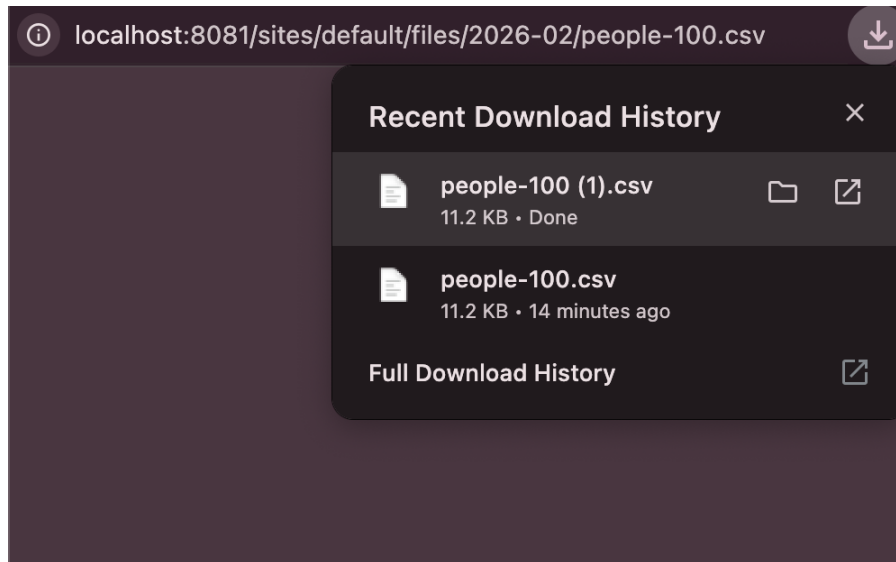

Stockage privé :(sites/default/private : protégé par Drupal)

Private file system path

Not set

An existing local file system path for storing private files. It should be writable by Drupal and not accessible over the web. This must be changed in settings.php

```
drupal git:(main) x sudo mkdir -p sites/default/private
drupal git:(main) x sudo chown -R _www:_www sites/default/private
drupal git:(main) x sudo chmod 775 sites/default/private
drupal git:(main) x
```

Le chemin du système de fichiers privé doit être défini dans le fichier settings.php :

```
$settings['file_private_path'] = 'sites/default/private';
```

Private file system path

sites/default/private

An existing local file system path for storing private files. It should be writable by Drupal and not accessible over the web. This must be changed in settings.php

```
drupal git:(main) x sudo mkdir -p sites/default/private
drupal git:(main) x sudo chown -R _www:_www sites/default/private
drupal git:(main) x sudo chmod 777 sites/default/private
drupal git:(main) x
```

Default download method

☐ Public local files served by the webserver.

☒ Private local files served by Drupal.

This setting is used as the preferred download method. The use of public files is more efficient, but does not provide any access control.

Document settings for Document

Label
Document

Field Storage

These settings apply to the *Document* field everywhere it is used. Some also impact the way that data is stored and cannot be changed once data has been created.

☐ Enable *Display* field

The display option allows users to choose if a file should be shown when viewing the content.

Upload destination

☐ Public files
☒ Private files

Select where the final files should be stored. Private file storage has significantly more overhead than public files, but allows restricted access to files within this field.

Save settings

```

drupal git:(main) x sudo mkdir -p web/sites/default/private
Password:
drupal git:(main) x sudo chown -R _www:_www web/sites/default/private
drupal git:(main) x sudo chmod -R 777 web/sites/default/private
drupal git:(main) x drush cr

```

MIME types : Définit le type de contenu pour le système / navigateur

localhost:8081/en/admin/structure/file-types/manage/document/edit?destination=/en/admin/structure/file-types

Back to site
Manage
Shortcuts
admin
Go to
Announcements
Edit

Content
Structure
Appearance
Extend
Configuration
People
Reports
Help

Manage file types

Edit
Manage fields
Manage form display
Manage display
Translate file type

Label
Document
Machine name: document

The human-readable name of the file type.

Description
A Document file is written information.
A brief description of this file type.

MIME types
text/plain
application/msword
application/vnd.ms-excel
application/pdf
application/vnd.ms-powerpoint


La différence entre type image et image(media)

Image field_image Single	Image	Edit
Photo field_photo Single	Entity reference Reference type: Media Media type: Image	Edit

Le champ Image attache une image directement à l'article : chaque upload crée un nouveau fichier et il n'est pas facilement réutilisable.

22

Le champ Media (Photo) utilise la bibliothèque média : l'image est enregistrée comme média réutilisable et peut être utilisée dans plusieurs contenus sans être dupliquée.

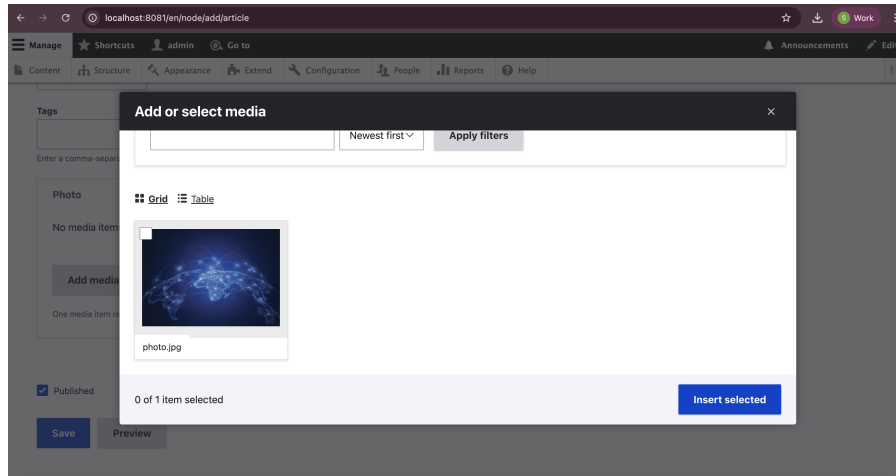


Step Back :

Cookie Settings :

```
composer require drupal/eu_cookie_compliance
```

Problème :

- the Privacy Policy link still points to the homepage
- but GDPR requires a dedicated privacy policy page



Solution :

we add a page for cookie settings (/privacy-policy)

Privacy policy

Privacy policy link *

Enter link to your privacy policy or other page that will explain cookies to your users, external links should start with http:// or https://.

☒ Open privacy policy link in a new window.

Back to site Manage Shortcuts admin Go to

Content Structure Appearance Extend Configuration People Reports Help

Add URL alias

Enter the path you wish to create the alias for, followed by the name of the new alias.

Language

English

A path alias set for a specific language will always be used when displaying this page in that language, and takes precedence over path aliases set as -- Not specified --.

System path *

Specify the existing path you wish to alias. For example: /node/28, /media/1, /taxonomy/term/1.


URL alias *

Specify an alternative path by which this data can be accessed. For example, type "/about" when writing an about page.


Save

Footer Bottom Place block			
EU Cookie Compliance Button Block	EU Cookie Compliance	Footer Bottom	Configure
Powered by Drupal	System	Footer Bottom	Configure

La navigation privée :



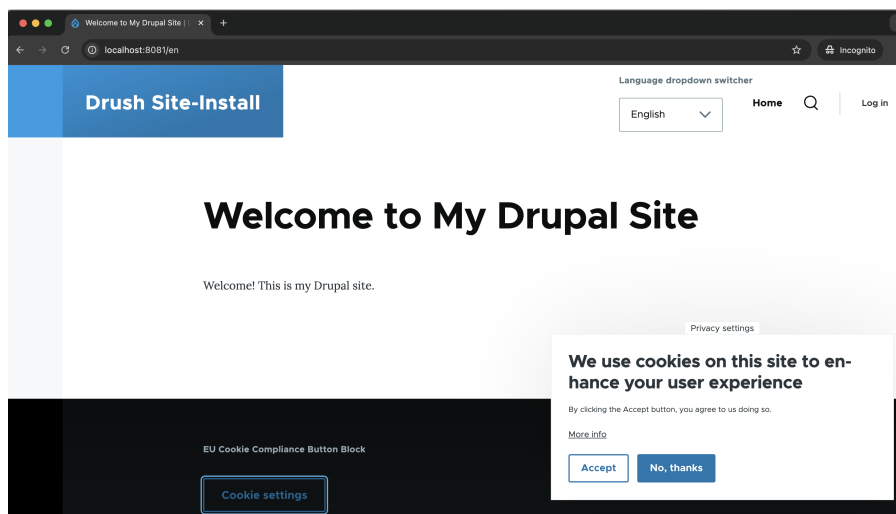


problème :

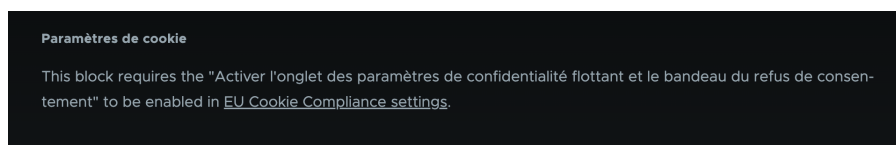

solution :


Source string	Translation for French
This block requires the "@withdraw_enabled_setting_name" to be enabled in EU Cookie Compliance settings. *	Ce bloc nécessite que « @withdraw_enabled_setting_name » soit activé dans les paramètres EU Cookie Compliance.

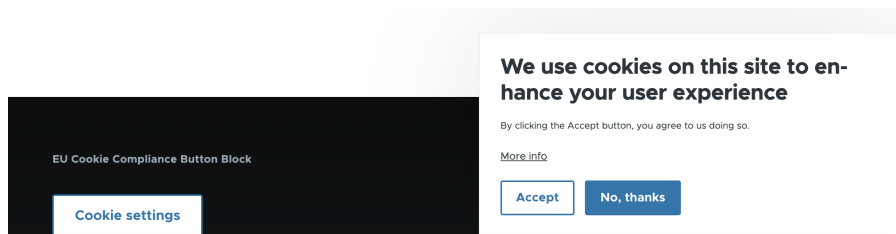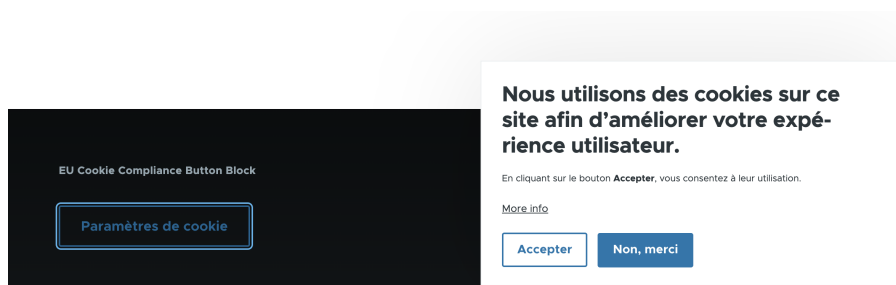

Captcha :

composer require 'drupal/recaptcha:~3.4'

protéger les formulaires (login, register...) contre les robots.

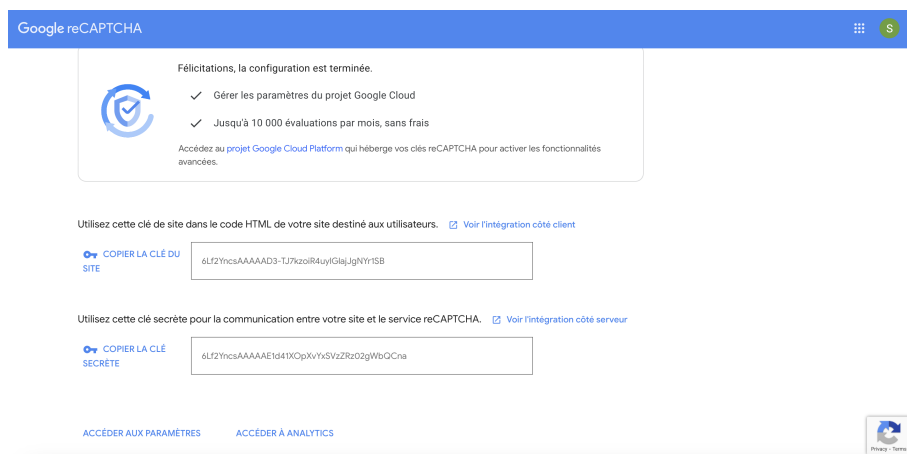

Google reCAPTCHA

Félicitations, la configuration est terminée.

- ✓ Gérer les paramètres du projet Google Cloud
- ✓ Jusqu'à 10 000 évaluations par mois, sans frais

Accédez au [projet Google Cloud Platform](#) qui héberge vos clés reCAPTCHA pour activer les fonctionnalités avancées.

Utilisez cette clé de site dans le code HTML de votre site destiné aux utilisateurs. [Voir l'intégration côté client](#)


[COPIER LA CLÉ DU SITE](#) 6Lf2YncsAAAAAD3-TJ7kzoIR4uyfGlaJgNYr1SB

Utilisez cette clé secrète pour la communication entre votre site et le service reCAPTCHA. [Voir l'intégration côté serveur](#)

[COPIER LA CLÉ SECRÈTE](#) 6Lf2YncsAAAAAE1d41XOpXvYvSVzRz02gWbQCna

[ACCÉDER AUX PARAMÈTRES](#) [ACCÉDER À ANALYTICS](#)

[Privacy - Terms](#)

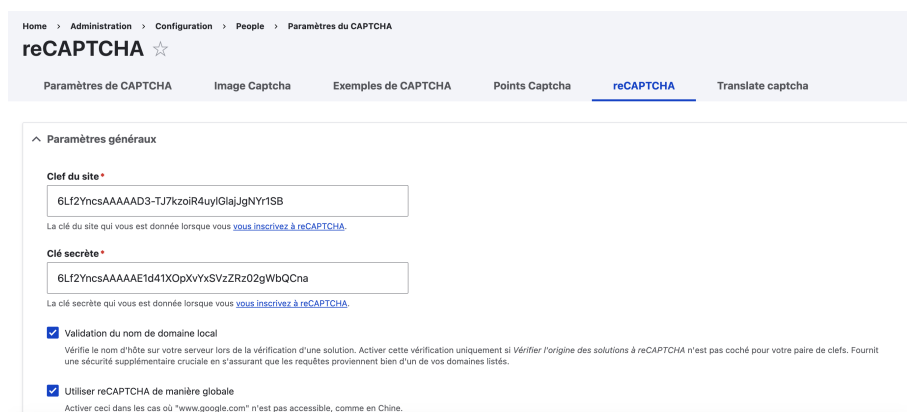

Home > Administration > Configuration > People > Paramètres du CAPTCHA

reCAPTCHA ☆

Paramètres de CAPTCHA Image Captcha Exemples de CAPTCHA Points Captcha **reCAPTCHA** Translate captcha

Paramètres généraux

Clef du site *

6Lf2YncsAAAAAD3-TJ7kzoIR4uyfGlaJgNYr1SB

La clé du site qui vous est donnée lorsque vous [vous inscrivez à reCAPTCHA](#).

Clé secrète *

6Lf2YncsAAAAAE1d41XOpXvYvSVzRz02gWbQCna


La clé secrète qui vous est donnée lorsque vous [vous inscrivez à reCAPTCHA](#).

☒ Validation du nom de domaine local

Vérifie le nom d'hôte sur votre serveur lors de la vérification d'une solution. Activer cette vérification uniquement si [Vérifier l'origine des solutions à reCAPTCHA](#) n'est pas coché pour votre paire de clés. Fournit une sécurité supplémentaire cruciale en s'assurant que les requêtes proviennent bien d'un de vos domaines listés.

☒ Utiliser reCAPTCHA de manière globale

Activer ceci dans les cas où "www.google.com" n'est pas accessible, comme en Chine.

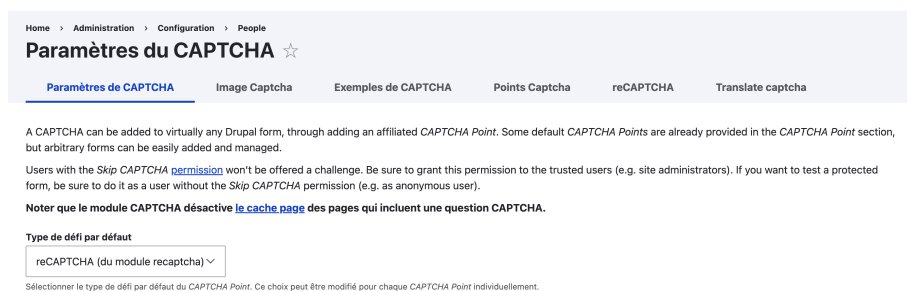

Home > Administration > Configuration > People

Paramètres du CAPTCHA ☆

Paramètres de CAPTCHA Image Captcha Exemples de CAPTCHA Points Captcha reCAPTCHA Translate captcha

A CAPTCHA can be added to virtually any Drupal form, through adding an affiliated *CAPTCHA Point*. Some default *CAPTCHA Points* are already provided in the *CAPTCHA Point* section, but arbitrary forms can be easily added and managed.


Users with the [Skip CAPTCHA permission](#) won't be offered a challenge. Be sure to grant this permission to the trusted users (e.g. site administrators). If you want to test a protected form, be sure to do it as a user without the *Skip CAPTCHA* permission (e.g. as anonymous user).

Noter que le module CAPTCHA désactive le [cache page](#) des pages qui incluent une question CAPTCHA.

Type de défi par défaut

reCAPTCHA (du module recaptcha) ▼

Sélectionner le type de défi par défaut du CAPTCHA Point. Ce choix peut être modifié pour chaque CAPTCHA Point individuellement.

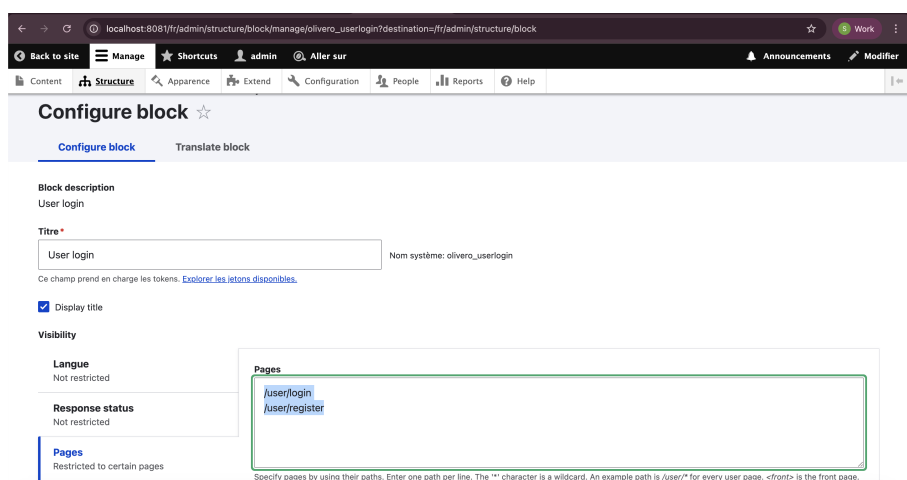

localhost:8081/fr/admin/structure/block/manage/olivero_userlogin/destinations/fr/admin/structure/block

Back to site Manage Shortcuts admin Aller sur Announcements Modifier

Content Structure Appearance Extend Configuration People Reports Help

Configure block Translate block

Block description

User login

Titre *

User login Nom système: olivero_userlogin

Ce champ prend en charge les tokens. [Explorer les jetons disponibles.](#)

☒ Display title

Visibilité

Langue

Not restricted

Response status

Not restricted

Pages

Restricted to certain pages

Pages

/user/login
/user/register

Specify pages by using their paths. Enter one path per line. The "*" character is a wildcard. An example path is /user/* for every user page. <front> is the front page.

captcha points :

Identifiant (ID) de formulaire du point captcha	Type de challenge du point captcha	État	Operations
contact_message_personal_form	default	Désactivé	Activer
node_article_form	default	Désactivé	Activer
node_page_form	default	Désactivé	Activer
user_login_form	default	Activé	Modifier
user_pass	default	Désactivé	Activer
user_register_form	default	Activé	Modifier

Log in

Username *

Password *

CAPTCHA

☐ Je ne suis pas un robot 
Confidentialité - Conditions

Cette question sert à vérifier si vous êtes un visiteur humain ou non afin d'éviter les soumissions de pourriel (spam) automatisées.

Log in

Email Registration : i went with login_emailusername cause the email_registration is depracated for drupal v11


```
composer require drupal/login_emailusername
```

```
drush pm:enable login_emailusername
```

```
drush cache:rebuild
```

so now we can login with both email or username . Register :

```
composer require drupal/social_auth drupal/social_auth_google
```

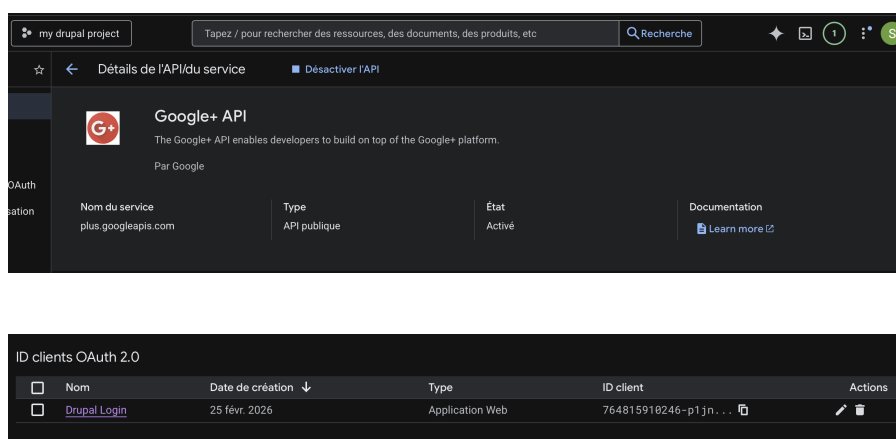


Coffee :

Problème : X-Frame-Options header

There are some headers a site should set. One such header is X-Frame-Options with a value that will protect the site against clickjacking.

Solution :Le module Seckit :


conect to tag google : using a website

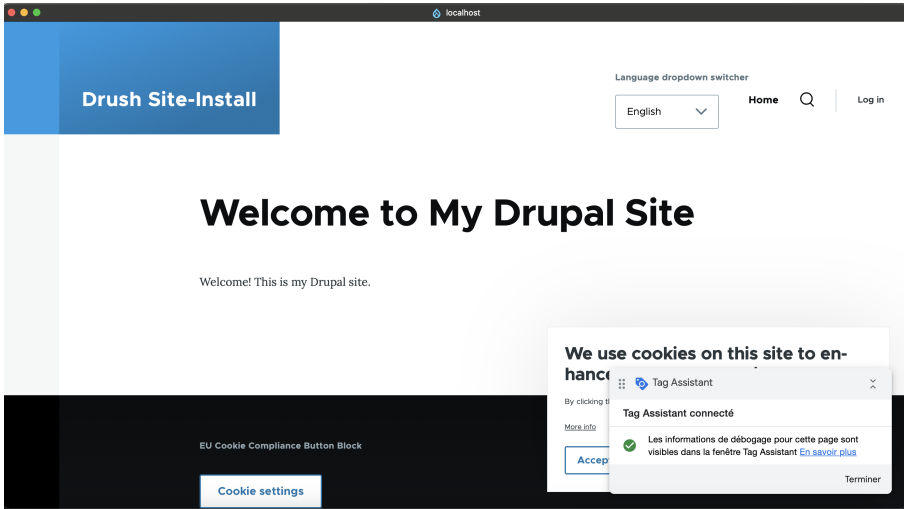

Emails :

```
docker run --rm --name mailhog -p 8025:8025 -p 1025:1025 mailhog/mailhog
```


add new smtp transport

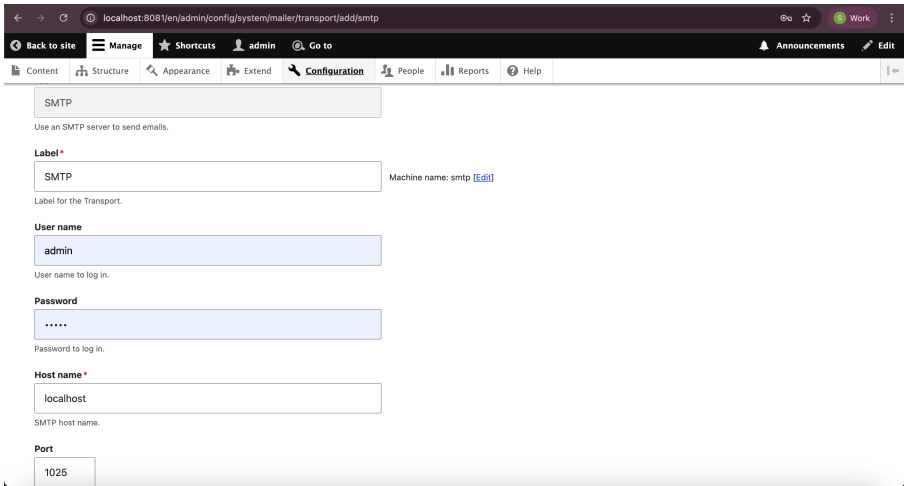


we set it as default :

Type	Label	Operations
Sendmail	Sendmail	Edit ▼
SMTP	SMTP Default	Edit ▼


we test the email dans mailhog on recoit bien :

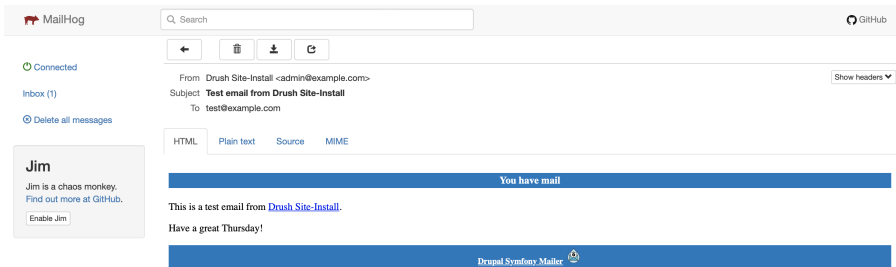


registering a new user will sent an email automatically to the admin and the user as well :

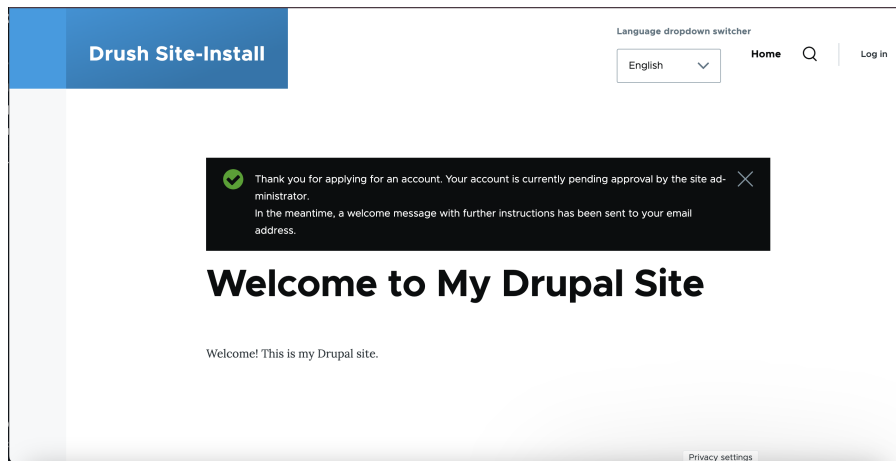


Drush Site-Install admin@example.com	Account details for salma at Drush Site-Install (pending admin approval)	a minute ago	1.19 kB
Drush Site-Install salma@example.com	Account details for salma at Drush Site-Install (pending admin approval)	a minute ago	1.61 kB

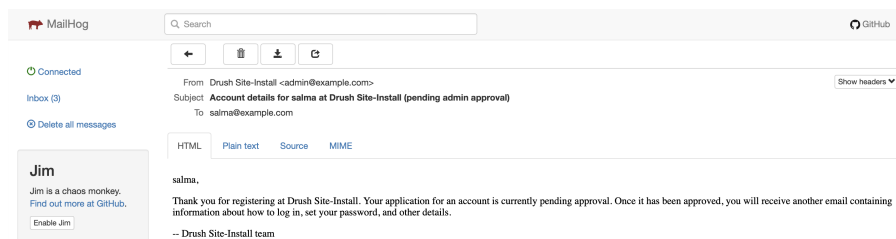


problem : html not being parsed :

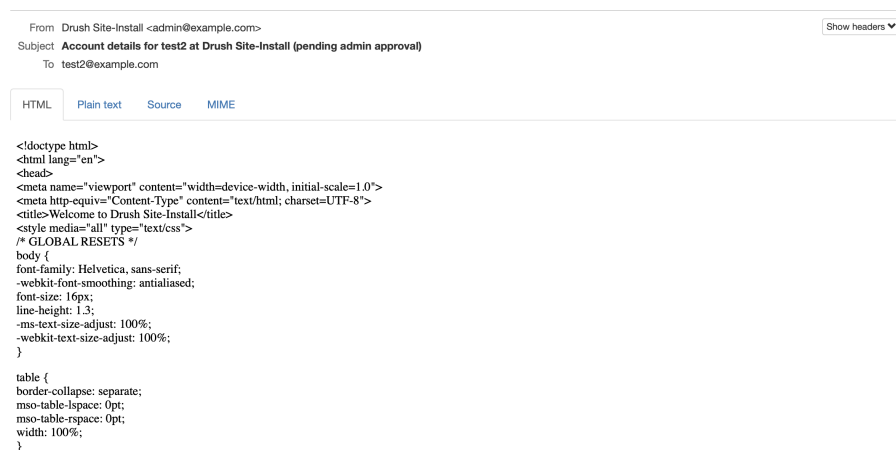

solution : u should just enable the user overriding Resultat :

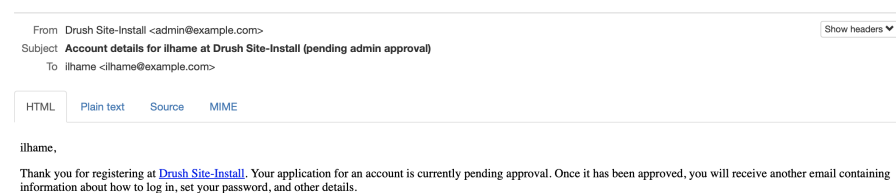

The CSS isn't showing because MailHog (and most email clients) strip out <style> tags in the <head>.

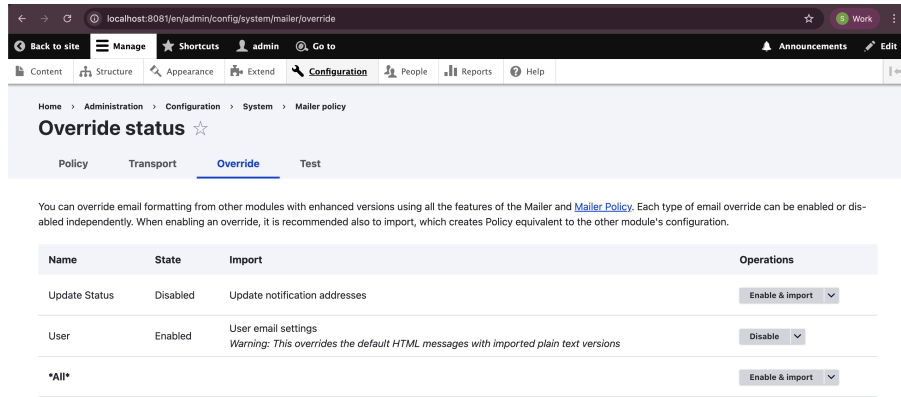

[H]


SEO :

we add the meta tags

composer require 'drupal/metatag:^2.2'

drush en metatag

adding open graph :

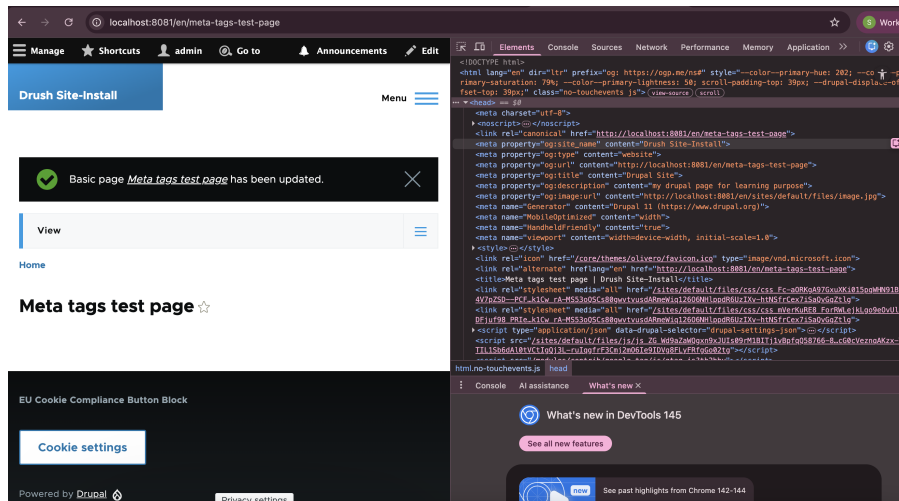

```
<meta property="og:site_name" content="Drush Site-Install"> == $0
<meta property="og:type" content="website">
<meta property="og:url" content="http://localhost:8081/en/meta-tags-test-page">
<meta property="og:title" content="Drupal Site">
<meta property="og:description" content="my drupal page for learning purpose">
<meta property="og:image:url" content="http://localhost:8081/en/sites/default/files/image.jpg">
```

Alias : we can change the alias form here :

^


URL alias

Alias: /hello-world

URL alias

/hello-world

Specify an alternative path by which this data can be accessed. For example, type "/about" when writing an about page.

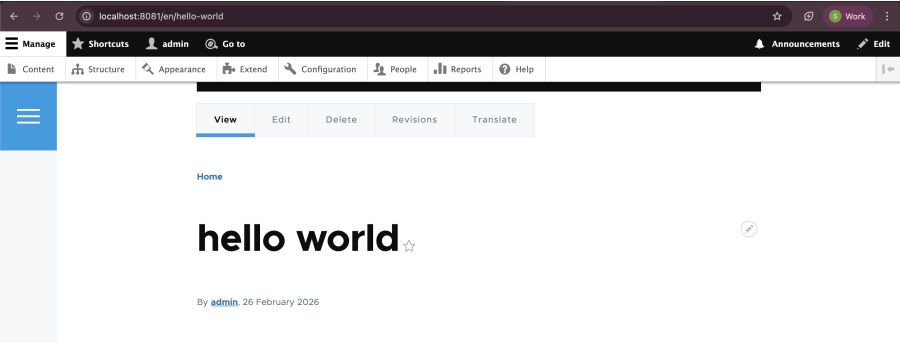

we can generate url automatically using
composer require 'drupal/pathauto:~1.14'
drush en pathauto
we add patterns to our new page and articles

This page provides a list of all patterns on the site and allows you to edit and reorder them.

[+ Add Pathauto pattern](#)

Label	Pattern	Pattern type	Conditions	Operations
Articles	/articles/[node:title]	Content	• Content type is article	Duplicate
Basic Page	/[node:title]	Content	• Content type is page	Duplicate

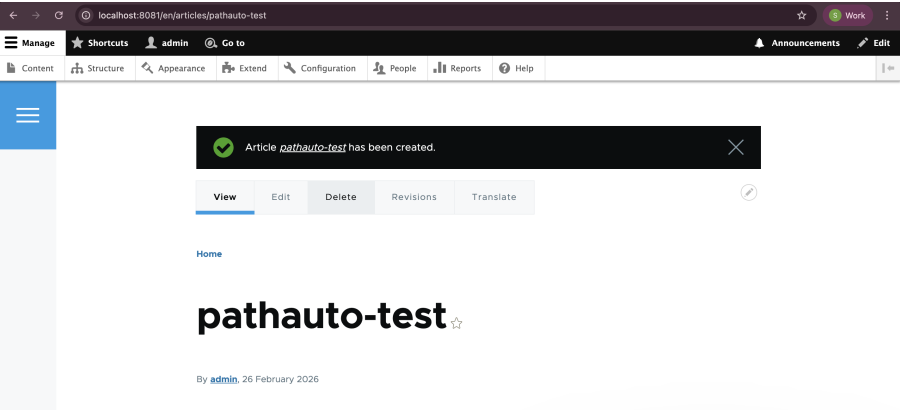


FIGURE 2 – Enter Caption


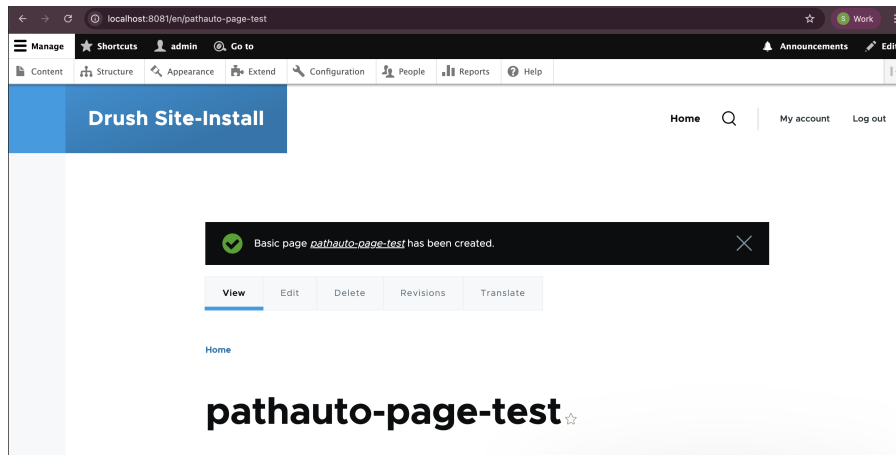


FIGURE 3 – Enter Caption

probleme : the canonical is (/node/1 are still available, and if you check the HTML source code for canonical it has /en. That's said, having the canonical meta tag is great, but when dealing with Search Engines such as Google, they generally don't like multiple URLs pointing to the same content)

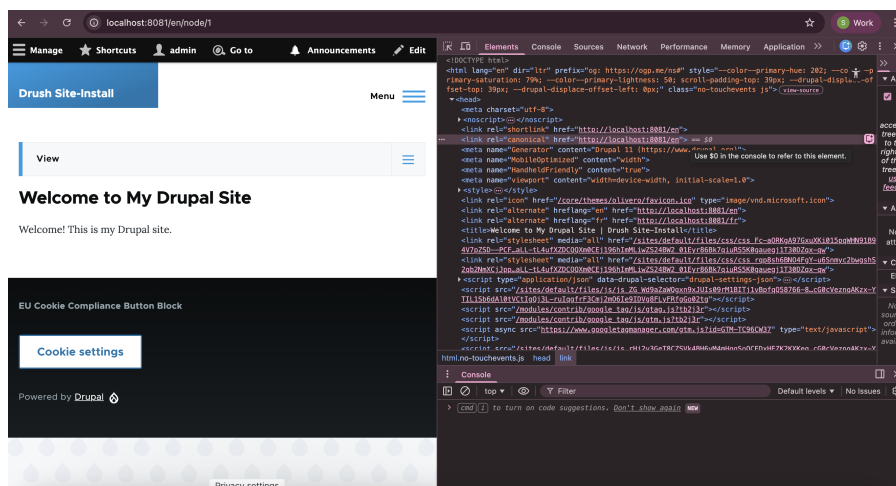

solution : une redirection vers

`composer require 'drupal/redirect:^1.12'`

grace à :



Problème des Redirections d'URL Enjeu : Quand l'URL d'une page change (par ex. de /ancienne-page à /nouvelle-page), les visiteurs qui accèdent à l'ancienne URL reçoivent une erreur 404 et quittent le site.

Impact :

Visiteurs perdus Liens cassés dans les résultats de recherche Classement SEO réduit

Solution : Mettre en place des redirections pour envoyer automatiquement les utilisateurs des anciennes URLs vers les nouvelles URLs. Implémentation :

Manuel : Ajouter les redirections une par une à /admin/config/search/redirect/add En masse : Utiliser le module path_redirect_import pour télécharger un fichier CSV avec plusieurs redirections à la fois

`composer require drupal/path_redirect_import`

`drush pm:enable path_redirect_import -y`

Home > Administration > Configuration > Search and metadata > Redirect

URL Redirects Settings **Migrate** Export

Please upload a CSV file following this pattern to migrate the redirect data:

Source	Destination	Language	Status Code
source-path	<front>	und	301
source-path-other?param=value	my-path	en	302
my-source-path	https://example.com	und	302

CSV File

No file chosen

The CSV containing the redirect data in the expected format

☐ Delete redirects defined in the spreadsheet
This action can be undone

Cron jobs :

```
composer require 'drupal/ultimate_cron:^2.0@beta'
```

Content Structure Appearance Extend Configuration People Reports Help

Submission form settings
Title

Publishing options
Published, Promoted to front page, Create new revision

Language settings
Site's default language (English), Show language selector on create and edit pages, Enable translation

Display settings
Display author and date information

Menu settings

Simple XML Sitemap
Excluded from all sitemaps

Scheduler
Publishing enabled
Unpublishing enabled

Publishing


- ☒ Enable scheduled publishing for article content items
- ☐ Change article creation time to match the scheduled publish time
- ☐ Require scheduled publishing
- ☐ Create a new revision on publishing

Advanced options

Unpublishing

- ☒ Enable scheduled unpublishing for article content items
- ☐ Require scheduled unpublishing
- ☐ Create a new revision on unpublishing

published in 5 min as admin : in a private page :

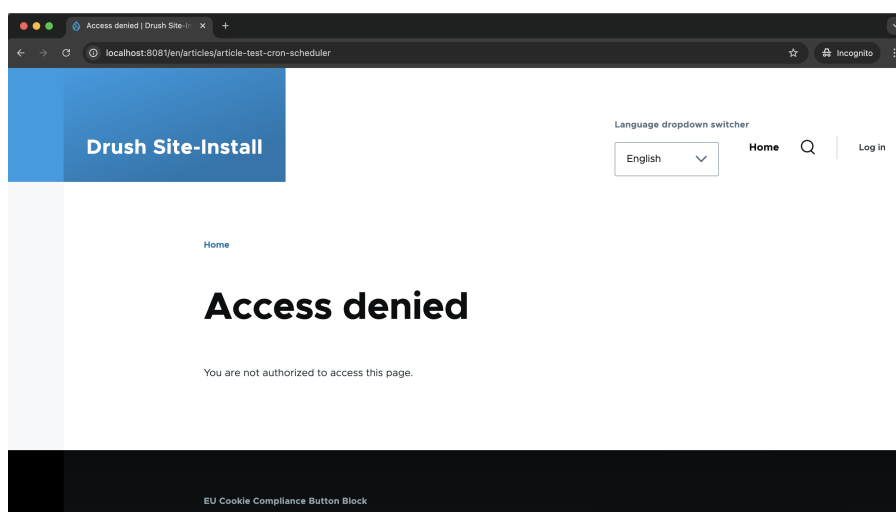

and now by running :

```
drush --root=/var/www/html scheduler:cron
```

Scheduling options

Scheduled for publishing

Publish on

26/02/2026



14:32:17



Enter a date and time. Leave the date blank for no scheduled publishing.

Unpublish on


dd/mm/yyyy





--:--:--





Enter a date and time. Leave the date blank for no scheduled unpublishing.


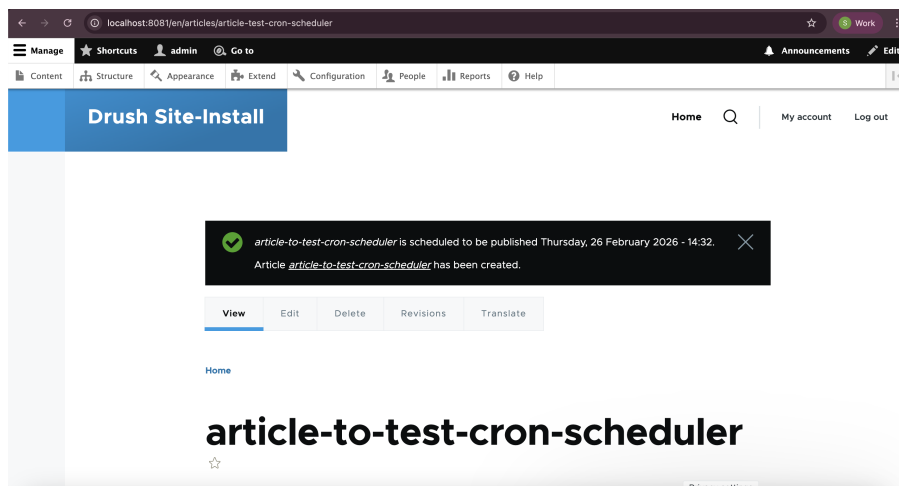


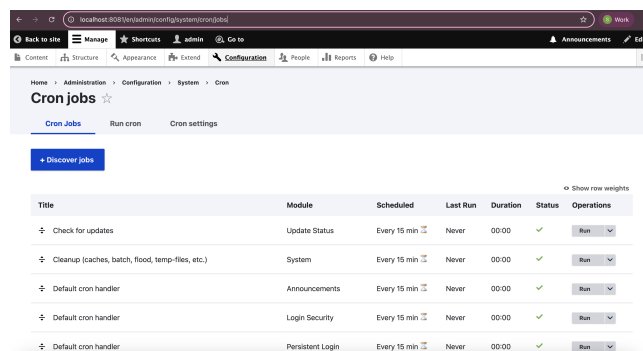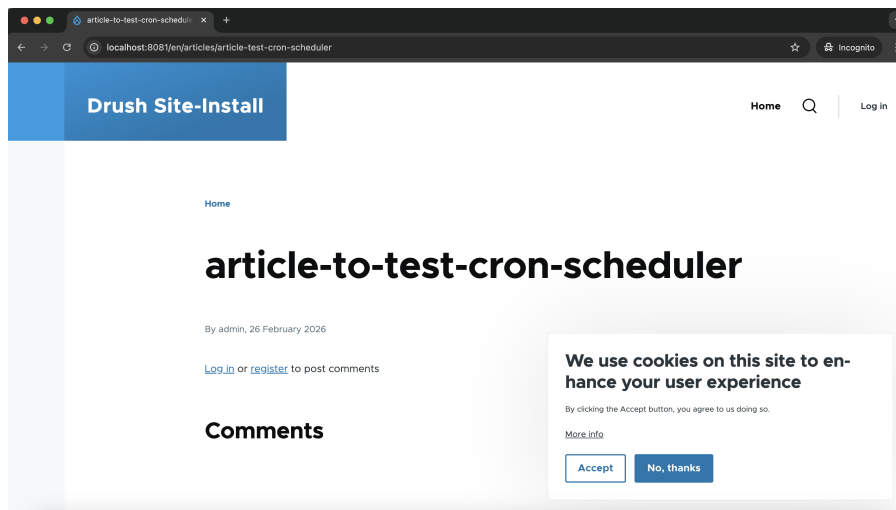

Content types :

Adding categories and thematiques vocabs

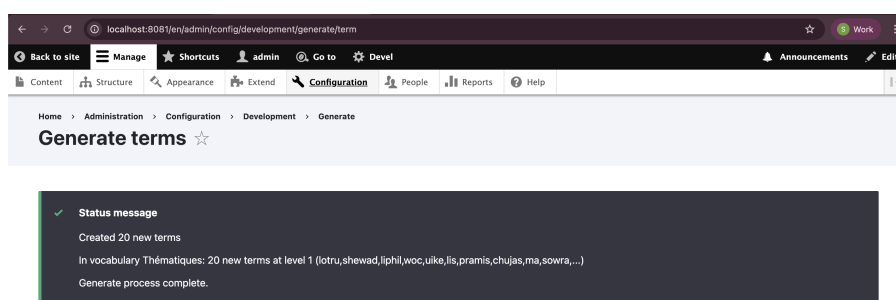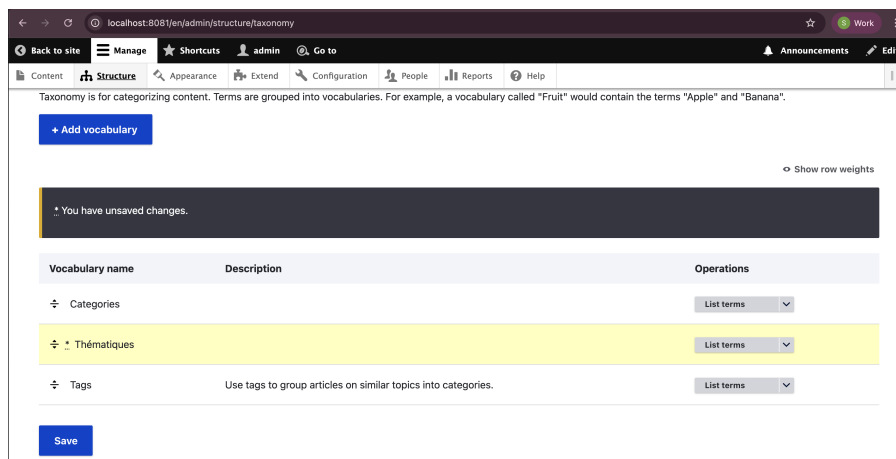


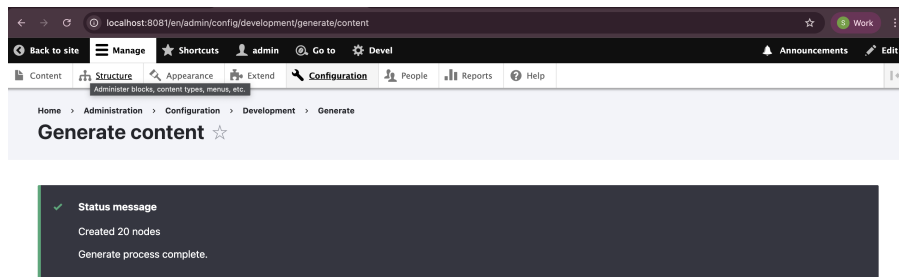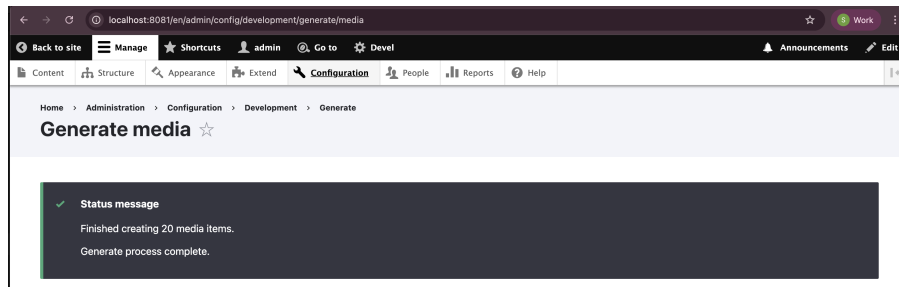

@ConfigEntityType vs @ContentEntityType? CONFIGURATION ENTITIES ————— node_type (News) taxonomy_vocabulary (Categories) field_storage_config (Image) field_config (Attach Image)
 ↓ defines
 CONTENT ENTITIES ————— node (News article) taxonomy_term (Sports) media (Image file)

Views - Listing :

we add in the config , but the layout is broken

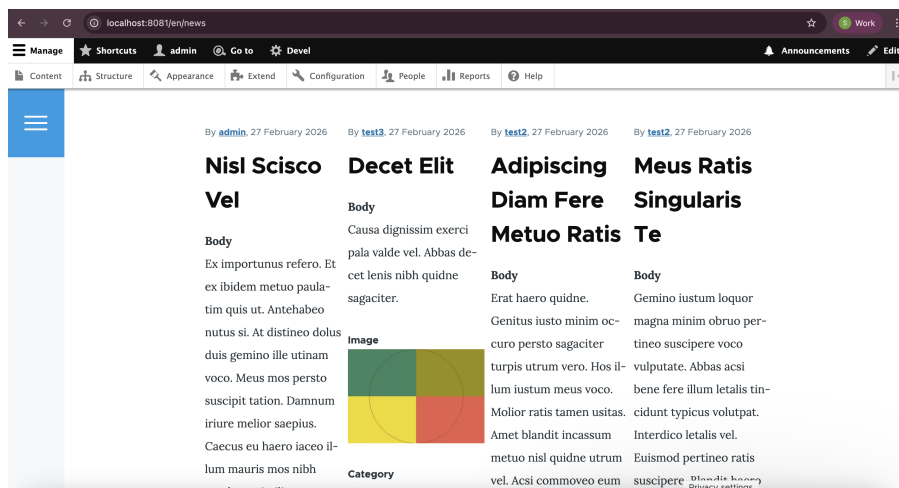

use : (to make it beautiful)

```
composer require 'drupal/asset_injector:^2.21'
drush en asset_injector
```

A teaser is a View Mode. Drupal has display modes that define how content is rendered depending on context.



Field	Machine name	Label	Format	
÷ Image	field_new_image	- Hidden -	Rendered entity	Rendered as Default
÷ Category	field_category	- Hidden -	Label	Link to the referenced entity
÷ Body	field_body	- Hidden -	Smart trimmed	20 characters
Disabled				
÷ Language	langcode	Above	Language	
÷ Meta Tags	field_meta_tags	Above	Empty formatter	
÷ Thématique	field_thematique	Above	RSS category	

Image styles :

localhost:8081/en/admin/config/media/image-styles/manage/news_teaser_image

Back to site Manage Shortcuts admin Go to Devel Announcements Edit

Content Structure Appearance Extend Configuration People Reports Help

Preview (Click for actual images)

Source image 600px 800px

Derivative image 600px 800px

Image style name*

News Teaser Image Machine name: news_teaser_image [Edit](#)

Effect Operations

÷ Scale and crop Add

Save Delete

localhost:8081/en/admin/config/media/image-styles/manage/news_teaser_image/add/image_scale_and_crop?weights=1

Back to site Manage Shortcuts admin Go to Devel Announcements Edit

Content Structure Appearance Extend Configuration People Reports Help

Scale and crop will maintain the aspect-ratio of the original image, then crop the larger dimension. This is most useful for creating perfectly square thumbnails without stretching the image.

Width*

294 pixels

Height*

165 pixels

Anchor

☐ ☐ ☐
☐ ☒ ☐
☐ ☐ ☐

The part of the image that will be retained during the crop.

Add effect Cancel

You have unsaved changes.

Displays

[Page](#)
[Related News \(VCC\)*](#)
[Related News \(VCC\)](#)
[Block 2](#)
[+ Add](#)

[Edit view name/description](#) ▼

Display name: [Related News \(VCC\)](#)
[Duplicate Related News \(VCC\)](#) ▼

Title
 Title: [News](#)

localhost:8081/en/admin/structure/types/manage/news/display/teaser

Back to site Manage Shortcuts admin Go to Devel Announcements Edit

Content Structure Appearance Extend Configuration People Reports Help

Show row weights

Field	Machine name	Label	Format
Image	field_new_image	- Hidden - ▼	Format settings: Thumbnail Image style: News Teaser Image Configure Image Styles Link image to: Nothing ▼ Image loading: ▼

Update Cancel

now the images have the same style :

**Esse Paratus
Sagaciter**



[sputru](#)

Aliquam pala populus

**Commovéo
Magna Neque Si**



[shu](#)

Autem defui exputo

**Illum Saepius
Sagaciter Similis**



[hiswi](#)

Antehabeo enim mos

Views - Blocks :

Fields	Add ▾
Content: Title	
Filter criteria	Add ▾
Content: Published (= Yes)	
Content: Content type (= News)	
Content: Translation language (exposed)	
Content: Category (exposed) Settings	
Content: Thématique (exposed) Settings	
Content: Title (exposed)	
Sort criteria	Add ▾
Content: Authored on (desc)	
Content: Authored on (Exposed)	

Block settings	
Block name: None	
Block category: Lists (Views)	
Allow settings: Items per page	
Access: Permission View published content	
Header	Add ▾
Global: Text area (Global: Text area)	
Footer	Add
No results behavior	Add ▾
Global: Text area (Global: Text area)	
Pager	
Use pager: Display a specified number of items / 3 items	
More link: No	
Link display: None	

Relationships

Add

[field_category: Taxonomy term](#)

Contextual filters

Add

[Content: ID \(Default: Content ID from URL\)](#)

[\(field_category: Taxonomy term\) Taxonomy term: Term ID \(Default: Content ID from URL\)](#)

Exposed form

Exposed form in block: [No](#)

Exposed Form: [Better Exposed Filters](#) | [Settings](#)

Other

Machine Name: [block_1](#)

Administrative comment: [None](#)

Use AJAX: [No](#)

Hide attachments in summary: [No](#)

Contextual links: [Shown](#)

Use aggregation: [No](#)

Search :

Home > Administration > Structure > Webforms

Newsletter Wizard

☆

1

2

3

4

Personal Information

Newsletter preferences

Confirmation

Complete

1 of 4

First name *

Privacy settings