

sportyshoes.com

Project Source Code

Version History:

Author:	Sarah yasmeen
Purpose:	Project Source Code and GITHUB
Date:	20 th December, 2021
Version:	1.0

Table of Content:


Project GITHUB Link:	3
Project Code:.....	4
Database Tables:	53

Project GITHUB Link:

Repository Name:	SportyShoesProject
Github Link:	https://github.com/sarahyas678/SportyShoes

Project Code:

Folder Structure

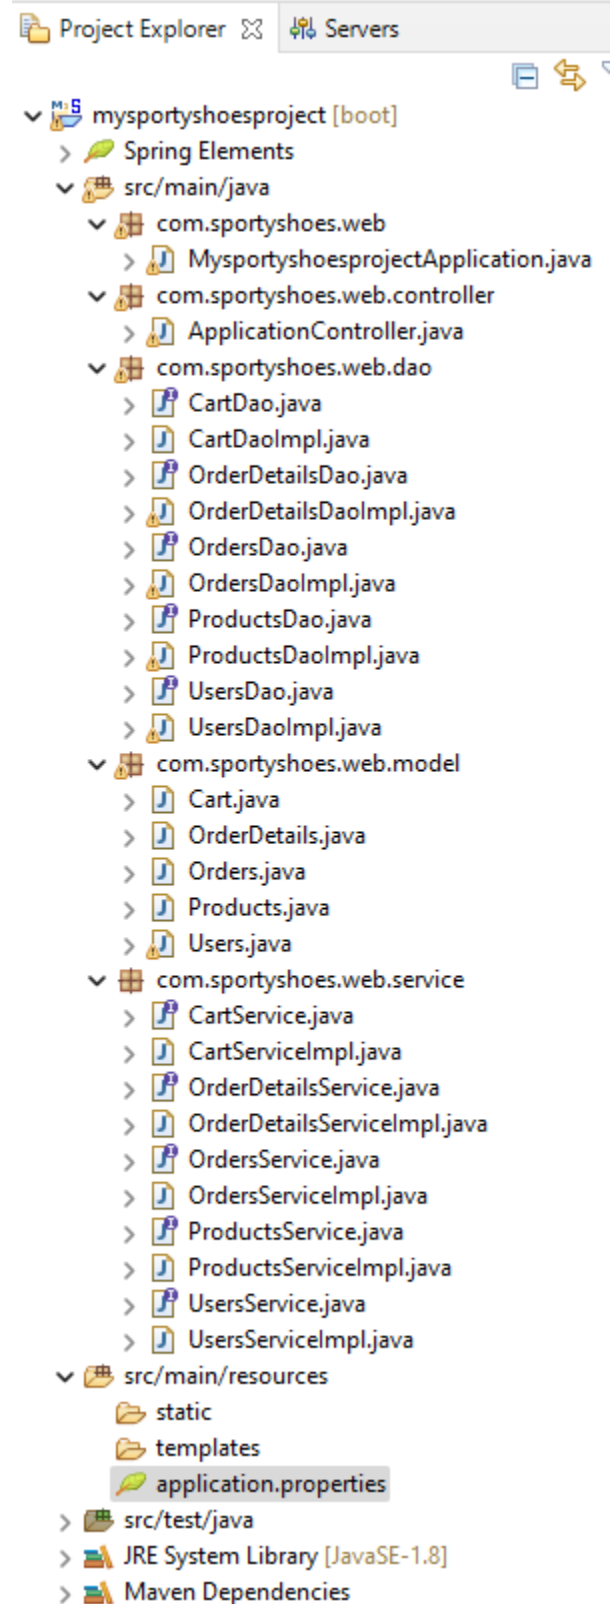

src
├── main
│ ├── java
│ ├── resources
│ └── webapp
│ └── views
│ ├── addproduct.jsp
│ ├── adduser.jsp
│ ├── adduserbyadmin.jsp
│ ├── adduserfail.jsp
│ ├── adminlogin.jsp
│ ├── adminpage.jsp
│ ├── editproduct.jsp
│ ├── edituser.jsp
│ ├── index.jsp
│ ├── invalidadmin.jsp
│ ├── invaliduser.jsp
│ ├── productslist.jsp
│ ├── purchasereport.jsp
│ ├── rparam.jsp
│ ├── usercart.jsp
│ ├── userlist.jsp
│ ├── userlogin.jsp
│ ├── userorderpage.jsp
│ └── userpage.jsp
├── test
└── target
 ├── HELP.md
 ├── mvnw
 ├── mvnw.cmd
 └── pom.xml

[MysportyshoesprojectApplication.java](#)

```
package com.sportyshoes.web;
```

```
import org.springframework.boot.SpringApplication;  
import org.springframework.boot.autoconfigure.SpringBootApplication;  
import org.springframework.context.annotation.ComponentScan;
```

```
@SpringBootApplication
```

```
public class MysportyshoesprojectApplication {
```

```
    public static void main(String[] args) {  
        SpringApplication.run(MysportyshoesprojectApplication.class, args);  
    }
```

```
}
```

[ApplicationController.java](#)

```
package com.sportyshoes.web.controller;
```

```
import java.text.ParseException;
import java.text.SimpleDateFormat;
import java.util.Date;
import java.util.List;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Controller;
import org.springframework.web.bind.annotation.ModelAttribute;
import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.RequestParam;
import org.springframework.web.servlet.ModelAndView;

import com.sportyshoes.web.model.Cart;
import com.sportyshoes.web.model.OrderDetails;
import com.sportyshoes.web.model.Products;
import com.sportyshoes.web.model.Users;
import com.sportyshoes.web.service.CartService;
import com.sportyshoes.web.service.OrderDetailsService;
import com.sportyshoes.web.service.OrdersService;
import com.sportyshoes.web.service.ProductsService;
import com.sportyshoes.web.service.UsersService;
```

@Controller

```
public class ApplicationController {
```

```
    @Autowired
```

```
    private ProductsService productsService;
```

```
    @Autowired
```

```
    private UsersService userService;
```

```
    @Autowired
```

```
    private CartService cartService;
```

```
    @Autowired
```

```
    private OrdersService ordersService;
```

```
    @Autowired
```

```
    private OrderDetailsService orderDetailsService;
```

```
    @RequestMapping("/index")
```

```
    public ModelAndView getAllProducts() {
```

```
        List<Products> allProducts = productsService.getAllProducts();
```

```
        ModelAndView modelAndView = new ModelAndView("index");
```

```
        modelAndView.addObject("products", allProducts);
```

```
        return modelAndView;
```

```
    }
```

```
    @RequestMapping("/adminlogin")
```

```

public String getAdminLoginPage() {
    return "adminlogin";
}

@RequestMapping("/userlogin")
public String getUserLoginPage() {
    return "userlogin";
}

@RequestMapping("signUpUser")
public ModelAndView signUpUser(@ModelAttribute("user") Users user) {
    boolean isUserAdded = userService.addUser(user);
    List<Products> allProducts = productService.getAllProducts();
    ModelAndView modelAndView = new ModelAndView("index");
    modelAndView.addObject("products", allProducts);
    return modelAndView;
}

@RequestMapping("/addNewUser")
public String addUser(@ModelAttribute("user") Users user) {
    boolean isUserAdded = userService.addUser(user);
    return "adminpage";
}

@RequestMapping("/validateUser")
public ModelAndView validateUser(@RequestParam("username") String lid,
@RequestMapping("userpassword") String up) {
    if(lid.equals("admin")) {
        ModelAndView modelAndView = new ModelAndView("invaliduser");
        return modelAndView;
    } else {
        boolean result = userService.validateUser(lid,up);
        if(result) {
            List<Products> allProducts = productService.getAllProducts();
            ModelAndView modelAndView = new
ModelAndView("userpage");
            modelAndView.addObject("products", allProducts);
            modelAndView.addObject("username", lid);
            return modelAndView;
        } else {
            ModelAndView modelAndView = new
ModelAndView("invaliduser");
            return modelAndView;
        }
    }
}

@RequestMapping("/validateAdmin")
public String validateAdmin(@RequestParam("username") String lid,
@RequestMapping("userpassword") String up) {

```

```

        if(lid.equals("admin")) {
            boolean result = userService.validateUser(lid,up);
            if(result) {
                return "adminpage";
            }else {
                return "invalidadmin";
            }
        }else {
            return "invalidadmin";
        }
    }

    @RequestMapping("/adminpage")
    public String getAdminPage() {
        return "adminpage";
    }

    @RequestMapping("/listusers")
    public ModelAndView getUsersList() {
        List<Users> allUsers = userService.getAllUsers();
        ModelAndView MVallUsers = new ModelAndView("userlist");
        MVallUsers.addObject("Users",allUsers);
        return MVallUsers;
    }

    @RequestMapping("/edituser")
    public ModelAndView editUser(@RequestParam("lid") String lid) {
        Users euser = userService.getUser(lid);
        ModelAndView euMAV = new ModelAndView("edituser");
        euMAV.addObject("euser",euser);
        return euMAV;
    }

    @RequestMapping("/productslist")
    public ModelAndView getProductList() {
        List<Products> allProducts = productService.getAllProducts();
        ModelAndView modelAndView = new ModelAndView("productslist");
        modelAndView.addObject("products", allProducts);
        return modelAndView;
    }

    @RequestMapping("/editproduct")
    public ModelAndView editProduct(@RequestParam("pid") int pid) {
        Products eproduct = productService.getProduct(pid);
        ModelAndView epMAV = new ModelAndView("editproduct");
        epMAV.addObject("epproduct",eproduct);
        return epMAV;
    }

    @RequestMapping("/updateUser")
    public String updateUser(@RequestParam("uloginid") String uloginid,

```



```

@RequestParam("upassword") String upassword, @RequestParam("uemail") String uemail,
@RequestParam("uphone") String uphone) {
    boolean isUserUpdated = userService.updateUser(uloginid, upassword,
uemail, uphone);
    return "adminpage";
}

@RequestMapping("/updateProduct")
public String updateProduct(@RequestParam("uid") int
id, @RequestParam("ubrandname") String brandname, @RequestParam("ugender") String
gender, @RequestParam("usize") int size, @RequestParam("uprice") int price) {
    boolean isProductUpdated = productsService.updateProduct(id, brandname,
gender, size, price);
    return "adminpage";
}

@RequestMapping("/adduser")
public String addUserPage() {
    return "adduser";
}

@RequestMapping("/adduserbyadmin")
public String addUserAdminPage() {
    return "adduserbyadmin";
}

@RequestMapping("/addproduct")
public String getaddProductPage() {
    return "addproduct";
}

@RequestMapping("/addNewProduct")
public String addProduct(@ModelAttribute("product") Products product) {
    boolean isProductAdded = productsService.addProduct(product);
    return "adminpage";
}

@RequestMapping("/addToCart")
public ModelAndView addItemToCart(@RequestParam("pid") int pid,
@RequestParam("lid") String lid, @RequestParam("pr") int pr, @RequestParam("bn") String
bn, @RequestParam("gd") String gd, @RequestParam("sz") int sz) {
    boolean isItemAdded = cartService.addItemToCart(pid, lid, pr, bn, gd, sz);
    List<Products> allProducts = productsService.getAllProducts();
    ModelAndView modelAndView = new ModelAndView("userpage");
    modelAndView.addObject("products", allProducts);
    modelAndView.addObject("username", lid);
    return modelAndView;
}

@RequestMapping("/viewcart")

```

```

public ModelAndView getUserCart(@RequestParam("lid") String lid) {
    List<Cart> userCart = cartService.getUserCartItems(lid);
    int carttotal = cartService.getUserCartTotal(lid);
    ModelAndView modelAndView = new ModelAndView("usercart");
    modelAndView.addObject("cart", userCart);
    modelAndView.addObject("username", lid);
    modelAndView.addObject("carttotal", carttotal);
    return modelAndView;
}

@RequestMapping("/userPage")
public ModelAndView userPage(@RequestParam("username") String lid) {
    List<Products> allProducts = productService.getAllProducts();
    ModelAndView modelAndView = new ModelAndView("userpage");
    modelAndView.addObject("products", allProducts);
    modelAndView.addObject("username", lid);
    return modelAndView;
}

@RequestMapping("/placeOrder")
public ModelAndView placeOrder(@RequestParam("lid") String lid) {
    int orderid = ordersService.placeOrder(lid);
    int ordertotal = ordersService.getUserOrderTotal(orderid);
    List<OrderDetails> userOrderDetails =
orderDetailsService.getUserOrderDetails(orderid);
    ModelAndView modelAndView = new ModelAndView("userorderpage");
    modelAndView.addObject("orderdetail", userOrderDetails);
    modelAndView.addObject("username", lid);
    modelAndView.addObject("orderid", orderid);
    modelAndView.addObject("ordertotal", ordertotal);
    return modelAndView;
}

@RequestMapping("/reportparam")
public String getReportParam() {
    return "rparam";
}

@RequestMapping("/callReport")
public ModelAndView getCallReport(@RequestParam("rbrand") String
rbrand, @RequestParam("rdate") String rdate) {
    SimpleDateFormat sdf = new SimpleDateFormat("yyyy-MM-dd");
    List<OrderDetails> purchasedetails;
    ModelAndView mAVpurchase = new ModelAndView("purchasereport");
    try {
        purchasedetails = orderDetailsService.getPurchaseReport(rbrand,
sdf.parse(rdate));
        mAVpurchase.addObject("purchasedetails", purchasedetails);
    } catch (ParseException e) {
        // TODO Auto-generated catch block
        e.printStackTrace();
    }
}

```

```

    }
    return mAVpurchase;
}
}

```

CartDao.java

```

package com.sportyshoes.web.dao;

import java.util.List;

import com.sportyshoes.web.model.Cart;

public interface CartDao {
    public List<Cart> getAllCartItems();
    public boolean addItemToCart(int pid, String lid, int pr, String bn, String gd, int sz);
    public List<Cart> getUserCartItems(String lid);
    public int getUserCartTotal(String lid);
}

```

CartDaoImpl.java

```

package com.sportyshoes.web.dao;

import java.util.ArrayList;
import java.util.List;
import java.util.Map;

import javax.annotation.PostConstruct;
import javax.sql.DataSource;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.jdbc.core.support.JdbcDaoSupport;
import org.springframework.stereotype.Repository;

import com.sportyshoes.web.model.Cart;

@Repository
public class CartDaoImpl extends JdbcDaoSupport implements CartDao {

    @Autowired
    DataSource dataSource;

    @PostConstruct
    private void initialize() {
        setDataSource(dataSource);
    }

    @Override
    public List<Cart> getAllCartItems() {
        List<Cart> allcarts = new ArrayList<Cart>();
        String sql = "select * from usercart";
        List<Map<String, Object>> allcartsData = getJdbcTemplate().queryForList(sql);
        for(Map<String, Object> cart : allcartsData) {

```

```

        Cart cartitem = new Cart();
        cartitem.setld((Integer)cart.get("id"));
        cartitem.setProductid((Integer)cart.get("productid"));
        cartitem.setLoginid((String)cart.get("loginid"));
        cartitem.setPrice((Integer)cart.get("price"));
        cartitem.setBrandname((String)cart.get("brandname"));
        cartitem.setGender((String)cart.get("gender"));
        cartitem.setSize((Integer)cart.get("size"));
        allcards.add(cartitem);
    }
    return allcards;
}

@Override
public boolean addItemToCart(int pid, String lid, int pr, String bn, String gd, int sz) {
    boolean flag = false;
    List<Cart> getallcartitems = getAllCartItems();
    int i = 1;
    for(Cart countcartitem : getallcartitems) {
        int cartid = countcartitem.getld();
        if(cartid>=i) {
            i=cartid;
            i++;
        }
    }
    String sql = "insert into usercart values(?,?,?,?,?,?)";
    int val =getJdbcTemplate().update(sql, new Object[] {i, pid, lid, pr, bn, gd, sz});
    if(val>0)
        flag = true;
    return flag;
}

@Override
public List<Cart> getUserCartItems(String lid) {
    List<Cart> usercartitems = new ArrayList<Cart>();
    String sql = "select * from usercart where loginid = ?";
    List<Map<String, Object>> usercartData =
getJdbcTemplate().queryForList(sql,lid);
    for(Map<String, Object> cart : usercartData) {
        //System.out.println(cart.get("id"));
        Cart cartitem = new Cart();
        cartitem.setld((Integer)cart.get("id"));
        cartitem.setProductid((Integer)cart.get("productid"));
        cartitem.setLoginid((String)cart.get("loginid"));
        cartitem.setBrandname((String)cart.get("brandname"));
        cartitem.setGender((String)cart.get("gender"));
        cartitem.setSize((Integer)cart.get("size"));
        cartitem.setPrice((Integer)cart.get("price"));
        usercartitems.add(cartitem);
    }
}

```

```

        return usercartitems;
    }

    @Override
    public int getUserCartTotal(String lid) {
        String sql = "select * from usercart where loginid = ?";
        List<Map<String, Object>> usercartData =
getJdbcTemplate().queryForList(sql,lid);
        int usercarttotal = 0;
        for(Map<String, Object> cart : usercartData) {
            usercarttotal = usercarttotal +(Integer)cart.get("price");
        }
        return usercarttotal;
    }
}

```

OrderDetailsDao.java

```

package com.sportyshoes.web.dao;

import java.util.Date;
import java.util.List;

import com.sportyshoes.web.model.OrderDetails;

public interface OrderDetailsDao {
    public List<OrderDetails> getAllOrderDetails();
    public List<OrderDetails> getUserOrderDetails(int ordid);
    public List<OrderDetails> getPurchaseReport(String rbrand, Date rdate);
}

```

OrderDetailsDaoImpl.java

```
package com.sportyshoes.web.dao;

import java.text.SimpleDateFormat;
import java.util.ArrayList;
import java.util.Date;
import java.util.List;
import java.util.Map;

import javax.annotation.PostConstruct;
import javax.sql.DataSource;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.jdbc.core.support.JdbcDaoSupport;
import org.springframework.stereotype.Repository;

import com.sportyshoes.web.model.OrderDetails;

@Repository
public class OrderDetailsDaoImpl extends JdbcDaoSupport implements OrderDetailsDao {

    @Autowired
    DataSource dataSource;

    @PostConstruct
    private void initialize() {
        setDataSource(dataSource);
    }

    @Override
    public List<OrderDetails> getAllOrderDetails() {
        List<OrderDetails> allOrderDetails = new ArrayList<OrderDetails>();
        String sql = "SELECT * FROM orderdetails";
        List<Map<String, Object>> allOrderDetailsData =
getJdbcTemplate().queryForList(sql);
        for(Map<String, Object> orderdetails : allOrderDetailsData) {
            OrderDetails ordDtl = new OrderDetails();
            ordDtl.setId((Integer)orderdetails.get("id"));
            ordDtl.setLoginid((String)orderdetails.get("loginid"));
            ordDtl.setCiid((Integer)orderdetails.get("ciid"));
            ordDtl.setOrderid((Integer)orderdetails.get("orderid"));
            ordDtl.setProductid((Integer)orderdetails.get("productid"));
            ordDtl.setBrandname((String)orderdetails.get("brandname"));
            ordDtl.setGender((String)orderdetails.get("gender"));
        }
    }
}
```

```

        ordDtl.setSize((Integer)orderdetails.get("size"));
        ordDtl.setPrice((Integer)orderdetails.get("price"));
        ordDtl.setOrderdate((Date)orderdetails.get("orderdate"));
        allOrderDetails.add(ordDtl);
    }
    return allOrderDetails;
}

@Override
public List<OrderDetails> getUserOrderDetails(int ordid) {
    List<OrderDetails> userOrderDetails = new ArrayList<OrderDetails>();
    String sql = "SELECT * FROM orderdetails where orderid=?";
    List<Map<String, Object>> userOrderDetailsData =
getJdbcTemplate().queryForList(sql,ordid);
    for(Map<String, Object> orderdetails : userOrderDetailsData) {
        OrderDetails ordDtl = new OrderDetails();
        ordDtl.setId((Integer)orderdetails.get("id"));
        ordDtl.setLoginid((String)orderdetails.get("loginid"));
        ordDtl.setCiid((Integer)orderdetails.get("ciid"));
        ordDtl.setOrderid((Integer)orderdetails.get("orderid"));
        ordDtl.setProductid((Integer)orderdetails.get("productid"));
        ordDtl.setBrandname((String)orderdetails.get("brandname"));
        ordDtl.setGender((String)orderdetails.get("gender"));
        ordDtl.setSize((Integer)orderdetails.get("size"));
        ordDtl.setPrice((Integer)orderdetails.get("price"));
        ordDtl.setOrderdate((Date)orderdetails.get("orderdate"));
        userOrderDetails.add(ordDtl);
    }
    return userOrderDetails;
}

@Override
public List<OrderDetails> getPurchaseReport(String rbrand, Date rdate) {
    List<OrderDetails> userPurchaseDetails = new ArrayList<OrderDetails>();
    String sql = "SELECT * FROM orderdetails where brandname=? and
orderdate=?";
    SimpleDateFormat sdf = new SimpleDateFormat("yyyy-MM-dd");
    List<Map<String, Object>> userPurchaseData =
getJdbcTemplate().queryForList(sql,rbrand,rdate);
    for(Map<String, Object> purchasedetails : userPurchaseData) {
        OrderDetails purchaseDtl = new OrderDetails();
        purchaseDtl.setId((Integer)purchasedetails.get("id"));
        purchaseDtl.setLoginid((String)purchasedetails.get("loginid"));
        purchaseDtl.setCiid((Integer)purchasedetails.get("ciid"));

```

```

        purchaseDtl.setOrderid((Integer)purchasedetails.get("orderid"));
        purchaseDtl.setProductid((Integer)purchasedetails.get("productid"));
        purchaseDtl.setBrandname((String)purchasedetails.get("brandname"));
        purchaseDtl.setGender((String)purchasedetails.get("gender"));
        purchaseDtl.setSize((Integer)purchasedetails.get("size"));
        purchaseDtl.setPrice((Integer)purchasedetails.get("price"));
        purchaseDtl.setOrderdate((Date)purchasedetails.get("orderdate"));
        userPurchaseDetails.add(purchaseDtl);
    }
    return userPurchaseDetails;
}
}
}

```

OrdersDao.java

```

package com.sportyshoes.web.dao;

import java.util.List;

import com.sportyshoes.web.model.Orders;

public interface OrdersDao {
    public List<Orders> getAllOrders();
    public int placeOrder(String lid);
    public int getUserOrderTotal(int ordid);
}

```

OrdersDaoImpl.java

```

package com.sportyshoes.web.dao;

import java.util.ArrayList;
import java.util.Calendar;
import java.util.Date;
import java.util.List;
import java.util.Map;

import javax.annotation.PostConstruct;
import javax.sql.DataSource;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.jdbc.core.support.JdbcDaoSupport;
import org.springframework.stereotype.Repository;

import com.sportyshoes.web.model.Cart;
import com.sportyshoes.web.model.OrderDetails;
import com.sportyshoes.web.model.Orders;

@Repository

```



```

public class OrdersDaoImpl extends JdbcDaoSupport implements OrdersDao {

    @Autowired
    DataSource dataSource;

    @Autowired
    CartDao cartDao;

    @Autowired
    OrderDetailsDao orderDetailsDao;

    @PostConstruct
    private void initialize() {
        setDataSource(dataSource);
    }

    @Override
    public List<Orders> getAllOrders() {
        List<Orders> allOrders = new ArrayList<Orders>();
        String sql = "SELECT * FROM orders";
        List<Map<String, Object>> allOrdersData =
getJdbcTemplate().queryForList(sql);
        for(Map<String, Object> order : allOrdersData) {
            Orders ord = new Orders();
            ord.setId((Integer)order.get("id"));
            ord.setLoginid((String)order.get("loginid"));
            ord.setOrderdate((Date)order.get("orderdate"));
            allOrders.add(ord);
        }
        return allOrders;
    }

    @Override
    public int placeOrder(String lid) {
        Calendar calendar = Calendar.getInstance();
        java.util.Date currentTime = calendar.getTime();

        List<Orders> allOrders = getAllOrders();
        int ordid = 1;
        for(Orders orditem : allOrders) {
            ordid++;
        }
        String sql = "insert into orders values(?,?,?)";
        int val = getJdbcTemplate().update(sql, new Object[] {ordid, lid,
currentTime});

        List<OrderDetails> allorderdetails =

```

```

orderDetailsDao.getAllOrderDetails();
        int orddtlid = 1;
        for(OrderDetails orddtl : allorderdetails) {
            orddtlid++;
        }

        List<Cart> cartitems = cartDao.getUserCartItems(lid);
        for(Cart bycartitem : cartitems) {
            orddtlid++;

            String orsql = "insert into orderdetails
values(?,?,?,?,?,?,?,?)";
            int oval = getJdbcTemplate().update(orsql, new Object[]
{orddtlid, lid, bycartitem.getId(), ordid, bycartitem.getProductid(),
bycartitem.getBrandname(), bycartitem.getGender(), bycartitem.getSize(),
bycartitem.getPrice(), currentTime});
        }

        String delcartsql = "delete from usercart where loginid=?";
        int dval = getJdbcTemplate().update(delcartsql, new Object[] {lid});

        return ordid;
    }

    @Override
    public int getUserOrderTotal(int ordid) {
        String sql = "select * from orderdetails where orderid = ?";
        List<Map<String, Object>> userorderData =
getJdbcTemplate().queryForList(sql, ordid);
        int userordertotal = 0;
        for(Map<String, Object> ord : userorderData) {
            userordertotal = userordertotal +(Integer)ord.get("price");
        }
        return userordertotal;
    }
}

```

ProductsDao.java

```

package com.sportyshoes.web.dao;

import java.util.List;

import com.sportyshoes.web.model.Products;

public interface ProductsDao {
    public List<Products> getAllProducts();
    public Products getProduct(int pid);
    public boolean updateProduct(int pid, String bn, String gd, int size, int
price);
}

```

```
public boolean addProduct(Products product);
```

```
}
```

```
ProductsDaoImpl.java
```

```
package com.sportyshoes.web.dao;
```

```
import java.util.ArrayList;
```

```
import java.util.List;
```

```
import java.util.Map;
```

```
import javax.annotation.PostConstruct;
```

```
import javax.sql.DataSource;
```

```
import org.springframework.beans.factory.annotation.Autowired;
```

```
import org.springframework.jdbc.core.support.JdbcDaoSupport;
```

```
import org.springframework.stereotype.Repository;
```

```
import com.sportyshoes.web.model.Products;
```

```
@Repository
```

```
public class ProductsDaoImpl extends JdbcDaoSupport implements ProductsDao{
```

```
    @Autowired
```

```
    DataSource dataSource;
```

```
    @PostConstruct
```

```
    private void initialize() {
```

```
        setDataSource(dataSource);
```

```
    }
```

```
    @Override
```

```
    public List<Products> getAllProducts() {
```

```
        List<Products> products = new ArrayList<Products>();
```

```
        String sql = "select * from products";
```

```
        List<Map<String, Object>> productsData =
```

```
getJdbcTemplate().queryForList(sql);
```

```
        for(Map<String, Object> prod : productsData) {
```

```
            Products product = new Products();
```

```
            product.setId((Integer)prod.get("id"));
```

```
            product.setBrandname((String)prod.get("brandname"));
```

```
            product.setGender((String)prod.get("gender"));
```

```
            product.setSize((Integer)prod.get("size"));
```

```
            product.setPrice((Integer)prod.get("price"));
```

```
            products.add(product);
```

```
        }
```

```
        return products;
```

```
    }
```

```
    @Override
```

```
    public Products getProduct(int pid) {
```

```

        List<Products> product = getAllProducts();
        Products prodData = new Products();
        for(Products prod : product) {
            int epid = prod.getId();
            if(epid == pid) {
                prodData.setId(pid);
                prodData.setBrandname(prod.getBrandname());
                prodData.setGender(prod.getGender());
                prodData.setSize(prod.getSize());
                prodData.setPrice(prod.getPrice());
            }
        }
        return prodData;
    }

    @Override
    public boolean updateProduct(int pid, String bn, String gd, int sz, int pr)
    {
        boolean isProductUpdated = false;
        String sql = "update products set brandname = ?, gender = ?, size = ?,
price = ? where id=?";
        int val = getJdbcTemplate().update(sql, bn, gd, sz, pr, pid);
        if(val>0)
            isProductUpdated=true;
        return isProductUpdated;
    }

    @Override
    public boolean addProduct(Products product) {
        boolean flag = false;
        List<Products> getprod = getAllProducts();
        int i = 1;
        for(Products gprod : getprod) {
            i++;
        }
        String sql = "insert into products values(?,?,?,?,?)";
        int val = getJdbcTemplate().update(sql, new Object[] {i,
product.getBrandname(), product.getGender(), product.getSize(),
product.getPrice()});
        if(val>0)
            flag = true;
        return flag;
    }
}

```

UsersDao.java

package com.sportyshoes.web.dao;

```

import java.util.List;

import com.sportyshoes.web.model.Users;

public interface UsersDao {
    public List<Users> getAllUsers();
    public boolean validateUser(String u, String p);
    public Users getUser(String lid);
    public boolean updateUser(String lid, String upw, String uemail, String uphone);
    public boolean addUser(Users user);
}

```

UsersDaoImpl.java

```

package com.sportyshoes.web.dao;

import java.util.ArrayList;
import java.util.List;
import java.util.Map;
import javax.annotation.PostConstruct;
import javax.sql.DataSource;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.jdbc.core.support.JdbcDaoSupport;
import org.springframework.stereotype.Repository;
import com.sportyshoes.web.model.Users;

@Repository
public class UsersDaoImpl extends JdbcDaoSupport implements UsersDao {

    @Autowired
    DataSource dataSource;

    @PostConstruct
    private void initialize() {
        setDataSource(dataSource);
    }

    @Override
    public List<Users> getAllUsers(){
        List<Users> users = new ArrayList<Users>();
        String sql = "select * from users";
        List<Map<String, Object>> usersData =
getJdbcTemplate().queryForList(sql);
        for(Map<String, Object> uid : usersData) {
            Users user = new Users();
            user.setLoginid((String)uid.get("loginid"));
            user.setPassword((String)uid.get("password"));

```

```

        user.setEmail((String)uid.get("email"));
        user.setPhone((String)uid.get("phone"));
        users.add(user);
    }
    return users;
}

@Override
public boolean validateUser(String u, String p) {
    List<Users> user = getAllUsers();
    Users userData = new Users();
    for(Users uid : user) {
        String un= uid.getLoginid();
        String up= uid.getPassword();
        if(un.equals(u)) {
            if(up.equals(p)) {
                return true;
            }
        }
    }
    return false;
}

@Override
public Users getUser(String lid) {
    List<Users> user = getAllUsers();
    Users userData = new Users();
    for(Users uData : user) {
        String elid = uData.getLoginid();
        if(lid.equals(elid)) {
            userData.setLoginid(uData.getLoginid());
            userData.setPassword(uData.getPassword());
            userData.setEmail(uData.getEmail());
            userData.setPhone(uData.getPhone());
        }
    }
    return userData;
}

@Override
public boolean updateUser(String lid, String upw, String uemail, String
uphone) {
    boolean isUserUpdated = false;
    String sql = "update users set password = ?, email = ?, phone = ?
where loginid=?";
    int val = getJdbcTemplate().update(sql, upw, uemail, uphone, lid);
    if(val>0)

```

```

        isUserUpdated=true;
        return isUserUpdated;
    }

    @Override
    public boolean addUser(Users user) {
        boolean flag = false;
        String sql = "insert into users values(?,?,?,?)";
        int val = getJdbcTemplate().update(sql, new Object[]
{user.getLoginid(), user.getPassword(), user.getEmail(), user.getPhone()});
        if(val>0)
            flag = true;
        return flag;
    }
}

```

Cart.java

```

package com.sportyshoes.web.model;

public class Cart {
    private int id;
    private int productid;
    private String loginid;
    private int price;
    private String brandname;
    private String gender;
    private int size;

    public Cart() {
    }

    public Cart(int id, int productid, String loginid, int price, String
brandname, String gender, int size) {
        this.id = id;
        this.productid = productid;
        this.loginid = loginid;
        this.price = price;
        this.brandname = brandname;
        this.gender = gender;
        this.size = size;
    }

    public Cart(int productid, String loginid, int price, String brandname,
String gender, int size) {
        this.productid = productid;
        this.loginid = loginid;
        this.price = price;
        this.brandname = brandname;
        this.gender = gender;
        this.size = size;
    }
}

```

```
public int getId() {  
    return id;  
}  
  
public void setId(int id) {  
    this.id = id;  
}  
  
public int getProductid() {  
    return productid;  
}  
  
public void setProductid(int productid) {  
    this.productid = productid;  
}  
  
public String getLoginid() {  
    return loginid;  
}  
  
public void setLoginid(String loginid) {  
    this.loginid = loginid;  
}  
  
public int getPrice() {  
    return price;  
}  
  
public void setPrice(int price) {  
    this.price = price;  
}  
  
public String getBrandname() {  
    return brandname;  
}  
  
public void setBrandname(String brandname) {  
    this.brandname = brandname;  
}  
  
public String getGender() {  
    return gender;  
}  
  
public void setGender(String gender) {  
    this.gender = gender;  
}  
  
public int getSize() {  
    return size;  
}  
  
public void setSize(int size) {  
    this.size = size;  
}
```



```

        @Override
        public String toString() {
            return "Cart [id=" + id + ", productid=" + productid + ", loginid=" +
loginid + ", price=" + price
                        + ", brandname=" + brandname + ", gender=" + gender + ",
size=" + size + "];"
        }
    }
}

```

OrderDetails.java

```

package com.sportyshoes.web.model;

import java.util.Date;

public class OrderDetails {
    private int id;
    private String loginid;
    private int ciid;
    private int orderid;
    private int productid;
    private String brandname;
    private String gender;
    private int size;
    private int price;
    private Date orderdate;

    public OrderDetails() {
    }

    public OrderDetails(int id, String loginid, int ciid, int orderid, int
productid, String brandname, String gender,
                        int size, int price, Date orderdate) {
        this.id = id;
        this.loginid = loginid;
        this.ciid = ciid;
        this.orderid = orderid;
        this.productid = productid;
        this.brandname = brandname;
        this.gender = gender;
        this.size = size;
        this.price = price;
        this.orderdate = orderdate;
    }

    public OrderDetails(String loginid, int ciid, int orderid, int productid,
String brandname, String gender,
                        int size, int price, Date orderdate) {
        this.loginid = loginid;
        this.ciid = ciid;
        this.orderid = orderid;
        this.productid = productid;
        this.brandname = brandname;
    }
}

```

```
        this.gender = gender;
        this.size = size;
        this.price = price;
        this.orderdate = orderdate;
    }

    public int getId() {
        return id;
    }

    public void setId(int id) {
        this.id = id;
    }

    public String getLoginid() {
        return loginid;
    }

    public void setLoginid(String loginid) {
        this.loginid = loginid;
    }

    public int getCiid() {
        return ciid;
    }

    public void setCiid(int ciid) {
        this.ciid = ciid;
    }

    public int getOrderid() {
        return orderid;
    }

    public void setOrderid(int orderid) {
        this.orderid = orderid;
    }

    public int getProductid() {
        return productid;
    }

    public void setProductid(int productid) {
        this.productid = productid;
    }

    public String getBrandname() {
        return brandname;
    }

    public void setBrandname(String brandname) {
        this.brandname = brandname;
    }

    public String getGender() {
```

```

        return gender;
    }

    public void setGender(String gender) {
        this.gender = gender;
    }

    public int getSize() {
        return size;
    }

    public void setSize(int size) {
        this.size = size;
    }

    public int getPrice() {
        return price;
    }

    public void setPrice(int price) {
        this.price = price;
    }

    public Date getOrderdate() {
        return orderdate;
    }

    public void setOrderdate(Date orderdate) {
        this.orderdate = orderdate;
    }

    @Override
    public String toString() {
        return "OrderDetails [id=" + id + ", loginid=" + loginid + ", ciid=" +
ciid + ", orderid=" + orderid
            + ", productid=" + productid + ", brandname=" +
brandname + ", gender=" + gender + ", size=" + size
            + ", price=" + price + ", orderdate=" + orderdate + "];"
    }
}

```

Orders.java

```

package com.sportyshoes.web.model;

import java.util.Date;

public class Orders {
    private int id;
    private String loginid;
    private Date orderdate;

    public Orders() {

    }
}

```

```

    public Orders(int id, String loginid, Date orderdate) {
        this.id = id;
        this.loginid = loginid;
        this.orderdate = orderdate;
    }

    public int getId() {
        return id;
    }

    public void setId(int id) {
        this.id = id;
    }

    public String getLoginid() {
        return loginid;
    }

    public void setLoginid(String loginid) {
        this.loginid = loginid;
    }

    public Date getOrderdate() {
        return orderdate;
    }

    public void setOrderdate(Date orderdate) {
        this.orderdate = orderdate;
    }

    @Override
    public String toString() {
        return "Orders [id=" + id + ", loginid=" + loginid + ", orderdate=" +
orderdate + "]";
    }
}

```

Products.java

```

package com.sportyshoes.web.model;

public class Products {
    private int id;
    private String brandname;
    private String gender;
    private int size;
    private int price;

    public Products() {
        //System.out.println("products constructor");
    }

    public Products(int id, String brandname, String gender, int size, int
price) {
        this.id = id;
    }
}

```

```
        this.brandname = brandname;
        this.gender = gender;
        this.size = size;
        this.price = price;
    }

    public Products(String brandname, String gender, int size, int price) {
        this.brandname = brandname;
        this.gender = gender;
        this.size = size;
        this.price = price;
    }

    public int getId() {
        return id;
    }

    public void setId(int id) {
        this.id = id;
    }

    public String getBrandname() {
        return brandname;
    }

    public void setBrandname(String brandname) {
        this.brandname = brandname;
    }

    public String getGender() {
        return gender;
    }

    public void setGender(String gender) {
        this.gender = gender;
    }

    public int getSize() {
        return size;
    }

    public void setSize(int size) {
        this.size = size;
    }

    public int getPrice() {
        return price;
    }

    public void setPrice(int price) {
        this.price = price;
    }

    @Override
    public String toString() {
```

```

        return "Products [id=" + id + ", brandname=" + brandname + ", gender="
+ gender + ", size=" + size + ", price="
        + price + "]";
    }
}

```

```

package com.sportyshoes.web.model;

```

```

public class Users {
    private String loginid;
    private String password;
    private String email;
    private String phone;

    public Users() {
        //
    }

    public Users(String loginid, String password) {
        this.loginid = loginid;
        this.password = password;
        this.email = email;
        this.phone = phone;
    }

    public String getLoginid() {
        return loginid;
    }

    public void setLoginid(String loginid) {
        this.loginid = loginid;
    }

    public String getPassword() {
        return password;
    }

    public void setPassword(String password) {
        this.password = password;
    }

    public String getEmail() {
        return email;
    }

    public void setEmail(String email) {
        this.email = email;
    }

    public String getPhone() {
        return phone;
    }

    public void setPhone(String phone) {
        this.phone = phone;
    }
}

```

```

    }

    @Override
    public String toString() {
        return "Users [loginid=" + loginid + ", password=" + password + ",
email=" + email + ", phone=" + phone + "]\n";
    }
}

```

CartService.java

```

package com.sportyshoes.web.service;

import java.util.List;

import com.sportyshoes.web.model.Cart;

public interface CartService {
    public List<Cart> getAllCartItems();
    public boolean addItemToCart(int pid, String lid, int pr, String bn, String
gd, int sz);
    public List<Cart> getUserCartItems(String lid);
    public int getUserCartTotal(String lid);
}

```

CartServiceImpl.java

```

package com.sportyshoes.web.service;

import java.util.List;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Service;

import com.sportyshoes.web.dao.CartDao;
import com.sportyshoes.web.model.Cart;

@Service
public class CartServiceImpl implements CartService {

    @Autowired
    CartDao cartDao;

    @Override
    public List<Cart> getAllCartItems() {
        return cartDao.getAllCartItems();
    }

    @Override
    public boolean addItemToCart(int pid, String lid, int pr, String bn, String
gd, int sz) {
        return cartDao.addItemToCart(pid,lid,pr,bn,gd,sz);
    }

    @Override
    public List<Cart> getUserCartItems(String lid) {
        return cartDao.getUserCartItems(lid);
    }
}

```

```

        @Override
        public int getUserCartTotal(String lid) {
            return cartDao.getUserCartTotal(lid);
        }
    }

```

```

}

```

OrderDetailsService.java

```

package com.sportyshoes.web.service;

```

```

import java.util.Date;
import java.util.List;

```

```

import com.sportyshoes.web.model.OrderDetails;

```

```

public interface OrderDetailsService {
    public List<OrderDetails> getUserOrderDetails(int ordid);
    public List<OrderDetails> getPurchaseReport(String rbrand, Date rdate);
}

```

OrderDetailsServiceImpl.java

```

package com.sportyshoes.web.service;

```

```

import java.util.Date;
import java.util.List;

```

```

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Service;

```

```

import com.sportyshoes.web.dao.OrderDetailsDao;
import com.sportyshoes.web.model.OrderDetails;

```

```

@Service

```

```

public class OrderDetailsServiceImpl implements OrderDetailsService{

```

```

    @Autowired
    OrderDetailsDao orderDetailsDao;

```

```

    @Override
    public List<OrderDetails> getUserOrderDetails(int ordid) {
        return orderDetailsDao.getUserOrderDetails(ordid);
    }

```

```

    @Override
    public List<OrderDetails> getPurchaseReport(String rbrand, Date rdate) {
        return orderDetailsDao.getPurchaseReport(rbrand, rdate);
    }

```

```

}

```

OrdersService.java

```

package com.sportyshoes.web.service;

```

```

public interface OrdersService {
    public int placeOrder(String lid);
    public int getUserOrderTotal(int ordid);
}

```


OrdersServiceImpl.java

```
package com.sportyshoes.web.service;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Service;

import com.sportyshoes.web.dao.OrdersDao;

@Service
public class OrdersServiceImpl implements OrdersService{

    @Autowired
    OrdersDao ordersDao;

    @Override
    public int placeOrder(String lid) {
        return ordersDao.placeOrder(lid);
    }

    @Override
    public int getUserOrderTotal(int ordid) {
        return ordersDao.getUserOrderTotal(ordid);
    }

}
```

ProductsService.java

```
package com.sportyshoes.web.service;

import java.util.List;

import com.sportyshoes.web.model.Products;

public interface ProductsService {
    public List<Products> getAllProducts();
    public Products getProduct(int pid);
    public boolean updateProduct(int pid, String bn, String gd, int sz, int pr);
    public boolean addProduct(Products product);
}
```

ProductsServiceImpl.java

```
package com.sportyshoes.web.service;

import java.util.List;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Service;

import com.sportyshoes.web.dao.ProductsDao;
import com.sportyshoes.web.model.Products;

@Service
public class ProductsServiceImpl implements ProductsService{

    @Autowired
    ProductsDao productsDao;
```

```

    @Override
    public List<Products> getAllProducts() {
        return productsDao.getAllProducts();
    }

    @Override
    public Products getProduct(int pid) {
        return productsDao.getProduct(pid);
    }

    @Override
    public boolean updateProduct(int pid, String bn, String gd, int sz, int pr)
    {
        return productsDao.updateProduct(pid, bn, gd, sz, pr);
    }

    @Override
    public boolean addProduct(Products product) {
        return productsDao.addProduct(product);
    }
}

```

UserService.java

```

package com.sportyshoes.web.service;

import java.util.List;

import com.sportyshoes.web.model.Users;

public interface UserService {
    public List<Users> getAllUsers();
    public boolean validateUser(String u, String p);
    public Users getUser(String lid); public boolean updateUser(String lid,
String upw, String uemail, String uphone);
    public boolean addUser(Users user);
}

```

UserServiceImpl.java

```

package com.sportyshoes.web.service;

import java.util.List;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.stereotype.Service;

import com.sportyshoes.web.dao.UsersDao;
import com.sportyshoes.web.model.Users;

@Service
public class UserServiceImpl implements UserService {
    @Autowired
    UsersDao userDao;

    @Override
    public List<Users> getAllUsers() {
        return userDao.getAllUsers();
    }
}

```

```

@Override
public boolean validateUser(String u, String p) {
    return userDao.validateUser(u, p);
}

@Override
public Users getUser(String lid) {
    return userDao.getUser(lid);
}

@Override
public boolean updateUser(String lid, String upw, String uemail, String
uphone) {
    return userDao.updateUser(lid, upw, uemail, uphone);
}

@Override
public boolean addUser(Users user) {
    return userDao.addUser(user);
}
}

```

Application.properties

```

spring.mvc.view.prefix=/views/
spring.mvc.view.suffix=.jsp
spring.datasource.driver-class-name=com.mysql.cj.jdbc.Driver
spring.datasource.url=jdbc:mysql://localhost:3306/springdb
spring.datasource.username=root
spring.datasource.password=root

```

Addproduct.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="left">
        <a href="/adminpage">Back to Admin Page</a>
    </div>
    <div align="center">
        <h2>Add New Product Information</h2>
    </div>
    <div align="center">
        <form action="addNewProduct" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <th>Brand Name:</th>
                    <td>
                        <input type="text" name="brandname"
size="45"/>

```

```

        </td>
    </tr>
    <tr>
        <th>Category:</th>
        <td>
            <input type="text" name="gender"
size="45"/>
        </td>
    </tr>
    <tr>
        <th>Size:</th>
        <td>
            <input type="number" name="size"
size="45"/>
        </td>
    </tr>
    <tr>
        <th>Price:</th>
        <td>
            <input type="number" name="price"
size="45"/>
        </td>
    </tr>
    <tr>
        <th></th>
        <td colspan="2" align="center">
            <input type="submit" value="Add Product" />
        </td>
    </tr>
</table>
</form>
</div>
</body>
</html>

```

Adduser.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <h2>Sign Up</h2>
    <div align="left">
        <a href="/index">Back to Main Page</a>
    </div>
    <div align="center">
        <form action="signUpUser" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <td>Login ID:</td>
                    <td><input type="text" placeholder="Enter Username"

```

```

name="loginid" required></td>
</tr>
<tr>
<td>Password:</td>
<td><input type="password" placeholder="Enter Password"
name="password" required></td>
</tr>
<tr>
<td>Email:</td>
<td><input type="email" placeholder="abc@xyz.com"
name="email" required></td>
</tr>
<tr>
<td>Phone/Mobile:</td>
<td><input type="number" placeholder="0501234567"
name="phone" required></td>
</tr>
<tr>
<td></td>
<td><input type="submit" value="Sign Up"></td>
</tr>
</table>
</form>
</div>
</body>
</html>

```

Adduserbyadmin.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
<h1>Welcome to Sporty Shoes</h1>
<div align="left">
<a href="/adminpage">Back to Admin Page</a>
</div>
<div align="center">
<h2>Add New User</h2>
</div>
<div align="center">
<form action="addNewUser" method="post">
<table border="1" cellpadding="5">
<tr>
<td>Login ID:</td>
<td><input type="text" placeholder="Enter Username"
name="loginid" required></td>
</tr>
<tr>
<td>Password:</td>
<td><input type="password" placeholder="Enter Password"
name="password" required></td>

```

```

        </tr>
        <tr>
            <td>Email:</td>
            <td><input type="email" placeholder="abc@xyz.com"
name="email" required></td>
        </tr>
        <tr>
            <td>Phone/Mobile:</td>
            <td><input type="number" placeholder="0501234567"
name="phone" required></td>
        </tr>
        <tr>
            <td></td>
            <td><input type="submit" value="Add User"></td>
        </tr>
    </table>
</form>
</div>
</body>
</html>

```

Adduserfail.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <h2>Admin Login</h2>
    <div align="center">
        <form action="addNewUser" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <td>Login ID:</td>
                    <td><input type="text" placeholder="Enter Username"
name="loginid" required></td>
                </tr>
                <tr>
                    <td>Password:</td>
                    <td><input type="password" placeholder="Enter Password"
name="password" required></td>
                </tr>
                <tr>
                    <td>Email:</td>
                    <td><input type="email" placeholder="abc@xyz.com"
name="email" required></td>
                </tr>
                <tr>
                    <td>Phone/Mobile:</td>
                    <td><input type="number" placeholder="0501234567"
name="phone" required></td>
                </tr>
            </table>
        </form>
    </div>

```

```

                <tr>
                    <td></td>
                    <td><input type="submit" value="Add User"></td>
                </tr>
            </table>
        </form>
    </div>
</body>
</html>

```

Adminlogin.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="center">
        <h2>Admin Login</h2>
    </div>
    <div align="right">
        <a href="/index">Sign Out</a>
    </div>
    <div align="center">
        <form action="validateAdmin" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <td>Login ID:</td>
                    <td><input type="text" placeholder="Enter Username"
name="username" required></td>
                </tr>
                <tr>
                    <td>Password:</td>
                    <td><input type="password" placeholder="Enter Password"
name="userpassword" required></td>
                </tr>
                <tr>
                    <td></td>
                    <td><input type="submit" value="Login"></td>
                </tr>
            </table>
        </form>
    </div>
</body>
</html>

```

Adminpage.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>

```

```

<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="right">
        <a href="/index">Sign Out</a>
    </div>
    <div align="center">
        <h2>Admin Page</h2>
    </div>
    <div align="center">
        <table border="1" cellpadding="5">
            <tr>
                <td>Manage Users</td>
                <td><a href="/listusers">View List</a></td>
                <td><a href="/adduserbyadmin">Add New</a></td>
            </tr>
            <tr>
                <td>Manage Products</td>
                <td><a href="/productslist">View List</a></td>
                <td><a href="/addproduct">Add New</a></td>
            </tr>
            <tr>
                <td>Purchase Report</td>
                <td><a href="/reportparam">View</a></td>
                <td></td>
            </tr>
        </table>
    </div>
</body>
</html>

```

Editproduct.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
<h1>Welcome to Sporty Shoes</h1>
    <div align="left">
        <a href="/adminpage">Back to Admin Page</a>
    </div>
    <div align="center">
        <h2>Edit Product Information</h2>
    </div>
    <div align="center">
        <form action="updateProduct" method="post">
            <table border="1" cellpadding="5">
                <input type="hidden" name="uid" value="

```



```

        <tr>
            <th>Brand Name:</th>
            <td>
                <input type="text" name="ubrandname"
size="45" value="<c:out value='${eproduct.brandname}' />" required/>
            </td>
        </tr>
        <tr>
            <th>Category:</th>
            <td>
                <input type="text" name="ugender" size="45"
value="<c:out value='${eproduct.gender}' />" required />
            </td>
        </tr>
        <tr>
            <th>Size:</th>
            <td>
                <input type="number" name="usize" size="45"
value="<c:out value='${eproduct.size}' />" required />
            </td>
        </tr>
        <tr>
            <th>Price:</th>
            <td>
                <input type="number" name="uprice"
size="45" value="<c:out value='${eproduct.price}' />" required/>
            </td>
        </tr>
        <tr>
            <th></th>
            <td colspan="2" align="center">
                <input type="submit" value="Update Product"
/>
            </td>
        </tr>
    </table>
</form>
</div>
</body>
</html>

```

Edituser.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="center">
        <h2>Update User Information</h2>
    </div>
    <div align="center">

```

```

        <form action="updateUser" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <td>Login ID:</td>
                    <td>
                        <input type="text" name="uloginid" size="45"
value='${euser.loginid}' required/>
                    </td>
                </tr>
                <tr>
                    <td>Password:</td>
                    <td>
                        <input type="password" name="upassword" size="45"
value='${euser.password}' required/>
                    </td>
                </tr>
                <tr>
                    <td>Email:</td>
                    <td>
                        <input type="email" name="uemail" size="45"
value='${euser.email}' required/>
                    </td>
                </tr>
                <tr>
                    <td>Phone/Mobile:</td>
                    <td>
                        <input type="number" name="uphone" size="45"
value='${euser.phone}' required/>
                    </td>
                </tr>
                <tr>
                    <td></td>
                    <td colspan="2" align="center">
                        <input type="submit" value="Update User" />
                    </td>
                </tr>
            </table>
        </form>
    </div>
</body>
</html>

```

Index.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <h2>List of Shoes</h2>

```

```

<div align="right">
    <th><a href="/adminlogin">Admin Login</a></th></br></br>
    <th><a href="/userlogin">Sign In</a></th>
    <th><a href="/adduser">Sign Up</a></th>
</div>

<div align="center">
    <form>
        <table border="1" cellpadding="5">
            <caption><h2>List of Shoes</h2></caption>
            <tr>
                <th>Brand</th>
                <th>Category</th>
                <th>Size</th>
                <th>Price</th>
            </tr>
            <c:forEach var="products" items="${products}">
                <tr>
                    <td><c:out value="${products.brandname}" /></td>
                    <td><c:out value="${products.gender}" /></td>
                    <td><c:out value="${products.size}" /></td>
                    <td><c:out value="${products.price}" /></td>
                </tr>
            </c:forEach>
        </table>
    </form>
</div>
</body>
</html>

```

Invalidadmin.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="center">
        <h2>Admin Login</h2>
    </div>
    <div align="center">
        <form action="validateAdmin" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <td></td>
                    <td><p style="color:red">Invalid User Name or
Password!</p></td>
                </tr>
                <tr>
                    <td>Login ID:</td>
                    <td><input type="text" placeholder="Enter Username"
name="username" required></td>

```

```

        </tr>
        <tr>
            <td>Password:</td>
            <td><input type="password" placeholder="Enter Password"
name="userpassword" required></td>
        </tr>
        <tr>
            <td></td>
            <td><input type="submit" value="Login"></td>
        </tr>
    </table>
</form>
</div>
</body>
</html>

```

Invaliduser.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="right">
        <a href="/index">Main Page</a>
    </div>
    <div align="center">
        <h2>User Login</h2>
    </div>
    <div align="center">
        <form action="validateUser" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <td></td>
                    <td><p style="color:red">Invalid User Name or
Password!</p></td>
                </tr>
                <tr>
                    <td>Login ID:</td>
                    <td><input type="text" placeholder="Enter Username"
name="username" required></td>
                </tr>
                <tr>
                    <td>Password:</td>
                    <td><input type="password" placeholder="Enter Password"
name="userpassword" required></td>
                </tr>
                <tr>
                    <td></td>
                    <td><input type="submit" value="Login"></td>
                </tr>
            </table>

```

```

        </form>
    </div>
</body>
</html>

```

productslist.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <h2>List of Shoes</h2>
    <div align="right">
        <a href="/adminpage">Back to Admin Page</a>
    </div>
    <div align="center">
        <form action="/editproduct" method="post">
            <table border="1" cellpadding="5">
                <caption><h2>List of Shoes</h2></caption>
                <tr>
                    <th>Brand</th>
                    <th>Category</th>
                    <th>Size</th>
                    <th>Price</th>
                    <th>Select Product</th>
                </tr>
                <c:forEach var="products" items="${products}">
                    <tr>
                        <td><c:out value="${products.brandname}" /></td>
                        <td><c:out value="${products.gender}" /></td>
                        <td><c:out value="${products.size}" /></td>
                        <td><c:out value="${products.price}" /></td>
                        <td>
                            <a href="/editproduct?pid=<c:out
value='${products.id}' />">Edit Info</a>
                        </td>
                    </tr>
                </c:forEach>
            </table>
        </form>
    </div>
</body>
</html>

```

purchasereport.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>

```

```

<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="right">
        <a href="/adminpage">Back to Admin Page</a>
    </div>
    <div align="right">
        <a href="/reportparam">Change Search</a>
    </div>
    <div align="center">
        <form>
            <table border="1" cellpadding="5">
                <caption><h3>Purchase Report</h3></caption>
                <tr>
                    <th>Customer</th>
                    <th>Order #</th>
                    <th>Order Date</th>
                    <th>Brand</th>
                    <th>Category</th>
                    <th>Size</th>
                    <th>Price</th>
                </tr>
                <c:forEach var="purchasedetails" items="${purchasedetails}">
                    <tr>
                        <td><c:out value="${purchasedetails.loginid}" /></td>
                        <td><c:out value="${purchasedetails.orderid}" /></td>
                        <td><c:out value="${purchasedetails.orderdate}" /></td>
                        <td><c:out value="${purchasedetails.brandname}" /></td>
                        <td><c:out value="${purchasedetails.gender}" /></td>
                        <td><c:out value="${purchasedetails.size}" /></td>
                        <td><c:out value="${purchasedetails.price}" /></td>
                    </tr>
                </c:forEach>
            </table>
        </form>
    </div>
</body>
</html>

```

rparam.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>

    <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/css/bootstrap.min.css">
    <link rel="stylesheet"
href="//code.jquery.com/ui/1.12.1/themes/base/jquery-ui.css">
    <script src="https://code.jquery.com/jquery-1.12.4.js"></script>

```

```

        <script src="https://code.jquery.com/ui/1.12.1/jquery-ui.js"></script>
        <script> $( function() {$( "#datepicker" ).datepicker(); } ); </script>

</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="right">
        <a href="/index">Sign Out</a>
    </div>
    <div align="center">
        <h2>Purchase Report</h2>
    </div>
    <div align="center">
        <h2>Provide Search Criteria</h2>
    </div>
    <div align="center">
        <form action="callReport" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <td>Select Brand:</td>
                    <td><input type="text" placeholder="Enter Brandname"
name="rbrand" required></td>
                </tr>
                <tr>
                    <td>Date of Purchase:</td>
                    <td><input type="date" class="form-control" id="datepicker"
name="rdate"></td>
                </tr>
                <tr>
                    <td></td>
                    <td><input type="submit" value="Show Report"></td>
                </tr>
            </table>
        </form>
    </div>

</body>
</html>

```

usercart.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <h2>Hello, ${username}</h2>
    <div align="center">
        <h3>Your Cart</h3>
    </div>
    <div align="right">

```

```

        <a href="/index">Sign Out</a>
    </div>
    <div align="right">
        <a href="/userPage?&username=<c:out value='${username}' />">Add More
Items</a>
    </div>
    <div align="center">
        <form action="/placeOrder" method="post">
            <table border="1" cellpadding="5">
                <caption><h3>Items in your cart</h3></caption>
                <tr>
                    <th>Brand</th>
                    <th>Category</th>
                    <th>Size</th>
                    <th>Price</th>
                </tr>
                <c:forEach var="cart" items="${cart}">
                    <tr>
                        <td><c:out value="${cart.brandname}" /></td>
                        <td><c:out value="${cart.gender}" /></td>
                        <td><c:out value="${cart.size}" /></td>
                        <td><c:out value="${cart.price}" /></td>
                    </tr>
                </c:forEach>
                <tr>
                    <th>Cart Total</th>
                    <th></th>
                    <th></th>
                    <td>${carttotal}</td>
                </tr>
                <tr>
                    <td>
                        <a href="/placeOrder?&lid=<c:out value='${username}'
/>">Place Order</a>
                    </td>
                </tr>
            </table>
        </form>
    </div>
</body>
</html>

```

userlist.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>

```



```

<h1>Welcome to Sporty Shoes</h1>
<div align="left">
    <a href="/adminpage">Back to Admin Page</a>
</div>
<div align="center">
    <form action="/edituser" method="post">
        <table border="1" cellpadding="5">
            <caption><h2>List of Users</h2></caption>
            <tr>
                <th>Login ID</th>
                <th>Email</th>
                <th>Phone/Mobile</th>
            </tr>
            <c:forEach var="Users" items="${Users}">
                <tr>
                    <td><c:out value="${Users.loginid}" /></td>
                    <td><c:out value="${Users.email}" /></td>
                    <td><c:out value="${Users.phone}" /></td>
                    <td>
                        <a href="/edituser?lid=<c:out
value='${Users.loginid}' />">Edit Info</a>
                    </td>
                </tr>
            </c:forEach>
        </table>
    </form>
</div>
</body>
</html>

```

userlogin.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <div align="center">
        <h2>User Login</h2>
    </div>
    <div align="right">
        <a href="/index">Main Page</a>
    </div>
    <div align="center">
        <form action="validateUser" method="post">
            <table border="1" cellpadding="5">
                <tr>
                    <td>Login ID:</td>
                    <td><input type="text" placeholder="Enter Username"
name="username" required></td>
                </tr>
            </table>
        </form>
    </div>

```

```

                <td>Password:</td>
                <td><input type="password" placeholder="Enter Password"
name="userpassword" required></td>
            </tr>
            <tr>
                <td></td>
                <td><input type="submit" value="Login"></td>
            </tr>
        </table>
    </form>
</div>
</body>
</html>

```

userorderpage.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <h2>Hello, ${username}</h2>
    <div align="center">
        <h3>Your Order Details</h3>
        <h3>Order #: ${orderid}</h3>
    </div>
    <div align="right">
        <a href="/index">Sign Out</a>
    </div>
    <div align="right">
        <a href="/userPage?&username=<c:out value='${username}' />">Continue
Shopping</a>
    </div>
    <div align="center">
        <form>
            <table border="1" cellpadding="5">
                <caption><h3>Order Details</h3></caption>
                <tr>
                    <th>Brand</th>
                    <th>Category</th>
                    <th>Size</th>
                    <th>Price</th>
                </tr>
                <c:forEach var="orderdetail" items="${orderdetail}">
                    <tr>
                        <td><c:out value="${orderdetail.brandname}" /></td>
                        <td><c:out value="${orderdetail.gender}" /></td>
                        <td><c:out value="${orderdetail.size}" /></td>
                        <td><c:out value="${orderdetail.price}" /></td>
                    </tr>
                </c:forEach>
            </table>
        </form>
    </div>

```

```

        <tr>
        <th>Order Total</th>
        <th></th>
        <th></th>
        <td>${ordertotal}</td>
        </tr>
        </table>
    </form>
</div>
</body>
</html>

```

userpage.jsp

```

<%@ page language="java" contentType="text/html; charset=UTF-8"
    pageEncoding="UTF-8"%>
<%@ taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="UTF-8">
<title>Sporty Shoes</title>
</head>
<body>
    <h1>Welcome to Sporty Shoes</h1>
    <h2>Hello, ${username}</h2>
    <h3>List of Shoes</h3>
    <div align="right">
        <a href="/index">Sign Out</a><br/>
        <a href="/viewcart?lid=<c:out value='${username}' />">View
Cart</a><br/>
    </div>
    <div align="center">
        <form action="/addToCart" method="post">
            <table border="1" cellpadding="5">
                <caption><h2>List of Shoes</h2></caption>
                <tr>
                    <th>Brand</th>
                    <th>Category</th>
                    <th>Size</th>
                    <th>Price</th>
                    <th></th>
                </tr>
                <c:forEach var="products" items="${products}">
                    <tr>
                        <td><c:out value="${products.brandname}" /></td>
                        <td><c:out value="${products.gender}" /></td>
                        <td><c:out value="${products.size}" /></td>
                        <td><c:out value="${products.price}" /></td>
                        <td>
                            <a href="/addToCart?pid=<c:out
value='${products.id}' />&lid=<c:out value='${username}' />&pr=<c:out
value='${products.price}' />&bn=<c:out value='${products.brandname}' />&gd=<c:out
value='${products.gender}' />&sz=<c:out value='${products.size}' />">Add to
Cart</a>
                        </td>
                    </tr>
                </tr>
            </table>
        </form>
    </div>
</body>
</html>

```

```

                </c:forEach>
            </table>
        </form>
    </div>
</body>
</html>

```

pom.xml

```

<?xml version="1.0" encoding="UTF-8"?>
<project xmlns="http://maven.apache.org/POM/4.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
  https://maven.apache.org/xsd/maven-4.0.0.xsd">
  <modelVersion>4.0.0</modelVersion>
  <parent>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-parent</artifactId>
    <version>2.5.6</version>
    <relativePath/> <!-- lookup parent from repository -->
  </parent>
  <groupId>com.sportyshoes.web.mvc</groupId>
  <artifactId>mysportyshoesproject</artifactId>
  <version>0.0.1-SNAPSHOT</version>
  <name>mysportyshoesproject</name>
  <description>Sporty Shoes Project</description>
  <properties>
    <java.version>1.8</java.version>
  </properties>
  <dependencies>
    <dependency>
      <groupId>org.springframework.boot</groupId>
      <artifactId>spring-boot-starter-web</artifactId>
    </dependency>

    <dependency>
      <groupId>org.springframework.boot</groupId>
      <artifactId>spring-boot-starter-test</artifactId>
      <scope>test</scope>
    </dependency>

    <!-- https://mvnrepository.com/artifact/org.springframework/spring-
webmvc -->
    <dependency>
      <groupId>org.springframework</groupId>
      <artifactId>spring-webmvc</artifactId>
      <version>5.3.12</version>
    </dependency>

    <!--
https://mvnrepository.com/artifact/org.apache.tomcat.embed/tomcat-embed-jasper -->
    <dependency>
      <groupId>org.apache.tomcat.embed</groupId>
      <artifactId>tomcat-embed-jasper</artifactId>
      <version>9.0.54</version>
    </dependency>

```

```

        <!--
https://mvnrepository.com/artifact/org.springframework.boot/spring-boot-starter-
jdbc -->
        <dependency>
            <groupId>org.springframework.boot</groupId>
            <artifactId>spring-boot-starter-jdbc</artifactId>
            <version>2.5.6</version>
        </dependency>

        <!-- https://mvnrepository.com/artifact/mysql/mysql-connector-java -->
        <dependency>
            <groupId>mysql</groupId>
            <artifactId>mysql-connector-java</artifactId>
            <version>8.0.27</version>
        </dependency>

        <!-- https://mvnrepository.com/artifact/jstl/jstl -->
        <dependency>
            <groupId>jstl</groupId>
            <artifactId>jstl</artifactId>
            <version>1.2</version>
        </dependency>

    </dependencies>

    <build>
        <plugins>
            <plugin>
                <groupId>org.springframework.boot</groupId>
                <artifactId>spring-boot-maven-plugin</artifactId>
            </plugin>
        </plugins>
    </build>
</project>

```

Database Tables:

Database Name: springdb
Table: users
<pre> CREATE TABLE `users` (`loginid` varchar(15) NOT NULL, `password` varchar(20) NOT NULL, `email` varchar(20) DEFAULT NULL, `phone` varchar(15) DEFAULT NULL, PRIMARY KEY (`loginid`), UNIQUE KEY `loginid_UNIQUE` (`loginid`)) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_0900_ai_ci; </pre>
Table: products
<pre> CREATE TABLE `products` (`id` int NOT NULL AUTO_INCREMENT, `brandname` varchar(45) DEFAULT NULL, </pre>

```
`gender` varchar(45) DEFAULT NULL,  
`size` int DEFAULT NULL,  
`price` int DEFAULT NULL,  
PRIMARY KEY (`id`),  
UNIQUE KEY `id_UNIQUE` (`id`)  
) ENGINE=InnoDB AUTO_INCREMENT=13 DEFAULT CHARSET=utf8mb4  
COLLATE=utf8mb4_0900_ai_ci;
```

Table: usercart

```
CREATE TABLE `usercart` (  
  `id` int NOT NULL AUTO_INCREMENT,  
  `productid` int NOT NULL,  
  `loginid` varchar(15) NOT NULL,  
  `price` int NOT NULL,  
  `brandname` varchar(45) DEFAULT NULL,  
  `gender` varchar(45) DEFAULT NULL,  
  `size` int DEFAULT NULL,  
  PRIMARY KEY (`id`),  
  UNIQUE KEY `id_UNIQUE` (`id`)  
) ENGINE=InnoDB AUTO_INCREMENT=16 DEFAULT CHARSET=utf8mb4  
COLLATE=utf8mb4_0900_ai_ci;
```

Table: orders

```
CREATE TABLE `orders` (  
  `id` int NOT NULL AUTO_INCREMENT,  
  `loginid` varchar(15) NOT NULL,  
  `orderdate` date DEFAULT NULL,  
  PRIMARY KEY (`id`),  
  UNIQUE KEY `id_UNIQUE` (`id`)  
) ENGINE=InnoDB AUTO_INCREMENT=13 DEFAULT CHARSET=utf8mb4  
COLLATE=utf8mb4_0900_ai_ci;
```

Table: orderdetails

```
CREATE TABLE `orderdetails` (  
  `id` int NOT NULL AUTO_INCREMENT,  
  `loginid` varchar(15) NOT NULL,  
  `ciid` int NOT NULL,  
  `orderid` int NOT NULL,  
  `productid` int NOT NULL,  
  `brandname` varchar(45) DEFAULT NULL,  
  `gender` varchar(45) DEFAULT NULL,  
  `size` int DEFAULT NULL,  
  `price` int NOT NULL,  
  `orderdate` date DEFAULT NULL,  
  PRIMARY KEY (`id`),  
  UNIQUE KEY `id_UNIQUE` (`id`)  
) ENGINE=InnoDB AUTO_INCREMENT=78 DEFAULT CHARSET=utf8mb4  
COLLATE=utf8mb4_0900_ai_ci;
```