

1. Using default bridge, we are able to connect to second container ip from first container. With container name we can not connect-it fails

```
PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container1 alpine sh
b5bd1060f59b303a02832bfb54c04099ff06dc91f7ed563cee39ab5efab489e2
PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
b5bd1060f59b   alpine    "sh"      8 seconds ago    Up 8 seconds           container1
PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container2 alpine sh
fd27cce310c1c6db0f10e169bbaf318ae7737c974fa4420081e9207d2390fec2
PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
fd27cce310c1   alpine    "sh"      4 seconds ago    Up 3 seconds           container2
b5bd1060f59b   alpine    "sh"      33 seconds ago   Up 32 seconds          container1
PS C:\Users\hp\gitrepos\Terraform> docker inspect container1
[
  {
    "Id": "b5bd1060f59b303a02832bfb54c04099ff06dc91f7ed563cee39ab5efab489e2",
    "Created": "2026-07-20T16:21:16.248383987Z",
    "Path": "sh",
    "Args": [],
    "State": {
      "Status": "running",
      "Running": true,
      "Paused": false,
```

Q

Search

Only show running containers

		Name	Container ID	Image	Port(s)	CP	Actions
		python-containe	ba993a52daef	pythonbackend	80:8000		
		focused_clarke	b4deba3a59eb	pavithra	3000:3000		
		epic_spence	2b73142a48c8	nginx	8080:80		
		naughty_golick	f2315f3ad35a	pythonbackend	80:8000		
		container1	b5bd1060f59b	alpine			
		container2	fd27cce310c1	alpine			

```
PS C:\Users\hp\gitrepos\Terraform> docker inspect container1
{
  "Labels": {},
  "NetworkSettings": {
    "SandboxID": "6d3c632e5c35354d1107fc2748f36011070b0a2196bad46081954676218cd357",
    "SandboxKey": "/var/run/docker/netns/6d3c632e5c35",
    "Ports": {},
    "Networks": {
      "bridge": {
        "IPAMConfig": null,
        "Links": null,
        "Aliases": null,
        "DriverOpts": null,
        "GwPriority": 0,
        "NetworkID": "1ba95f7dd0bbc7631ed03ef0a74c0bb7e17f8ca7094a6cc68d540f2c23ecbad3",
        "EndpointID": "85aadb1fdde506982279fccdec459b550280a92148e5c186a8826a419b570170",
        "Gateway": "172.17.0.1",
        "IPAddress": "172.17.0.2",
        "MacAddress": "72:bf:36:bb:9b:7e".
```

```

]
● PS C:\Users\hp\gitrepos\Terraform> docker inspect container2
[
  {
    "Id": "fd27cce310c1c6db0f10e169bbaf318ae7737c974fa4420081e9207d2390fec2",
    "Created": "2026-07-20T16:21:45.789226076Z",
    "Path": "sh",
    "Args": [],
    "State": {
      "Status": "running",
      "Running": true,
      "Paused": false,
      "Restarting": false,

```

```

PS C:\Users\hp\gitrepos\Terraform> docker inspect container2
    ],
    "Image": "alpine",
    "Volumes": null,
    "WorkingDir": "/",
    "Entrypoint": null,
    "Labels": {}
  },
  "NetworkSettings": {
    "SandboxID": "aaa90b0b5648f677e5511b17ab6d8bde63370063631a869ffa5d7948480e4e93",
    "SandboxKey": "/var/run/docker/netns/aaa90b0b5648",
    "Ports": {},
    "Networks": {
      "bridge": {
        "IPAMConfig": null,
        "Links": null,
        "Aliases": null,
        "DriverOpts": null,
        "GwPriority": 0,
        "NetworkID": "1ba95f7dd0bbc7631ed03ef0a74c0bb7e17f8ca7094a6cc68d540f2c23ecbad3",
        "EndpointID": "faab456f253af7357b3cb6c2476f9e13e4faf6444845b8e26a011ad3c2addbdb",
        "Gateway": "172.17.0.1",

```

```

● PS C:\Users\hp\gitrepos\Terraform> docker exec -it container1 sh
/ # ping 172.17.0.3
PING 172.17.0.3 (172.17.0.3): 56 data bytes
64 bytes from 172.17.0.3: seq=0 ttl=64 time=0.504 ms
64 bytes from 172.17.0.3: seq=1 ttl=64 time=0.122 ms
64 bytes from 172.17.0.3: seq=2 ttl=64 time=0.110 ms
64 bytes from 172.17.0.3: seq=3 ttl=64 time=0.139 ms
^C
--- 172.17.0.3 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max = 0.110/0.218/0.504 ms
/ # ping container2
ping: bad address 'container2'
/ # exit

What's next:
  Try Docker Debug for seamless, persistent debugging tools in any container or image → docker debug container1
  Learn more at https://docs.docker.com/go/debug-cli/
❖ PS C:\Users\hp\gitrepos\Terraform> █

```

2. With custom bridge we can connect to second container using ip from first container .and also with container name .

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS C:\Users\hp\gitrepos\Terraform> docker network create appnet
Error response from daemon: network with name appnet already exists

PS C:\Users\hp\gitrepos\Terraform> docker network rm -f appnet
appnet

PS C:\Users\hp\gitrepos\Terraform> docker network ls
NETWORK ID          NAME                DRIVER              SCOPE
1ba95f7dd0bb        bridge              bridge              local
9856b2d9fb57        host                host                local
246195e80d97        none                null                local

PS C:\Users\hp\gitrepos\Terraform> docker network create appnet
079669f73046583cb5ece2300fd3ed662dca4f65e9cb26ed4cb913f47f74f9da

PS C:\Users\hp\gitrepos\Terraform> docker network ls
NETWORK ID          NAME                DRIVER              SCOPE
079669f73046        appnet              bridge              local
1ba95f7dd0bb        bridge              bridge              local
9856b2d9fb57        host                host                local
246195e80d97        none                null                local

PS C:\Users\hp\gitrepos\Terraform> docker rm -f container1
container1

PS C:\Users\hp\gitrepos\Terraform> docker rm -f container2
container2

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED             STATUS              PORTS              NAMES
c0408422457ce56917c860bf4d1f1be218e965c70bcc92c804daf4a2df2df843

PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container1 --network appnet alpine sh
c0408422457ce56917c860bf4d1f1be218e965c70bcc92c804daf4a2df2df843

PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container2 --network appnet alpine sh
58ac2679a04759f07d9a47d82021eaa0b57bcf8e89210e1cff51fe9acbb88604

PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED             STATUS              PORTS              NAMES
58ac2679a047        alpine             "sh"               8 seconds ago       Up 7 seconds                container2
c0408422457c        alpine             "sh"               34 seconds ago      Up 33 seconds                container1

PS C:\Users\hp\gitrepos\Terraform> docker inspect container1
[
  {
    "Id": "c0408422457ce56917c860bf4d1f1be218e965c70bcc92c804daf4a2df2df843",
    "Created": "2026-07-20T16:39:08.410724372Z",
    "Path": "sh",
    "Args": [],
    "State": {
      "Status": "running",
      "Running": true,
      "Paused": false,
      "Restarting": false,
    },
    "NetworkSettings": {
      "SandboxID": "ce5dbe74dd99656d28509ef060d6573c09e96ace3c257363b0a1ae3b854d986f",
      "SandboxKey": "/var/run/docker/netns/ce5dbe74dd99",
      "Ports": {},
      "Networks": {
        "appnet": {
          "IPAMConfig": null,
          "Links": null,
          "Aliases": null,
          "DriverOpts": null,
          "GwPriority": 0,
          "NetworkID": "079669f73046583cb5ece2300fd3ed662dca4f65e9cb26ed4cb913f47f74f9da",
          "EndpointID": "2544254201c2712c7c50e82f1b821aeca6a0a249706e44ad200a0dd2648e8bed",
          "Gateway": "172.18.0.1",
          "IPAddress": "172.18.0.2",
          "MacAddress": "4a:5f:d5:28:06:hh".
        }
      }
    }
  }
]
```



```

PS C:\Users\hp\gitrepos\Terraform> docker inspect container2
[
  {
    "Id": "58ac2679a04759f07d9a47d82021eaa0b57bcf8e89210e1cff51fe9acbb88604",
    "Created": "2026-07-20T16:39:34.407257401Z",
    "Path": "sh",
    "Args": [],
    "State": {
      "Status": "running",
      "Running": true,
      "Paused": false,
      "Restarting": false,
      "OOMKilled": false,
      "Dead": false,
      "Pid": 951,
      "ExitCode": 0,
      "Error": "",
      "StartedAt": "2026-07-20T16:39:34.490994529Z",
      "FinishedAt": "0001-01-01T00:00:00Z"
    },
    "NetworkSettings": {
      "SandboxID": "642fd576b49cf5dd60cc5a94086d5d940877fa50e22c641a47f6af1530d7e6d9",
      "SandboxKey": "/var/run/docker/netns/642fd576b49c",
      "Ports": {},
      "Networks": {
        "appnet": {
          "IPAMConfig": null,
          "Links": null,
          "Aliases": null,
          "DriverOpts": null,
          "GwPriority": 0,
          "NetworkID": "079669f73046583cb5ece2300fd3ed662dca4f65e9cb26ed4cb913f47f74f9da",
          "EndpointID": "c04c777dbfcd049590a84b56c119864d07ce6cf721e81776822a555d546ee00f",
          "Gateway": "172.18.0.1",
          "IPAddress": "172.18.0.3",
          "MacAddress": "02:00:00:00:00:00"
        }
      }
    }
  }
]

```

```

PS C:\Users\hp\gitrepos\Terraform> docker exec -it container1 sh
/ # ping 172.18.0.3
PING 172.18.0.3 (172.18.0.3): 56 data bytes
64 bytes from 172.18.0.3: seq=0 ttl=64 time=0.398 ms
64 bytes from 172.18.0.3: seq=1 ttl=64 time=0.197 ms
64 bytes from 172.18.0.3: seq=2 ttl=64 time=0.115 ms
^C
--- 172.18.0.3 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.115/0.236/0.398 ms
/ # ping container2
PING container2 (172.18.0.3): 56 data bytes
64 bytes from 172.18.0.3: seq=0 ttl=64 time=0.098 ms
64 bytes from 172.18.0.3: seq=1 ttl=64 time=0.124 ms
64 bytes from 172.18.0.3: seq=2 ttl=64 time=0.196 ms
^C
--- container2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.098/0.139/0.196 ms
/ # exit

```

3. Create another network named othernet and trying to connect from appnet container1-it fails

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
PS C:\Users\hp\gitrepos\Terraform> docker network creat
docker: unknown command: docker network creat

Usage: docker network

Run 'docker network --help' for more information
PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container1 --network appnet alpine sh
ef6fddab592b775a4de825aad57c8396cee487b08607ab6c53cf27694d93586f
PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container2 --network appnet alpine sh
b66b99b121470b8cf82c47ed75cf2d911df8d5fa0c73165e5269fa9ae2471705
PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
b66b99b12147 alpine "sh" 5 seconds ago Up 5 seconds container2
ef6fddab592b alpine "sh" 13 seconds ago Up 12 seconds container1
PS C:\Users\hp\gitrepos\Terraform> docker network create othernet
cf4d8e22d85302088bf63cae608ab1e3f739b1ca95a40c94d3014c8e12e2cb5b
PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container3 --network othernet alpine sh
8cdc8dcffc6f19c27cef068edcf64c99210bbec79a4c55d79a5673728e7dfd18

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
8cdc8dcffc6f alpine "sh" 6 seconds ago Up 5 seconds container3
b66b99b12147 alpine "sh" About a minute ago Up About a minute container2
ef6fddab592b alpine "sh" About a minute ago Up About a minute container1
PS C:\Users\hp\gitrepos\Terraform> docker inspect container3
[
  {
    "Id": "8cdc8dcffc6f19c27cef068edcf64c99210bbec79a4c55d79a5673728e7dfd18",
    "Created": "2026-07-20T16:51:01.911067985Z",
    "Path": "sh",
    "Args": [],
    "State": {
      "Status": "running",
      "Running": true,
      ...
    }
  }
]

PS C:\Users\hp\gitrepos\Terraform> docker inspect container3
{
  "NetworkSettings": {
    "SandboxID": "da7314728885a88a6d3b68026c1d382dfee6c8ba80953e9b84e6052ee542182d",
    "SandboxKey": "/var/run/docker/netns/da7314728885",
    "Ports": {},
    "Networks": {
      "othernet": {
        "IPAMConfig": null,
        "Links": null,
        "Aliases": null,
        "DriverOpts": null,
        "GwPriority": 0,
        "NetworkID": "cf4d8e22d85302088bf63cae608ab1e3f739b1ca95a40c94d3014c8e12e2cb5b",
        "EndpointID": "f2187cd65d44da88aac6e8ef8d8a38cf066aeb37348849f0de78120e96141d4d",
        "Gateway": "172.19.0.1",
        "IPAddress": "172.19.0.2",
        ...
      }
    }
  }
}

PS C:\Users\hp\gitrepos\Terraform> docker exec -it container1 sh
/ # ping container3

ping: bad address 'container3'
/ #
/ # ping 172.19.0.2
PING 172.19.0.2 (172.19.0.2): 56 data bytes

^C
--- 172.19.0.2 ping statistics ---
17 packets transmitted, 0 packets received, 100% packet loss
/ # exit
```

4. Create another network named othernet inside it has container3 and to connect from appnet container1.

```
PS C:\Users\hp\gitrepos\Terraform> docker network creat appnet
• PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container1 --network appnet alpine sh
ef6fddab592b775a4de825aad57c8396cee487b08607ab6c53cf27694d93586f
• PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container2 --network appnet alpine sh
b66b99b121470b8cf82c47ed75cf2d911df8d5fa0c73165e5269fa9ae2471705
• PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
b66b99b12147   alpine    "sh"      5 seconds ago    Up 5 seconds           container2
ef6fddab592b   alpine    "sh"      13 seconds ago   Up 12 seconds          container1
• PS C:\Users\hp\gitrepos\Terraform> docker network create othernet
cf4d8e22d85302088bf63cae608ab1e3f739b1ca95a40c94d3014c8e12e2cb5b
• PS C:\Users\hp\gitrepos\Terraform> docker run -dit --name container3 --network othernet alpine sh
8cdc8dcffc6f19c27cef068edcf64c99210bbec79a4c55d79a5673728e7dfd18
• PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
8cdc8dcffc6f   alpine    "sh"      6 seconds ago    Up 5 seconds           container3
b66b99b12147   alpine    "sh"      About a minute ago    Up About a minute      container2
ef6fddab592b   alpine    "sh"      About a minute ago    Up About a minute      container1
```

```
• PS C:\Users\hp\gitrepos\Terraform> docker inspect container3
[
  {
    "Id": "8cdc8dcffc6f19c27cef068edcf64c99210bbec79a4c55d79a5673728e7dfd18",
    "Created": "2026-07-20T16:51:01.911067985Z",
    "Path": "sh",
    "Args": [],
    "State": {
      "Status": "running",
      "Running": true,
    },
    "NetworkSettings": {
      "SandboxID": "da7314728885a88a6d3b68026c1d382dfee6c8ba80953e9b84e6052ee542182d",
      "SandboxKey": "/var/run/docker/netns/da7314728885",
      "Ports": {},
      "Networks": {
        "othernet": {
          "IPAMConfig": null,
          "Links": null,
          "Aliases": null,
          "DriverOpts": null,
          "GwPriority": 0,
          "NetworkID": "cf4d8e22d85302088bf63cae608ab1e3f739b1ca95a40c94d3014c8e12e2cb5b",
          "EndpointID": "f2187cd65d44da88aac6e8ef8d8a38cf066aeb37348849f0de78120e96141d4d",
          "Gateway": "172.19.0.1",
          "IPAddress": "172.19.0.2",

```

```
• PS C:\Users\hp\gitrepos\Terraform> docker exec -it container1 sh
/ # ping container3

ping: bad address 'container3'
/ #
/ # ping 172.19.0.2
PING 172.19.0.2 (172.19.0.2): 56 data bytes

^C
--- 172.19.0.2 ping statistics ---
17 packets transmitted, 0 packets received, 100% packet loss
/ # exit
```



```

PS C:\Users\hp\gitrepos\Terraform> docker inspect container1
[
  {
    "appnet": {
      "IPAMConfig": null,
      "Links": null,
      "Aliases": null,
      "DriverOpts": null,
      "GwPriority": 0,
      "NetworkID": "079669f73046583cb5ece2300fd3ed662dca4f65e9cb26ed4cb913f47f74f9da",
      "EndpointID": "c28846d6b4a4ae78afa9397375c8b52e57f05bcd56ebf2d15dfd07723df4ba9f",
      "Gateway": "172.18.0.1",
      "IPAddress": "172.18.0.2",
      "MacAddress": "22:0f:41:74:ff:0c",
      "IPPrefixLen": 16,
      "IPv6Gateway": "",
      "GlobalIPv6Address": "",
      "GlobalIPv6PrefixLen": 0,
      "DNSNames": [
        "container1",
        "ef6fddab592b"
      ]
    },
    "othernet": {
      "IPAMConfig": {},
      "Links": null,
      "Aliases": [],
      "DriverOpts": {},
      "GwPriority": 0,
      "NetworkID": "cf4d8e22d85302088bf63cae608ab1e3f739b1ca95a40c94d3014c8e12e2cb5b",
      "EndpointID": "15e1f576363a1e265be513c056e304ba811436eb2ed73686bb90d6beb11179ba"
    }
  }
]

```

☐		Name	Container ID	Image	Port(s)	CP	Actions
☐	☐	python-containe	ba993a52daef	pythonbackend	80:8000		
☐	☐	focused_clarke	b4deba3a59eb	pavithra	3000:3000		
☐	☐	epic_spence	2b73142a48c8	nginx	8080:80		
☐	☐	naughty_golick	f2315f3ad35a	pythonbackend	80:8000		
☐	☒	container1	ef6fddab592b	alpine			
☐	☒	container2	b66b99b12147	alpine			
☒	☒	container3	8cdc8dcffc6f	alpine			

```

]
PS C:\Users\hp\gitrepos\Terraform> docker exec -it container1 sh
/ # ping container3
ping: bad address 'container3'
/ # exit

```

```

• PS C:\Users\hp\gitrepos\Terraform> docker network disconnect othernet container1
• PS C:\Users\hp\gitrepos\Terraform> docker inspect container1
[
  {
    "Id": "ef6fddab592b775a4de825aad57c8396cee487b08607ab6c53cf27694d93586f",
    "Created": "2026-07-20T16:49:59.664304799Z",
    "Path": "sh",
    "Args": [],
    "State": {
      "Status": "running",
      "Running": true,
      "Paused": false,
      "Restarting": false,
      "OOMKilled": false
    },
    "NetworkSettings": {
      "SandboxID": "36a5b536ef6d6f08a7b41a88a411709650f75b46c9efaf7fa9ff10800d4d104",
      "SandboxKey": "/var/run/docker/netns/36a5b536ef6f",
      "Ports": {},
      "Networks": {
        "appnet": {
          "IPAMConfig": null,
          "Links": null,
          "Aliases": null,
          "DriverOpts": null,
          "GwPriority": 0,
          "NetworkID": "079669f73046583cb5ece2300fd3ed662dca4f65e9cb26ed4cb913f47f74f9da",
          "EndpointID": "c28846d6b4a4ae78afa9397375c8b52e57f05bcd56ebf2d15dfd07723df4ba9f",
          "Gateway": "172.18.0.1",
          "IPAddress": "172.18.0.2",
          "MacAddress": "02:0f:a1:7a:ff:0e"
        }
      }
    }
  }
]

```

5. Creating frontend and backend inside same network and showing their outputs

```

• PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
• PS C:\Users\hp\gitrepos\Terraform> docker network create bsnlnet

```

```

• PS C:\Users\hp\gitrepos\Terraform> docker network ls
NETWORK ID      NAME      DRIVER  SCOPE
079669f73046    appnet    bridge   local
352a132df7bc    bridge    bridge   local
ca396cc39028    bsnlnet   bridge   local
9856b2d9fb57    host      host     local
a75c59cae424    mynetwork bridge   local
246195e80d97    none      null     local
cf4d8e22d853    othernet  bridge   local
• PS C:\Users\hp\gitrepos\Terraform> docker run -d --name frontend --network bsnlnet -p 3000:3000 pavithra
aa46dacaf8770bbc4778be8ce1f005cfe00bd371bcc32833147da729096e15ab
• PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID   IMAGE     COMMAND   CREATED   STATUS    PORTS   NAMES
aa46dacaf877    pavithra  "docker-entrypoint.s..." 6 seconds ago Up 5 seconds 0.0.0.0:3000->3000/tcp, [::]:3000->3000/tcp frontend
• PS C:\Users\hp\gitrepos\Terraform> docker run -d --name backend --network bsnlnet -p 80:8000 pythonbackend
9649fe6b2097b162de2ff646449fd143590239cd62d96d2533633397300cf8dd
• PS C:\Users\hp\gitrepos\Terraform> docker ps
CONTAINER ID   IMAGE           COMMAND   CREATED   STATUS    PORTS   NAMES
9649fe6b2097    pythonbackend  "uvicorn main:app --..." 4 seconds ago Up 3 seconds 0.0.0.0:80->8000/tcp, [::]:80->8000/tcp backend
aa46dacaf877    pavithra      "docker-entrypoint.s..." 10 minutes ago Up 10 minutes 0.0.0.0:3000->3000/tcp, [::]:3000->3000/tcp frontend

```



```

Learn more at https://docs.docker.com/go/debug-cli/
● PS C:\Users\hp\gitrepos\Terraform> docker exec -it frontend sh
/app # ping backend
PING backend (172.21.0.3): 56 data bytes
64 bytes from 172.21.0.3: seq=0 ttl=64 time=0.099 ms
64 bytes from 172.21.0.3: seq=1 ttl=64 time=0.134 ms
64 bytes from 172.21.0.3: seq=2 ttl=64 time=0.165 ms
64 bytes from 172.21.0.3: seq=3 ttl=64 time=0.126 ms
^C
--- backend ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max = 0.099/0.131/0.165 ms
/app # exit

What's next:
Try Docker Debug for seamless, persistent debugging tools in any container or image → docker debug frontend
Learn more at https://docs.docker.com/go/debug-cli/
○ PS C:\Users\hp\gitrepos\Terraform>

```

```



● PS C:\Users\hp\gitrepos\Terraform> docker network inspect bsnlnet
[
  {
    "Name": "bsnlnet",
    "Id": "ca396cc390282c1f97041c35314e6ead7a7104f2d563b2688c4c97933979a7fb",
    "Created": "2026-07-20T17:49:38.842208735Z",
    "Scope": "local",
    "Driver": "bridge",
    "EnableIPv4": true,
    "EnableIPv6": false,
    "IPAM": {
      "Driver": "default",
      "Options": {},
      "Config": [
        {
          "Subnet": "172.21.0.0/16",
          "Gateway": "172.21.0.1"
        }
      ]
    }
  }
]

```

```

},
"Labels": {},
"Containers": {
  "9649fe6b2097b162de2ff646449fd143590239cd62d96d2533633397300cf8dd": {
    "Name": "backend",
    "EndpointID": "10656ae32acedf1eaf1b9fc991d8cb1216cf5dea43752db60de522980d775909",
    "MacAddress": "76:da:97:6c:8f:49",
    "IPv4Address": "172.21.0.3/16",
    "IPv6Address": ""
  },
  "aa46dacaf8770bbc4778be8ce1f005cfe00bd371bcc32833147da729096e15ab": {
    "Name": "frontend",
    "EndpointID": "e92e961325bc1828e1e9be584dc222cfa4704b891165e40c93dd2342ca64b53d",
    "MacAddress": "ca:a5:3f:dc:ce:69",
    "IPv4Address": "172.21.0.2/16",
    "IPv6Address": ""
  }
},
"Status": {
  "IPAM": {
    "Subnets": {
      "172.21.0.0/16": {
        "IPsInUse": 5,
        "DynamicIPsAvailable": 65531
      }
    }
  }
}
}

```

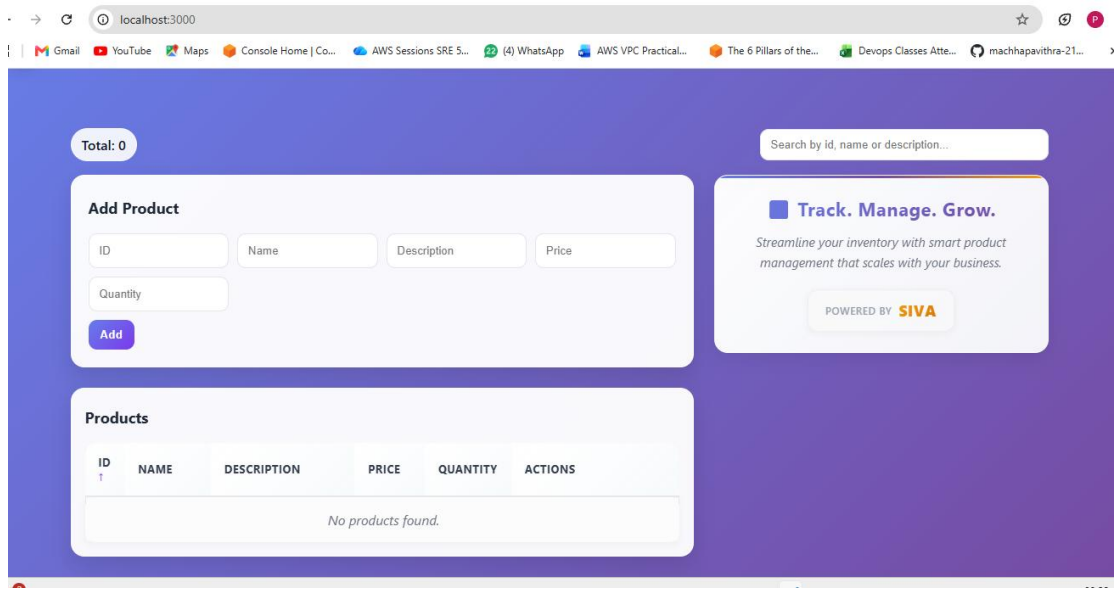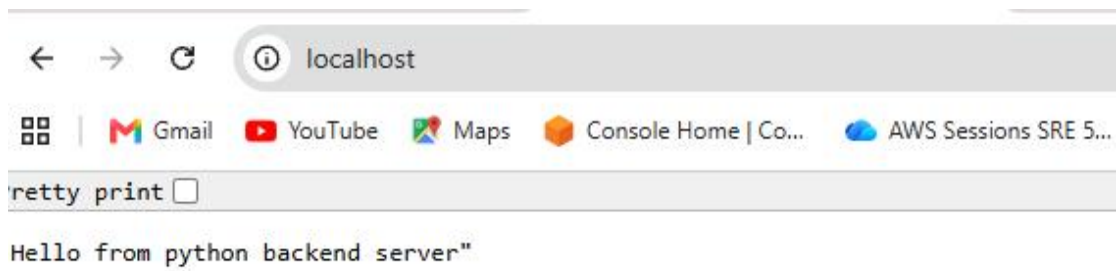

☐		frontend	aa46dacaf877	pavithra	3000:3000	C				
☐		backend	9649fe6b2097	pythonbackend	80:8000	C				