

Sub Resource Integrity Attribute Missing (Systemic)

Assessment Identifier: **WS-DYN-06** | Assessment Type: **Dynamic** | Date: **September 08, 2026**

Severity: MEDIUM	CVSS: 4.8	CWE: CWE-345
OWASP: A08:2021 - Software and Data Integrity Failures	WASC ID: 15	Confidence: High
Target / Component: Application Landing Page Header	Affected URL: https://www.worldmonitor.app/	Parameter: <script> source tag: abacus.worldmonitor.app/script.js

1. Description

The integrity attribute is missing on a script or link tag served by an external server. The integrity tag prevents an attacker who has gained access to this server from injecting a malicious content.

2. Steps to Reproduce

1. Send an HTTP GET request to https://www.worldmonitor.app/.
2. Inspect the HTML document body returned in the response.
3. Locate externally hosted <script> or <link> tags (e.g., https://abacus.worldmonitor.app/script.js).
4. Verify that the <script> tag lacks an integrity attribute containing a cryptographic hash.

3. Controlled Proof of Concept

HTML Evidence:

```
<script async defer src="https://abacus.worldmonitor.app/script.js"
data-website-id="e8800335-c853-46a8-8497-c993ed2f68bc"
data-domains="worldmonitor.app,www.worldmonitor.app,happy.worldmonitor.app"
nonce="wm-static-bootstrap"></script>
(Notice: No integrity="sha384-..." attribute)
```

4. Business & Security Impact

Loading external scripts without Subresource Integrity (SRI) exposes the web application to supply-chain attacks. If the third-party server hosting script.js or its Content Delivery Network (CDN) is compromised, an attacker can modify the remote JavaScript file to execute malicious code within the context of all application users, leading to credential theft, DOM manipulation, or session hijacking.

5. Remediation Recommendations

Primary Fix: Generate and attach cryptographic SRI hash attributes alongside crossorigin="anonymous" for all external scripts.

1. Generate a cryptographic hash (e.g., SHA-256, SHA-384, or SHA-512) of the target external resource.
2. Add the integrity attribute alongside crossorigin="anonymous" to all external <script> and <link> elements. Example:


```
<script async defer src="https://abacus.worldmonitor.app/script.js" integrity="sha384-..." crossorigin="anonymous"></script>
```

6. Evidence & Validation

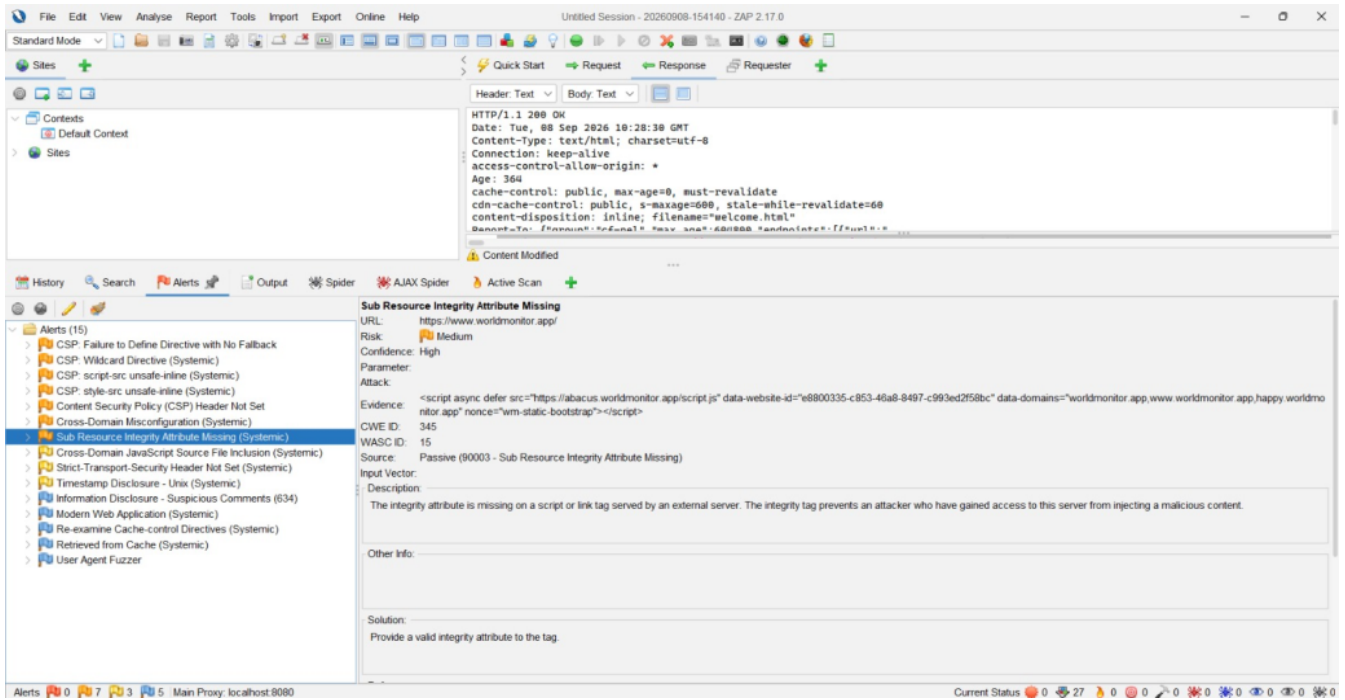


Figure 1: Matched Proof-of-Concept Screenshot for Vulnerability #6 (6/poc-1.png)

Authorization & Safety Compliance: This security assessment was conducted strictly under authorized parameters in accordance with ethical hacking standards. All validations and safe proof-of-concept tests were non-destructive. No persistent modifications or sensitive data exfiltration occurred.