

DATABRICKS SQL PROJECT

Dataset: Sample bakehouse(franchise sales)

Data used:

Franchise dataset,listing details like franchiseid,state,district,zipcode,latitude,longitude

Schema used:


Catalog: Workspace ,scheme : default ,table : dataset from franchise bake house.

DML(DATA MANIPULATION LANGUAGE):

SELECT city, district

FROM samples.bakehouse.sales_franchises


WHERE size = 'L'

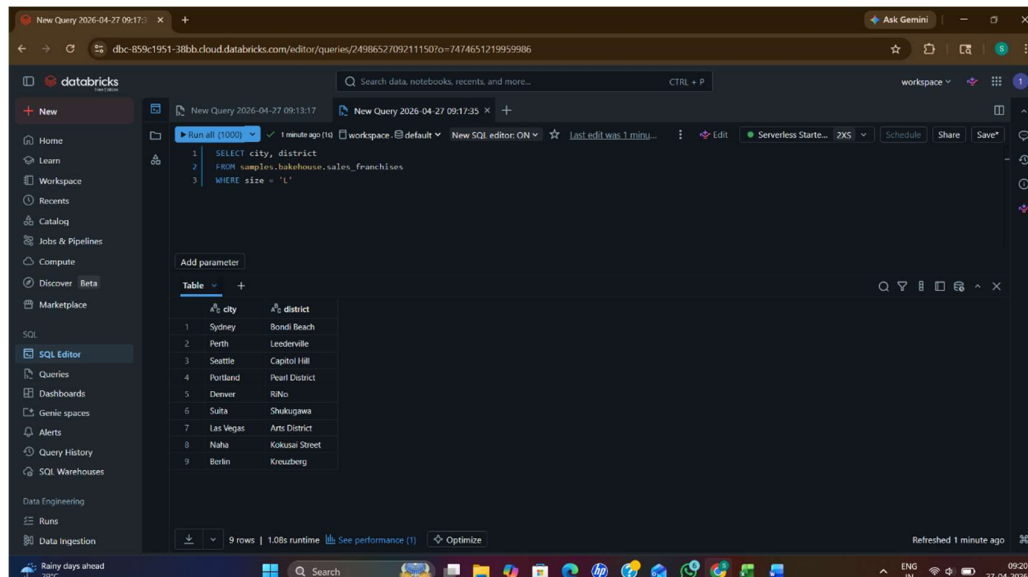

2] SELECT franchiseid, name

FROM samples.bakehouse.sales_franchises

3] Select * from franchiseid

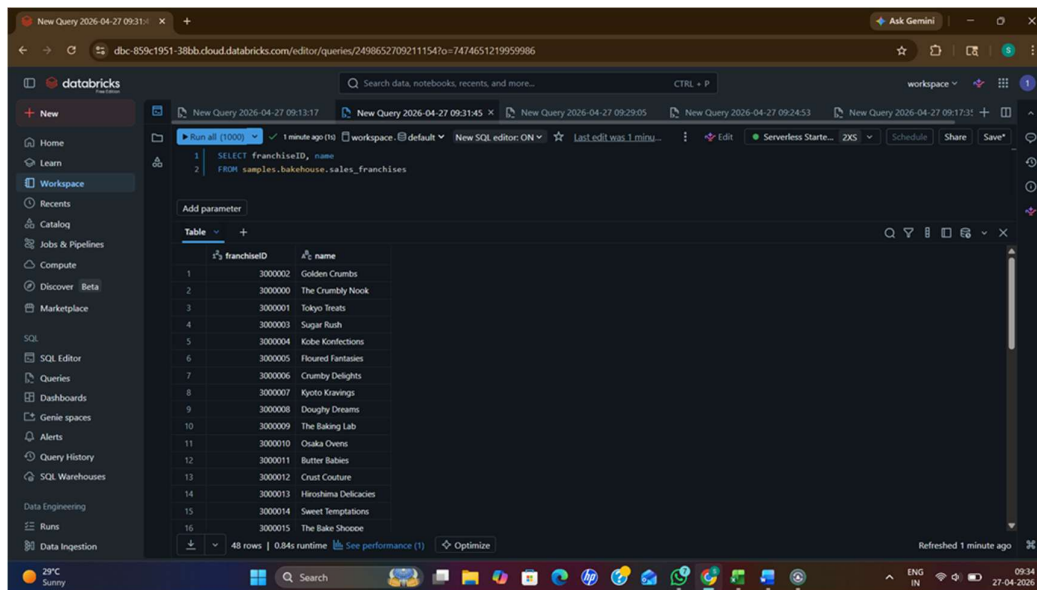


The screenshot shows the Databricks SQL Editor interface. The query editor contains the following SQL code:

```
1 SELECT franchiseid, name
2 FROM samples.bakehouse.sales_franchises
```

The results table displays 16 rows of data:

franchiseid	name
3000002	Golden Crumbs
3000000	The Crumbly Nook
3000001	Tokyo Treats
3000003	Sugar Rush
3000004	Kobe Konfections
3000005	Floured Fantasies
3000006	Crumbly Delights
3000007	Kyoto Kravings
3000008	Doughy Dreams
3000009	The Baking Lab
3000010	Osaka Ovens
3000011	Butter Babies
3000012	Crust Couture
3000013	Hiroshima Delicacies
3000014	Sweet Temptations
3000015	The Bake Shooee

The interface also shows a sidebar with navigation options like Home, Workspace, Catalog, and Compute. The bottom status bar indicates 48 rows and 0.84s runtime.

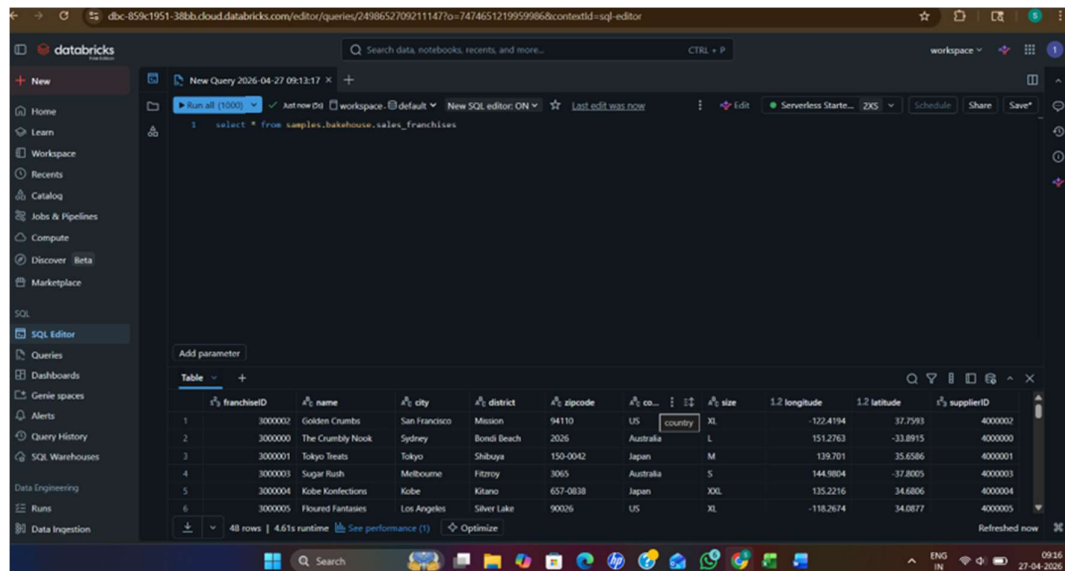

The screenshot shows the Databricks SQL Editor interface. The query editor contains the following SQL code:

```
1 select * from samples.bakehouse.sales_franchises
```

The results table displays 16 rows of data:

franchiseid	name	city	district	zipcode	country	size	longitude	latitude	supplierid
3000002	Golden Crumbs	San Francisco	Mission	94110	US	XL	-122.4194	37.7593	4000002
3000000	The Crumbly Nook	Sydney	Bondi Beach	2026	Australia	L	151.2763	-33.8915	4000000
3000001	Tokyo Treats	Tokyo	Shibuya	150-0042	Japan	M	139.701	35.6586	4000001
3000003	Sugar Rush	Melbourne	Fitzroy	3065	Australia	S	144.9804	-37.8005	4000003
3000004	Kobe Konfections	Kobe	Kitano	657-0838	Japan	XXL	135.2216	34.6806	4000004
3000005	Floured Fantasies	Los Angeles	Silver Lake	90026	US	XL	-118.2674	34.0877	4000005

The interface also shows a sidebar with navigation options like Home, Workspace, Catalog, and Compute. The bottom status bar indicates 48 rows and 4.67s runtime.


4]SELECT name, country

FROM samples.bakehouse.sales_franchises

WHERE country = 'Japan';

5] latitude, longitude

FROM samples.bakehouse.sales_franchises

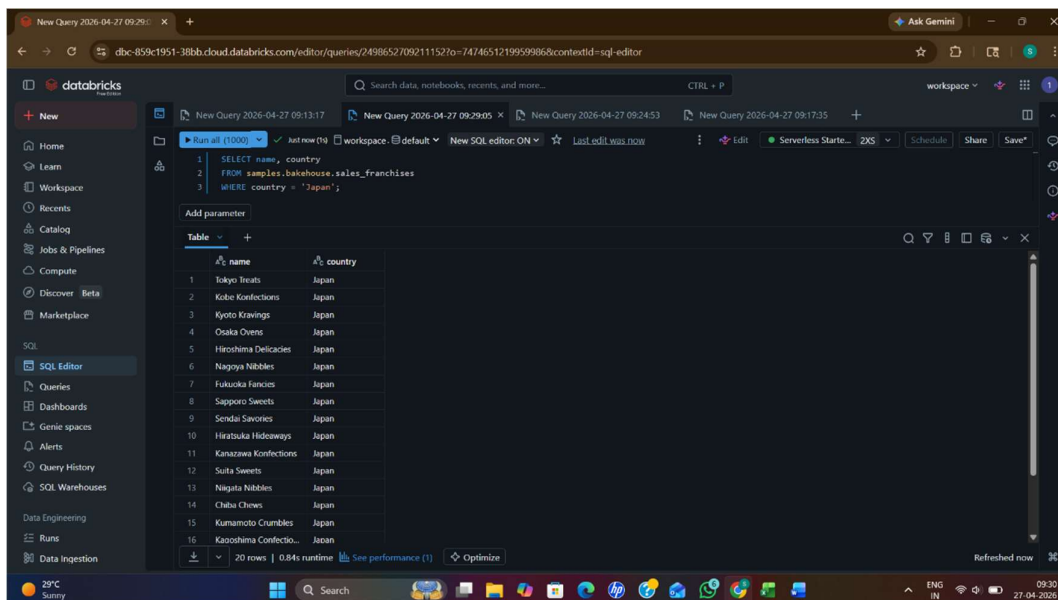


The screenshot shows the Databricks SQL Editor interface. The query editor contains the following SQL code:

```
1 SELECT name, country
2 FROM samples.bakehouse.sales_franchises
3 WHERE country = 'Japan';
```

The results table displays 16 rows of data, showing the name and country of various sales franchises in Japan.

	name	country
1	Tokyo Treats	Japan
2	Kobe Confectioners	Japan
3	Kyoto Kravings	Japan
4	Osaka Ovens	Japan
5	Hiroshima Delicacies	Japan
6	Nagoya Nibbles	Japan
7	Fukuoka Fancies	Japan
8	Sapporo Sweets	Japan
9	Sendai Savories	Japan
10	Hiratsuka Hideaways	Japan
11	Kanazawa Konfections	Japan
12	Suita Sweets	Japan
13	Niigata Nibbles	Japan
14	Chiba Chews	Japan
15	Kumamoto Crumbles	Japan
16	Kaochima Confection...	Japan

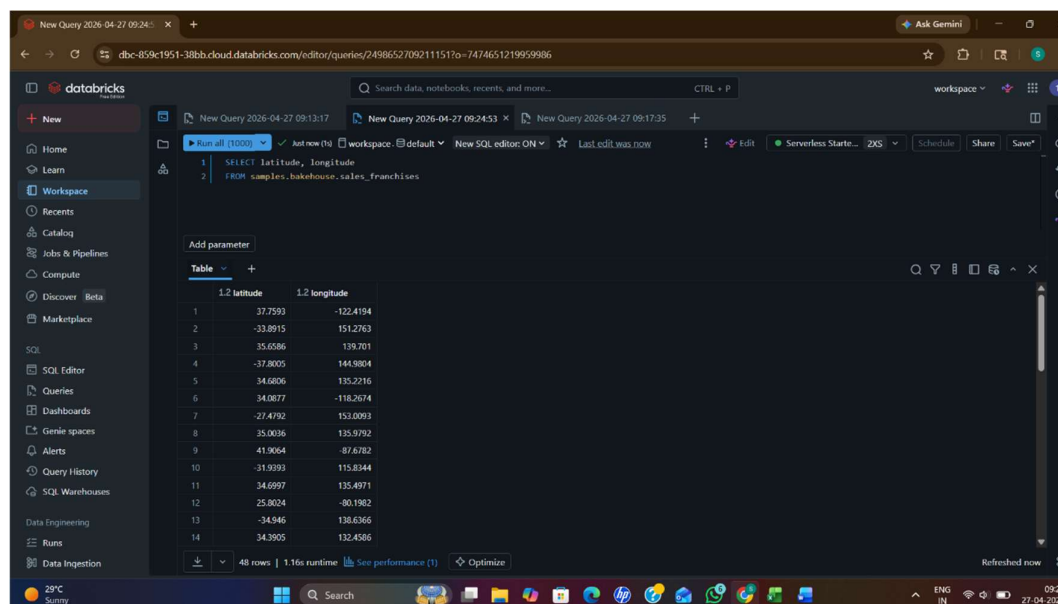

The screenshot shows the Databricks SQL Editor interface. The query editor contains the following SQL code:

```
1 SELECT latitude, longitude
2 FROM samples.bakehouse.sales_franchises
```

The results table displays 14 rows of data, showing the latitude and longitude of various sales franchises.

	latitude	longitude
1	37.7593	-122.4194
2	-33.8915	151.2763
3	35.6586	139.701
4	-37.8005	144.8804
5	34.6806	135.2216
6	34.0677	-118.2674
7	-27.4792	151.0093
8	25.0036	135.9792
9	41.9064	-87.6782
10	-31.9393	115.8344
11	34.6997	135.4971
12	25.8024	-80.1982
13	-34.946	138.6366
14	34.3905	132.4586

```

6] CREATE TABLE IF NOT EXISTS workspace.default.state (

state_id INT,

state_name STRING

);

INSERT INTO workspace.default.state (state_id, state_name)

VALUES (1, 'California');

```

