Experiment 15: Information Gathering Using theHarvester in Kali Linux

Aim

To perform information gathering using theHarvester in Kali Linux to collect publicly available information such as email addresses, subdomains, and hostnames associated with a target domain.

Procedure


1. Start Kali Linux and open the Terminal.
2. Check whether theHarvester is installed.
3. Select a domain that you own or have permission to investigate.
4. Run theHarvester with a supported public data source.
5. Observe the collected email addresses, hostnames, and subdomains.
6. Record the output for the lab report.

Code

Input 1

```
theHarvester -h
```


Output 1 (sample):

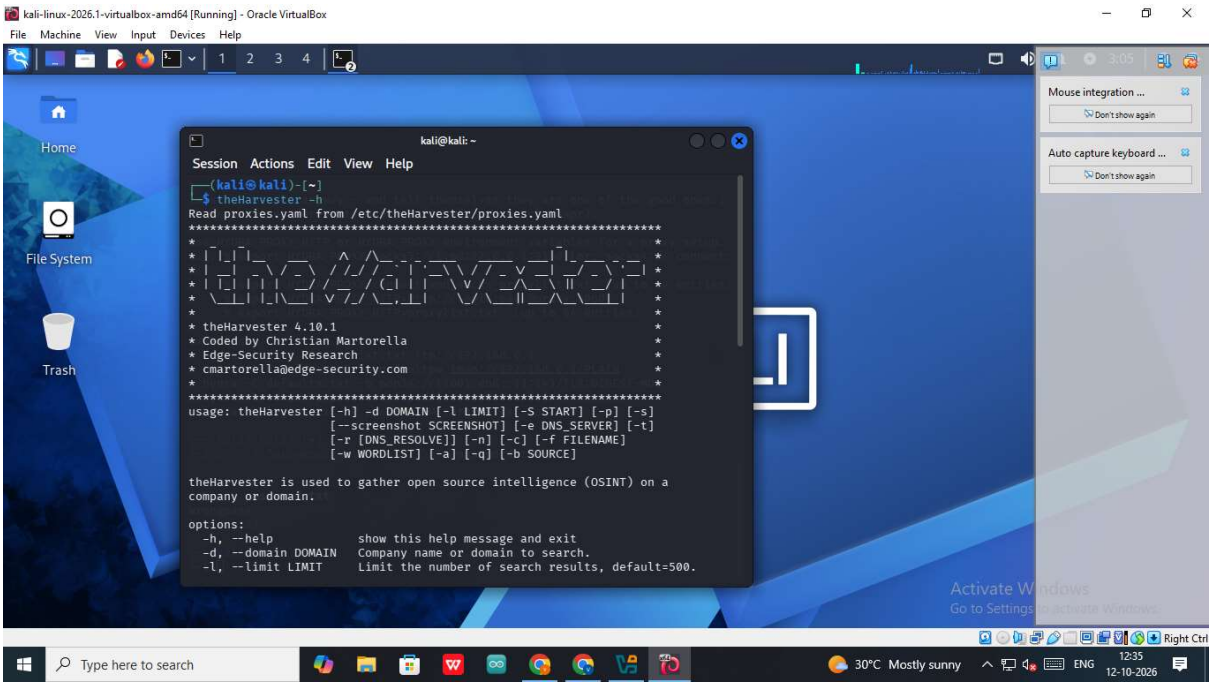

Input 2

```
theHarvester -d example.com -b duckduckgo
```

Output 2 (illustrative):

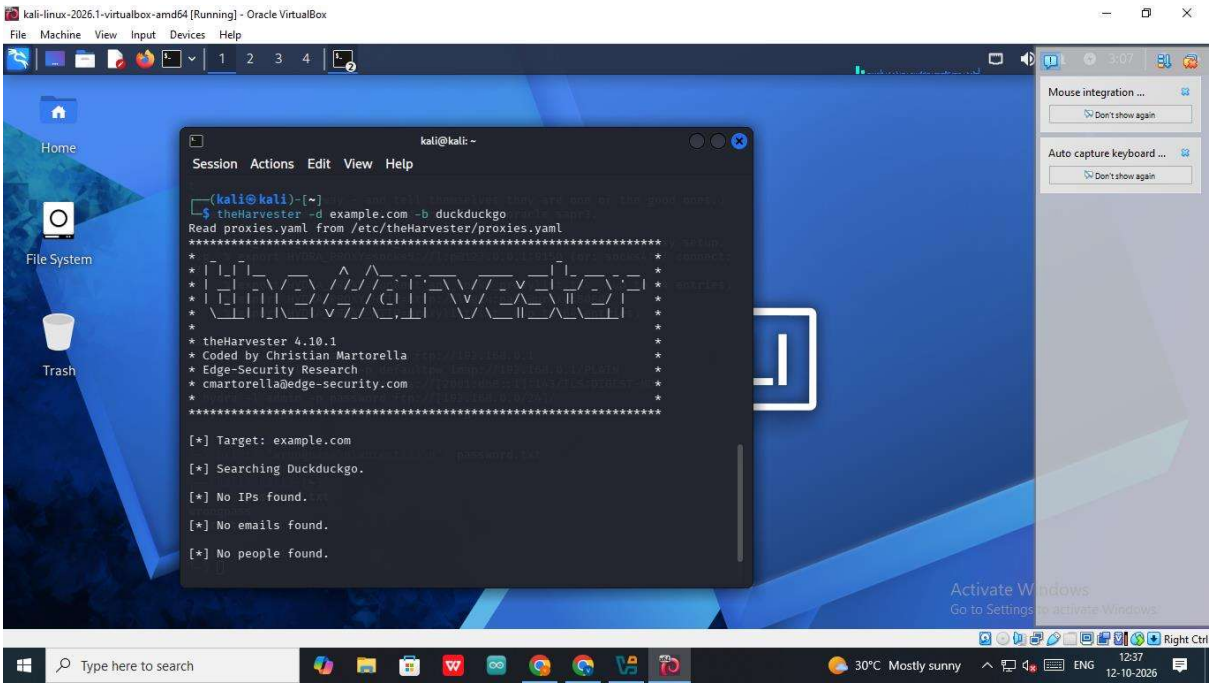

Result

Information gathering using theHarvester was demonstrated in Kali Linux. The tool can help identify publicly available email addresses, subdomains, and hostnames for authorized security assessments.