



USER STORY REVIEW AGENT

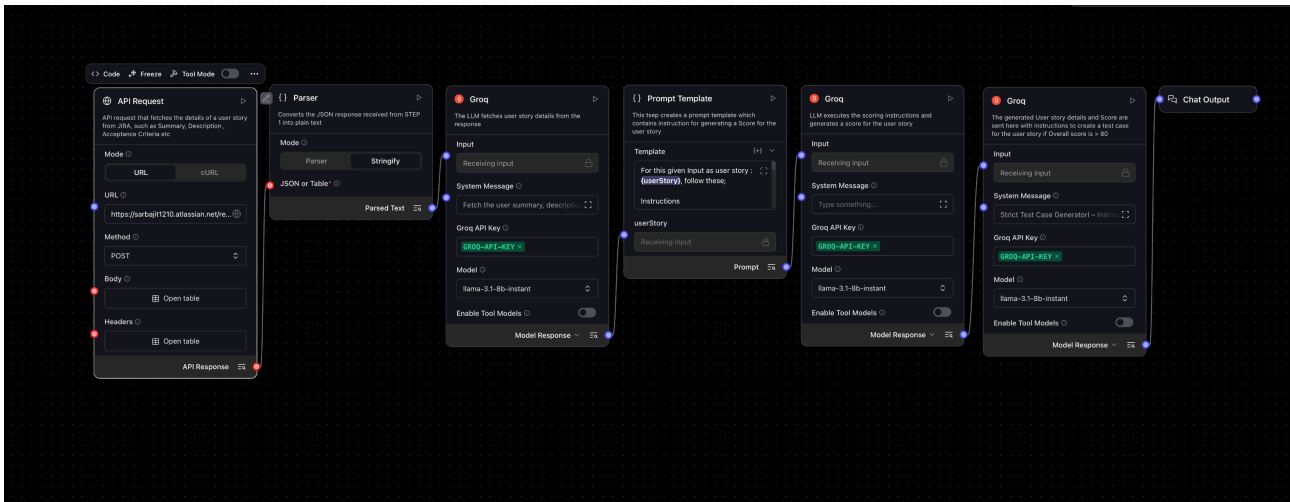

The Agent contains 7 components

- The first component is an API request component that connects to JIRA and fetches user story details - key, summary, acceptance criteria, description, status, reporter

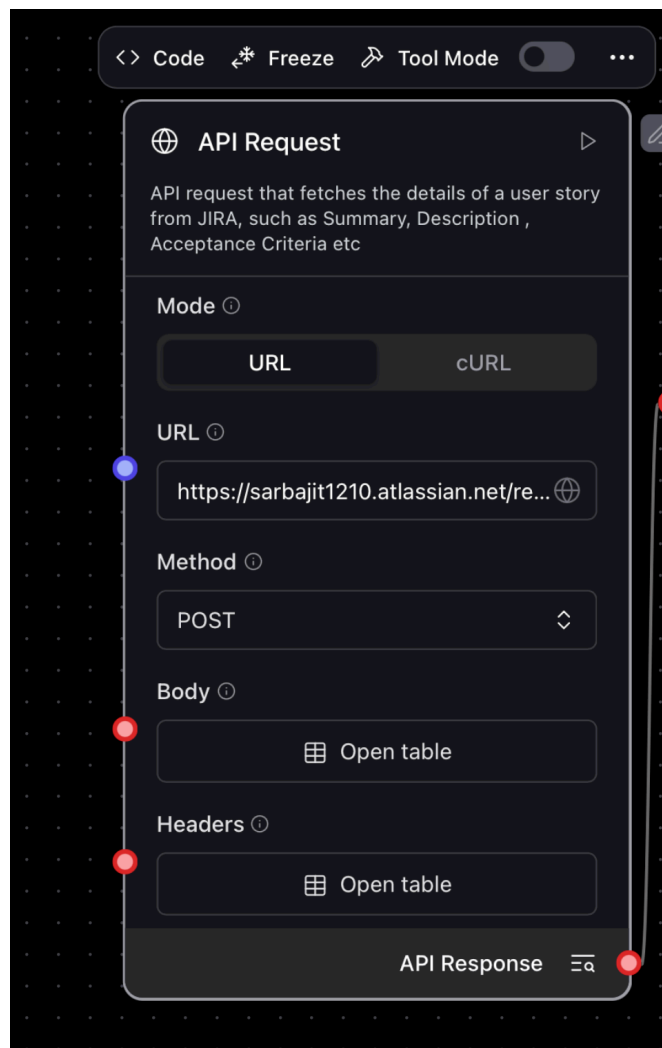

Request Body contains two inputs - Story Id and fields to fetch

The screenshot shows a 'Body' configuration window with a title bar and a close button. Below the title bar, it says 'The body to send with the request as a dictionary (for POST, PATCH, PUT)'. The main area is a table with two columns: 'Key' and 'Value'. There are two rows: one with 'key' and 'key="GEN-1"', and another with 'fields' and '["key", "summary", "customfield_10082", "description", "status", "reporter"]'. At the bottom, there are icons for adding, copying, deleting, and refreshing, along with a page indicator '1 to 2 of 2' and 'Page 1 of 1'. There are also 'Cancel' and 'Save' buttons.

Key	Value
key	key="GEN-1"
fields	["key", "summary", "customfield_10082", "description", "status", "reporter"]

b) The second component is the Parser component that parses the output of API request and converts plain text

The screenshot shows a 'Parser' component configuration window. It has a title bar with a play button. Below the title bar, it says 'Converts the JSON response received from STEP 1 into plain text'. There are two sections: 'Mode' with a dropdown menu showing 'Parser' and 'Stringify', and 'JSON or Table*' with a dropdown menu. At the bottom, there is a 'Parsed Text' label and a search icon.

Mode

Parser Stringify

JSON or Table*

Parsed Text


c) The third component is the GROQ LLM component that takes in the parsed output as a user message, and the instructions are passed as a system message. The model used is **llama-3.1-8b-instant**. In this component, the summary, description, and acceptance criteria are fetched from the parsed output

The screenshot shows the configuration for the 'Groq' component. At the top, a red circle with the number '9' is next to the title 'Groq'. Below the title, a description states: 'The LLM fetches user story details from the response'. The configuration is divided into several sections: 'Input' with a text box containing 'Receiving input'; 'System Message' with a text box containing 'Fetch the user summary, description'; 'Groq API Key' with a green button labeled 'GROQ-API-KEY' and a close icon; 'Model' with a dropdown menu showing 'llama-3.1-8b-instant'; and 'Enable Tool Models' with a toggle switch. At the bottom, there is a 'Model Response' label and a menu icon.


d) User story details are then sent to the Prompt Template, where the fetched story details are written up into a proper prompt in the ICEPOT template. This prompt provides instructions to generate a score for the user story based on Clarity, Completeness, Business Value Alignment, Testability, and Technical Feasibility

The screenshot shows the configuration for the 'Prompt Template' component. At the top, a curly brace icon is next to the title 'Prompt Template'. Below the title, a description states: 'This tstep creates a prompt template which contains instruction for generating a Score for the user story'. The configuration is divided into two main sections: 'Template' with a text box containing 'For this given Input as user story : {userStory}, follow these;' and 'Instructions' with a text box containing 'Instructions'; and 'userStory' with a text box containing 'Receiving input'. At the bottom, there is a 'Prompt' label and a menu icon.


e) The prompt is sent to another GROQ component, where the score is generated using the above ICEPOT prompt and **llama-3.1-8b-instant** model

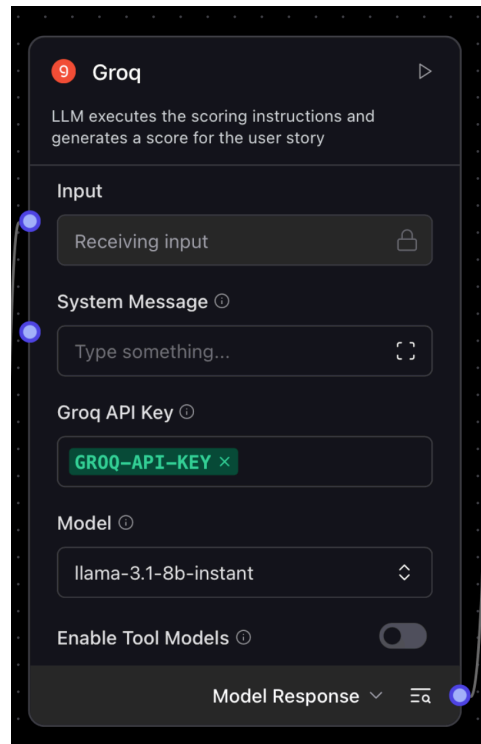

f) Next, another GROQ component is added, which is instructed not to generate test cases if the score is less than 80

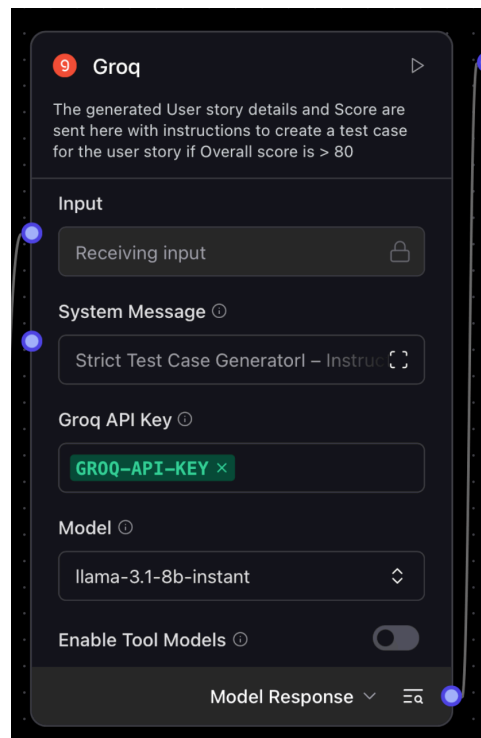

g) The last component is a chat output that generates the response output and shows in the chat as a response



PLAYGROUND RESPONSE

a) When the score is less than 80

User

Message empty.

 AI

✓ Finished in 3.7K | 3.7s

The user story score is not sufficient to generate test cases.

b) When the score is above 80

 AI

✓ Finished in 4.1K | 3.5s

TC_BT_001 Title: Verify successful consultant dashboard access with valid credentials Preconditions: User is a registered consultant with valid login credentials Steps:

1. Navigate to consultant dashboard login page
2. Enter valid consultant username and password
3. Click on login button
4. Verify successful dashboard access Expected Result: Consultant dashboard is displayed with relevant data

TC_BT_002 Title: Test consultant dashboard access with invalid credentials Preconditions: User is a registered consultant with invalid login credentials Steps:

1. Navigate to consultant dashboard login page
2. Enter invalid consultant username and password
3. Click on login button
4. Verify error message for invalid credentials Expected Result: Error message is displayed indicating invalid credentials


TC_BT_003 Title: Verify consultant dashboard data display with valid inpatient data Preconditions: Inpatient data is valid and consultant has access to dashboard Steps:

1. Navigate to consultant dashboard
2. Verify display of inpatient data, including patient name, age, and medical history
3. Verify data integrity and accuracy
4. Verify data filtering and sorting functionality Expected Result: Inpatient data is displayed accurately and filtering/sorting functionality works as expected

TC_BT_004 Title: Test consultant dashboard data display with invalid inpatient data Preconditions: Inpatient data is invalid and consultant has access to dashboard Steps:


1. Navigate to consultant dashboard
2. Verify display of inpatient data with invalid values (e.g. empty fields, incorrect data types)
3. Verify error handling and data integrity checks

PDF READER

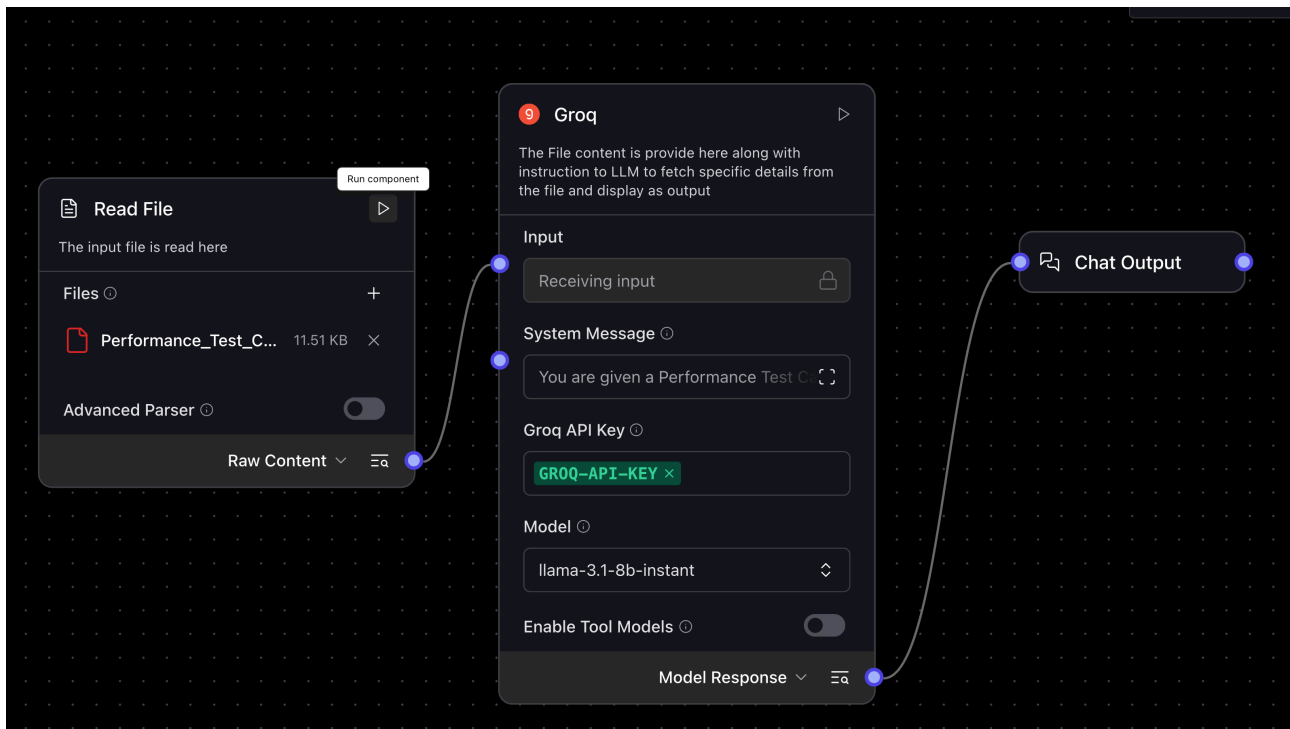


The Agnet contains 3 components


- The first component is a file reader component that takes in a file and parses the content of the file

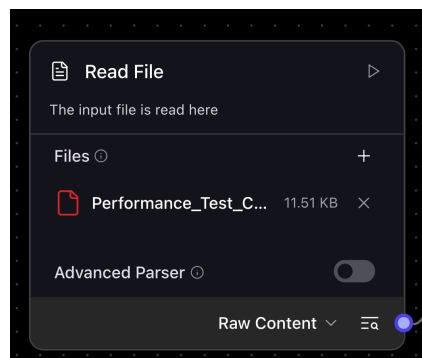

- The second component is the GROQ component that takes in the raw content of the file as user input and instructions via the system message

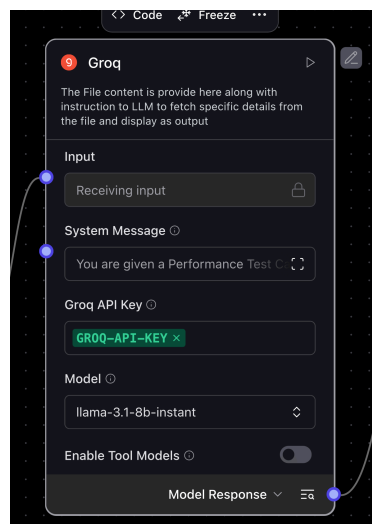

c) The third component is a chat output that generates the output in the chat session

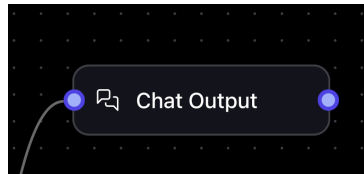

PLAYGROUND RESPONSE

The input file contains sections - **Success Criteria & SLA (Acceptance Thresholds)** and **Entry & Exit Criteria**

Total Planned Iterations / Transactions

4. Success Criteria & SLA (Acceptance Thresholds)

Define measurable pass/fail thresholds agreed with the business before execution. Percentiles (P90/P95/P99) are preferred over averages for response time.

Metric	Target / SLA	Threshold (Fail if)	Measured At
--------	--------------	---------------------	-------------

Performance Test Case Template · Confidential Page 1

Avg Response Time	< X ms	≥ X ms	Server / client
90th Percentile (P90)	< X ms	≥ X ms	Per transaction
95th Percentile (P95)	< X ms	≥ X ms	Per transaction
99th Percentile (P99)	< X ms	≥ X ms	Per transaction
Throughput	≥ X TPS / RPS	< X TPS	Aggregate
Error Rate	< X %	≥ X %	Aggregate
Concurrency Sustained	X users w/o degradation	degradation observed	Aggregate
CPU Utilisation	< X %	≥ X %	App / DB servers
Memory / Heap Utilisation	< X %	≥ X %	App / DB servers

5. Test Environment & Pre-requisites

Environment	
Application Build /	
Infrastructure / Integrations	Service setup, consumer key, access token, authentication party, logging & errors

9. Entry & Exit Criteria

Entry Criteria	Exit Criteria
- Environment stable, prod-like & signed off - Application build deployed & smoke-tested - Test data provisioned - Scripts recorded, correlated & validated (single-user baseline pass) - Monitoring & APM in place - SLA/NFRs agreed & approved	- Planned load & duration executed - All required metrics captured - Results analysed against SLA - Defects/bottlenecks logged - No P1/P2 issues open (or agreed exceptions) - Report reviewed & signed off

10. Assumptions, Dependencies & Risks

Assumptions	
-------------	--

The model has been instructed to fetch the **Metric** and **Measured At** columns from **Success Criteria & SLA (Acceptance Thresholds)** and list the entry and exit criteria in bullet points

After execution of the run below is the output

Extract Success Criteria & SLA metrics

Metric	Measured At
Avg Response Time	Server / client
90th Percentile (P90)	Per transaction
95th Percentile (P95)	Per transaction
99th Percentile (P99)	Per transaction
Throughput	Aggregate
Error Rate	Aggregate
Concurrency Sustained	Aggregate
CPU Utilisation	App / DB servers
Memory / Heap Utilisation	App / DB servers

List Entry & Exit Criteria

Entry Criteria:

- Environment stable, prod-like & signed off
- Application build deployed & smoke-tested
- Test data provisioned
- Scripts recorded, correlated & validated (single-user baseline pass)
- Monitoring & APM in place
- SLA/NFRs agreed & approved

Exit Criteria:

- Planned load & duration executed
- All required metrics captured
- Results analysed against SLA
- Defects/bottlenecks logged