


# TASK 1: USER STORY REVIEW AGENT - Customization of user parameters and executing workflow through Postman as an API

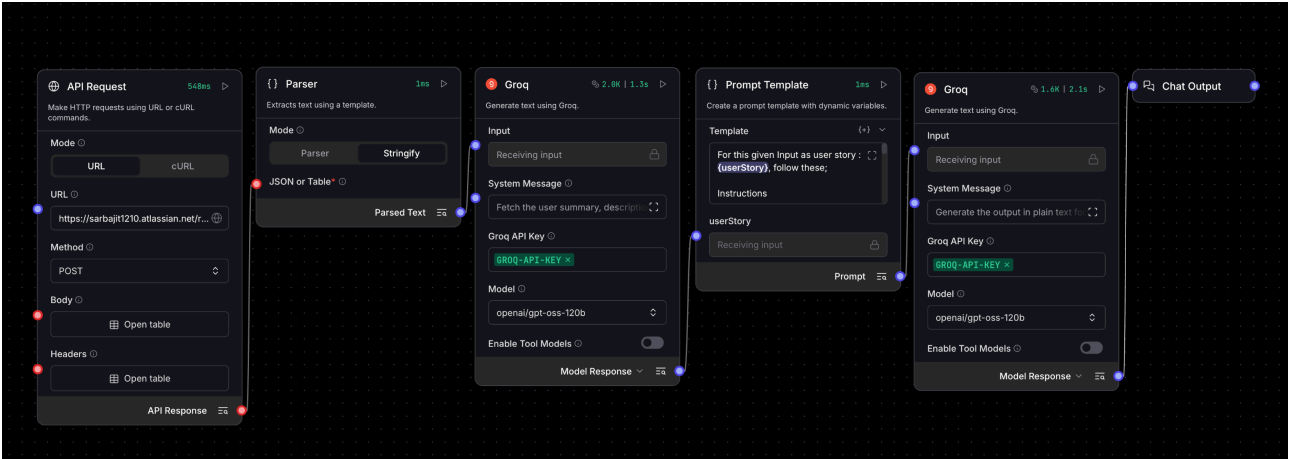

The above agent has been created to generate scores for user stories. Workflow parameters such as user prompt, model name, prompt template, etc., have been made customizable by exposing those parameters through the input schema

Input Schema

Endpoint Name

An alternative name to run the endpoint

Expose API

Select which component fields to expose as inputs in this flow's API schema.

Parser

| Expose Input                        | Field Name | Description                                                                                          | Current Value            |
|-------------------------------------|------------|------------------------------------------------------------------------------------------------------|--------------------------|
| <input checked="" type="checkbox"/> | Mode       | Convert into raw string instead of using a template.                                                 | Parser Stringify         |
| <input checked="" type="checkbox"/> | Separator  | String used to separate rows/items.                                                                  | Type something...        |
| <input checked="" type="checkbox"/> | Clean Data | Enable to clean the data by removing empty rows and lines in each cell of the DataFrame/Data object. | <input type="checkbox"/> |

Groq

| Expose Input                        | Field Name        | Description                                                                           | Current Value                       |
|-------------------------------------|-------------------|---------------------------------------------------------------------------------------|-------------------------------------|
| <input checked="" type="checkbox"/> | Input             |                                                                                       | Receiving input                     |
| <input checked="" type="checkbox"/> | System Message    | System message to pass to the model.                                                  | Fetch the user summary, description |
| <input checked="" type="checkbox"/> | Stream            | Stream the response from the model. Streaming works only in Chat.                     | <input type="checkbox"/>            |
| <input checked="" type="checkbox"/> | Groq API Key      | API key for the Groq API.                                                             | GROQ-API-KEY                        |
| <input checked="" type="checkbox"/> | Groq API Base     | Base URL path for API requests, leave blank if not using a proxy or service emulator. | https://api.groq.com                |
| <input checked="" type="checkbox"/> | Max Output Tokens | The maximum number of tokens to generate.                                             | Integer number                      |
| <input checked="" type="checkbox"/> | Temperature       | Run inference with this temperature. Must be in the closed interval [0.0, 1.0].       | 0.10                                |

temperature

temperature. must by in the closed interval [0.0, 1.0].

Precise

Creative

N

Number of chat completions to generate for each prompt. Note that the API may not return the full n completions if duplicates are generated.

0

Model

The name of the model to use. Add your Groq API key to access additional available models.

openai/gpt-oss-120b

Enable Tool Models

Select if you want to use models that can work with tools. If yes, only those models will be shown.

Prompt Template

| Expose Input | Field Name | Description | Current Value                                                                                                                                     |
|--------------|------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <div></div>  | Template   |             | <div>For this given Input as user story :<br/>{userStory}, follow these;<br/>Instructions<br/>You are an expert AI assistant specialized in</div> |

Use Double Brackets

Use {{variable}} syntax instead of {variable}.

userStory

Receiving input

Groq

| Expose Input | Field Name        | Description                                                                           | Current Value                                          |
|--------------|-------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------|
| <div></div>  | Input             |                                                                                       | <div>Receiving input</div> <div></div>                 |
| <div></div>  | System Message    | System message to pass to the model.                                                  | <div>Generate the output in plain text form: [ ]</div> |
| <div></div>  | Stream            | Stream the response from the model. Streaming works only in Chat.                     | <div></div>                                            |
| <div></div>  | Groq API Key      | API key for the Groq API.                                                             | <div>GROQ-API-KEY x</div>                              |
| <div></div>  | Groq API Base     | Base URL path for API requests, leave blank if not using a proxy or service emulator. | <div>https://api.groq.com</div> <div></div>            |
| <div></div>  | Max Output Tokens | The maximum number of tokens to generate.                                             | <div>Integer number</div> <div></div>                  |

Max Output Tokens

The maximum number of tokens to generate.

Integer number

Temperature

Run inference with this temperature. Must by in the closed interval [0.0, 1.0].

Precise

Creative

N

Number of chat completions to generate for each prompt. Note that the API may not return the full n completions if duplicates are generated.

0

Model

The name of the model to use. Add your Groq API key to access additional available models.

openai/gpt-oss-120b

Enable Tool Models

Select if you want to use models that can work with tools. If yes, only those models will be shown.

Chat Output

| Expose Input | Field Name | Description | Current Value |
|--------------|------------|-------------|---------------|
|--------------|------------|-------------|---------------|

Chat Output

| Expose Input | Field Name       | Description                                                                                         | Current Value            |
|--------------|------------------|-----------------------------------------------------------------------------------------------------|--------------------------|
|              | Store Messages   | Store the message in the history.                                                                   | <input type="checkbox"/> |
|              | Sender Type      | Type of sender.                                                                                     | Machine                  |
|              | Sender Name      | Name of the sender.                                                                                 | AI                       |
|              | Session ID       | The session ID of the chat. If empty, the current session ID parameter will be used.                | Type something...        |
|              | Context ID       | The session ID of the chat. If empty, the current session ID parameter will be used.                |                          |
|              | Data Template    | Template to convert Data to Text. If left empty, it will be dynamically set to the Data's text key. | {text}                   |
|              | Basic Clean Data | Whether to clean data before converting to string.                                                  | <input type="checkbox"/> |

API Request

| Expose Input | Field Name       | Description                                                                                                                                                        | Current Value                              |
|--------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
|              | Mode             | Enable cURL mode to populate fields from a cURL command.                                                                                                           | <div>URL</div> <div>cURL</div>             |
|              | URL              | Enter the URL for the request.                                                                                                                                     | https://sarbajit1210.atlassian.net/rest... |
|              | Method           | The HTTP method to use.                                                                                                                                            | POST                                       |
|              | Body             | The body to send with the request as a dictionary (for POST, PATCH, PUT).                                                                                          | Open table                                 |
|              | Headers          | The headers to send with the request as a dictionary (for POST, PATCH, PUT).                                                                                       |                                            |
|              | Timeout          | The timeout to use for the request.                                                                                                                                | 30                                         |
|              | Follow Redirects | Whether to follow HTTP redirects. WARNING: Enabling redirects may allow SSRF bypass attacks where a public URL redirects to internal resources. Only enable if you | <input type="checkbox"/>                   |

The cURL of the workflow is copied from API access section

</> API access

Input Schema (4)

×

API access requires an API key. You can [create an API key](#) in settings.

Python

JavaScript

cURL

macOS/Linux

Windows

```

1 curl --request POST \
2   --url 'http://localhost:7860/api/v1/run/e7ac85bb-b9c2-450d-a93a-1a4ed9dbf155?stream=false' \
3   --header 'Content-Type: application/json' \
4   --header 'x-api-key: YOUR_API_KEY_HERE' \
5   --data '{
6     "output_type": "chat",
7     "input_type": "text",
8     "input_value": "hello world!",
9     "tweaks": {
10      "ParserComponent-RPxAe": {
11        "mode": "Stringify",
12        "clean_data": true
13      },
14      "GrogModel-BUNgc": {
15        "base_url": "https://api.groq.com",
16        "model_name": "openai/gpt-oss-120b",
17        "system_message": "Fetch the user summary, description, and acceptance criteria only text"
18      },
19      "Prompt Template-rycjo": {
20        "template": "For this given Input as user story : {userStory}, follow these:\n\nInstructions\n\nYou are an expert AI assistant
21      },
22      "GrogModel-900rN": {
23        "model_name": "openai/gpt-oss-120b",

```

The API is configured in Postman by providing the cURL and updating the Langflow API key under headers

Output from Postman

```
12      "text_key": "text",
13      "data": {
14        "timestamp": "2026-07-17 19:26:36.088001 UTC",
15        "sender": "Machine",
16        "sender_name": "AI",
17        "session_id": "YOUR_SESSION_ID_HERE",
18        "context_id": "",
19        "text": "Parameter\tDescription\tScore (out of 20)\nClarity\tThe story is vague; the role, purpose, and\nexpected outcomes are not clearly defined.\t10\nCompleteness\tAcceptance criteria are minimal,\nlacking preconditions, performance metrics, and data scope.\t8\nBusiness Value Alignment\tProvides a\ngeneric dashboard concept but does not articulate specific healthcare benefits (e.g., patient safety,\nworkflow efficiency).\t14\nTestability\tInsufficient detail to derive concrete test cases; no\nmeasurable criteria or edge-case handling.\t10\nTechnical Feasibility\tConcept is feasible but\nmissing integration points, security considerations, and performance constraints.\t13\nOverall\nScore: 55 / 100\nImprovement Areas:\n- Clarify the user role and intent.\n- Expand acceptance\ncriteria with concrete, measurable conditions.\n- Explicitly link the dashboard to tangible\nhealthcare value (e.g., faster clinical decision-making, reduced LOS).\n- Add preconditions,\nperformance targets, and security requirements to enable testability.\n- Detail technical integration\npoints (EHR, HL7 feeds) and compliance constraints (HIPAA, PoPIA).\nRecommendations for\nImprovement:\n1. **Rewrite the story** using the \"As [role] I want [feature] so that [benefit]\"\nformat, e.g., \"As a clinical consultant, I want to view a real-time inpatient dashboard so that I can\nquickly assess patient status and prioritize care.\"\n2. **Specify data elements** to be shown\n(vitals, diagnosis, LOS, alerts) and the type of visualizations (charts, heat maps).\n3. **Define\nacceptance criteria** with measurable outcomes, such as:\n- User must be authenticated and have\nthe \"Consultant\" role.\n- Dashboard loads within 2 seconds for ≤500 concurrent users.\n- All\npatient identifiers are masked according to HIPAA/PoPIA.\n- Visualizations update in real time\nwhen source EHR data changes.\n4. **Add preconditions** (e.g., user logged into the hospital network,\npatient data feed active) and error-handling scenarios (e.g., display \"Data unavailable\" message if\nintegration fails).\n5. **Address technical constraints**:\nmention required APIs (FHIR/HL7), data\nencryption, and compliance testing.\nImplementing these changes will raise clarity, completeness,\ntestability, and alignment with business value, resulting in a higher overall quality score.",
20      "files": [],
21      "error": false,
22      "edit": false,
23      "properties": {
24        "text_color": null,
25        "background_color": null,
26        "edited": false,
27        "source": {
```

Output from Playground

 AI

✓ Finished in 3.8K | 6.7s

Parameter Description Score (out of 20) Clarity The story is vague ("consultant dashboard my inpatients") and lacks detail about who the consultant is, what specific information is needed, and how it will be used. 10 Completeness Acceptance criteria are minimal; no pre-conditions, data definitions, performance thresholds, or security requirements are provided. 8 Business Value Alignment Provides a generic benefit of "relevant data and visualizations," but does not tie to concrete healthcare outcomes such as patient safety, operational efficiency, or regulatory compliance. 14 Testability Only a high-level "display correctly without delay" criterion is given, making it difficult for QA to create precise test cases or measurable performance tests. 12 Technical Feasibility Conceptually feasible within an EHR/dashboard context, but missing details on data sources, integration points, and compliance constraints that could affect implementation. 15

Overall Score: 59 / 100

Improvement Areas:

- Clarify the user role, purpose, and exact data needed on the dashboard.
- Expand acceptance criteria with concrete pre-conditions, data elements, visualisation types, performance metrics, and security/compliance checks.
- Explicitly link the dashboard to measurable business value (e.g., reduced length of stay, faster clinical decision-making, compliance reporting).
- Provide testable conditions (e.g., response time < 2 seconds, data accuracy ≥ 99 %).
- Outline technical constraints such as EHR integration standards (HL7/FHIR), role-based access control, and audit logging.


Recommendations for Improvement:

1. **Rewrite the story** using the "As [role] I want [action] so that [benefit]" format, e.g.,  
*As a clinical consultant, I want to view a real-time dashboard of my assigned in-patients, showing current vitals, pending orders, and discharge readiness, so that I can prioritize care and improve patient flow.*
2. **Define acceptance criteria** with measurable items:
  - Given a consultant with valid HIPAA-compliant credentials, when they access the "My In-Patients" dashboard, the system displays a list of patients assigned to them within 2 seconds.

Run Flow

Add a [Chat Input](#) component to your flow to send messages.

# TASK 2: PDF FILE EXTRACTOR - Customization of user parameters and executing workflow through Postman as an API

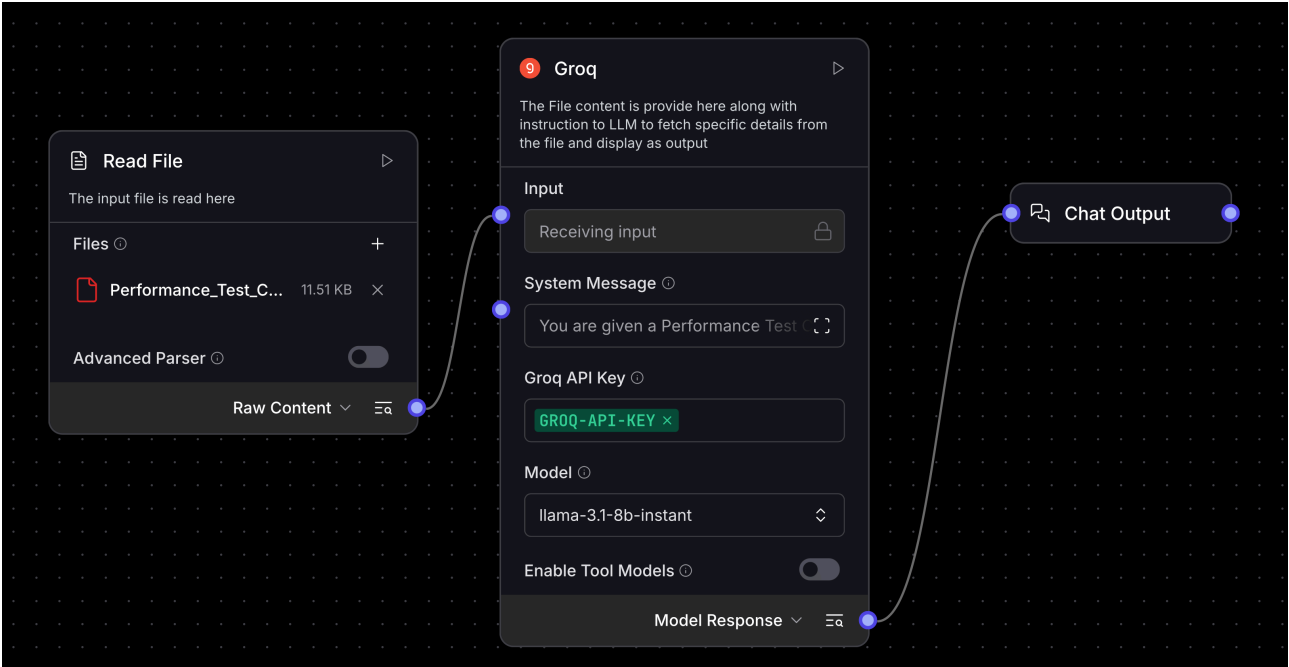

The above agent is designed to extract text from a PDF and display it as output. Certain workflow parameters, such as model and user prompt, have been exposed using the input schema so that these parameters can be customized in the API call

**Input Schema**

Endpoint Name

An alternative name to run the endpoint

**Expose API**

Select which component fields to expose as inputs in this flow's API schema.

| Expose Input                                                                        | Field Name                          | Description                                                                                                                                                                                                                                                                                                    | Current Value                                                                                                        |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
|  | Storage Location                    | Choose where to read the file from.                                                                                                                                                                                                                                                                            | Local                                                                                                                |
|  | Files                               | Supported file extensions: csv, json, pdf, txt, md, mdx, yaml, yml, xml, html, htm, docx, py, sh, sql, js, ts, tsx, adoc, asciidoc, asc, bmp, dotx, dotm, docm, jpg, jpeg, png, potx, ppsx, pptm, potm, ppsm, pptx, tiff, xls,xlsx, xhtml, webp; optionally bundled in file extensions: zip, tar, tgz, bz2, gz |  Performance_Test_Cas... 11.51 KB |
|  | Separator                           | Specify the separator to use between multiple outputs in Message format.                                                                                                                                                                                                                                       | Type something...                                                                                                    |
|  | Silent Errors                       | If true, errors will not raise an exception.                                                                                                                                                                                                                                                                   | <input type="checkbox"/>                                                                                             |
|  | Delete Server File After Processing | If true, the Server File Path will be deleted after processing.                                                                                                                                                                                                                                                | <input type="checkbox"/>                                                                                             |
|  | Ignore Unsupported                  | If true, files with unsupported extensions will not be                                                                                                                                                                                                                                                         | <input type="checkbox"/>                                                                                             |

Ignore Unspecified Files

If true, Data with no 'file\_path' property will be ignored.

Advanced Parser

Enable advanced document processing and export with Docling for PDFs, images, and office documents. Note that advanced document processing can consume significant resources.

[Deprecated] Use Multithreading

Set 'Processing Concurrency' greater than 1 to enable multithreading.

Processing Concurrency

When multiple files are being processed, the number of files to process concurrently.

1

+

-

Groq

Expose Input

Field Name

Description

Current Value

Input

Receiving input

System Message

System message to pass to the model.

You are given a Performance Test Case

Stream

Stream the response from the model. Streaming works only in Chat.

Groq API Key

API key for the Groq API.

GROQ-API-KEY

Groq API Base

Base URL path for API requests, leave blank if not using a proxy or service emulator.

https://api.groq.com

Max Output Tokens

The maximum number of tokens to generate.

Integer number

Temperature

Run inference with this temperature. Must be in the closed interval [0.0, 1.0].

0.10

N

Number of chat completions to generate for each prompt. Note that the API may not return the full n completions if duplicates are generated.

0

Model

The name of the model to use. Add your Groq API key to access additional available models.

llama-3.1-8b-instant

Select if you want to use

Chat Output

Expose Input

Field Name

Description

Current Value

Store Messages

Store the message in the history.

Sender Type

Type of sender.

Machine

Sender Name

Name of the sender.

AI

Session ID

The session ID of the chat. If empty, the current session ID parameter will be used.

Type something...

Context ID

The context ID of the chat. Adds an extra layer to the local memory.

Type something...

Data Template


Template to convert Data to Text. If left empty, it will be dynamically set to the Data's

{text}

Basic Clean Data

Whether to clean data before converting to string.


The cURL of the workflow is copied from API access section

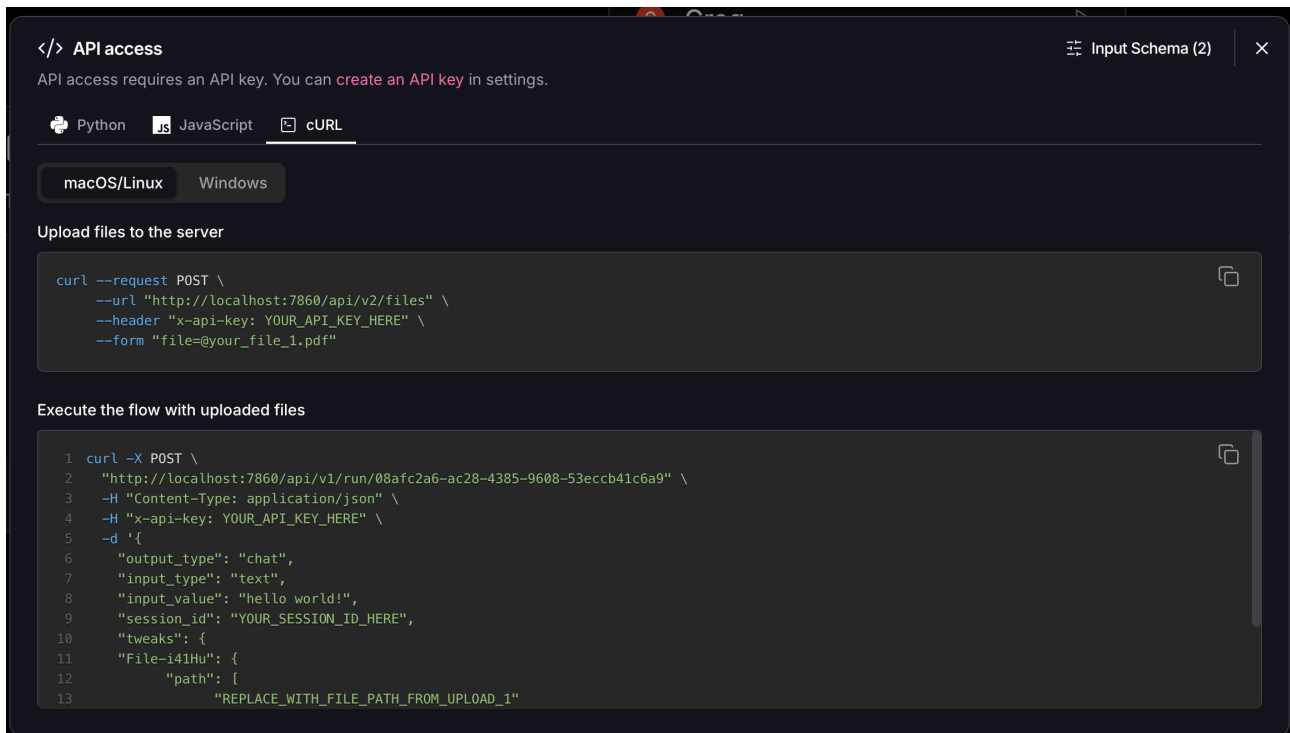


The API is configured in Postman by providing the cURL and updating the Langflow API key under headers

## Output from Postman

There are two API calls. Output of the first call is a PDF file path

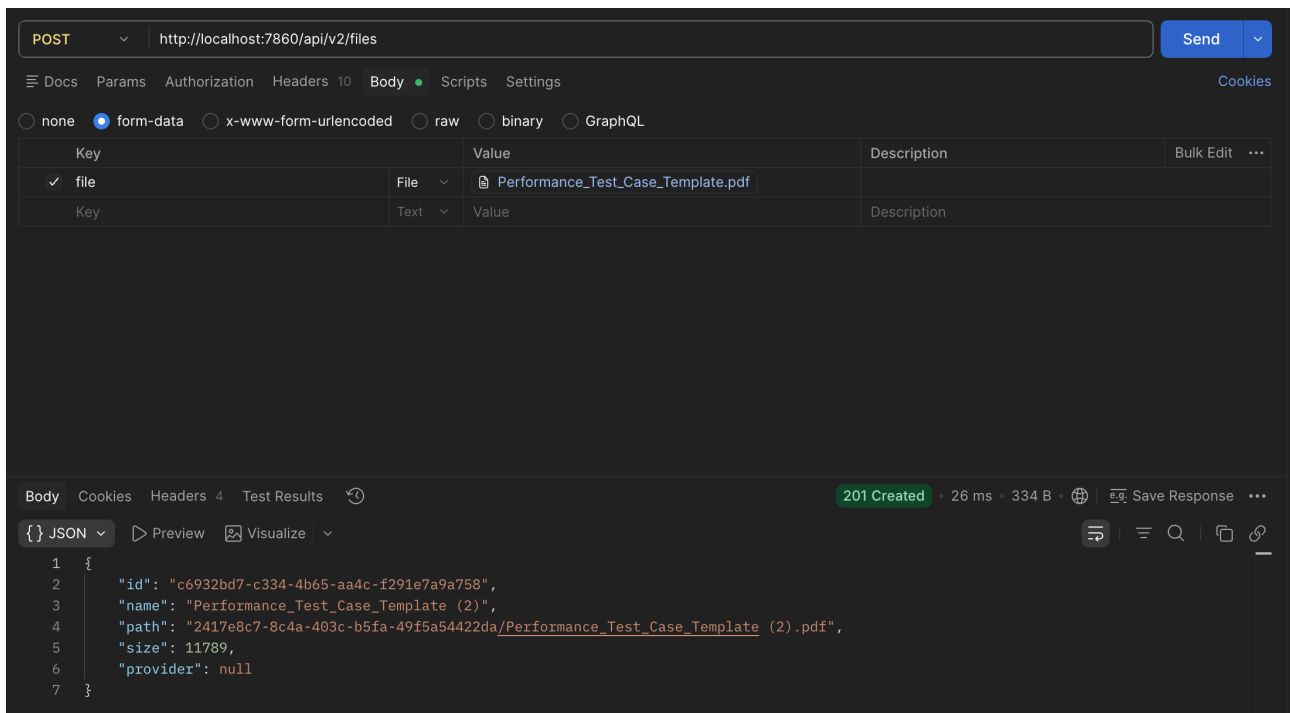

The file path is passed into the body of the second request under the path parameter

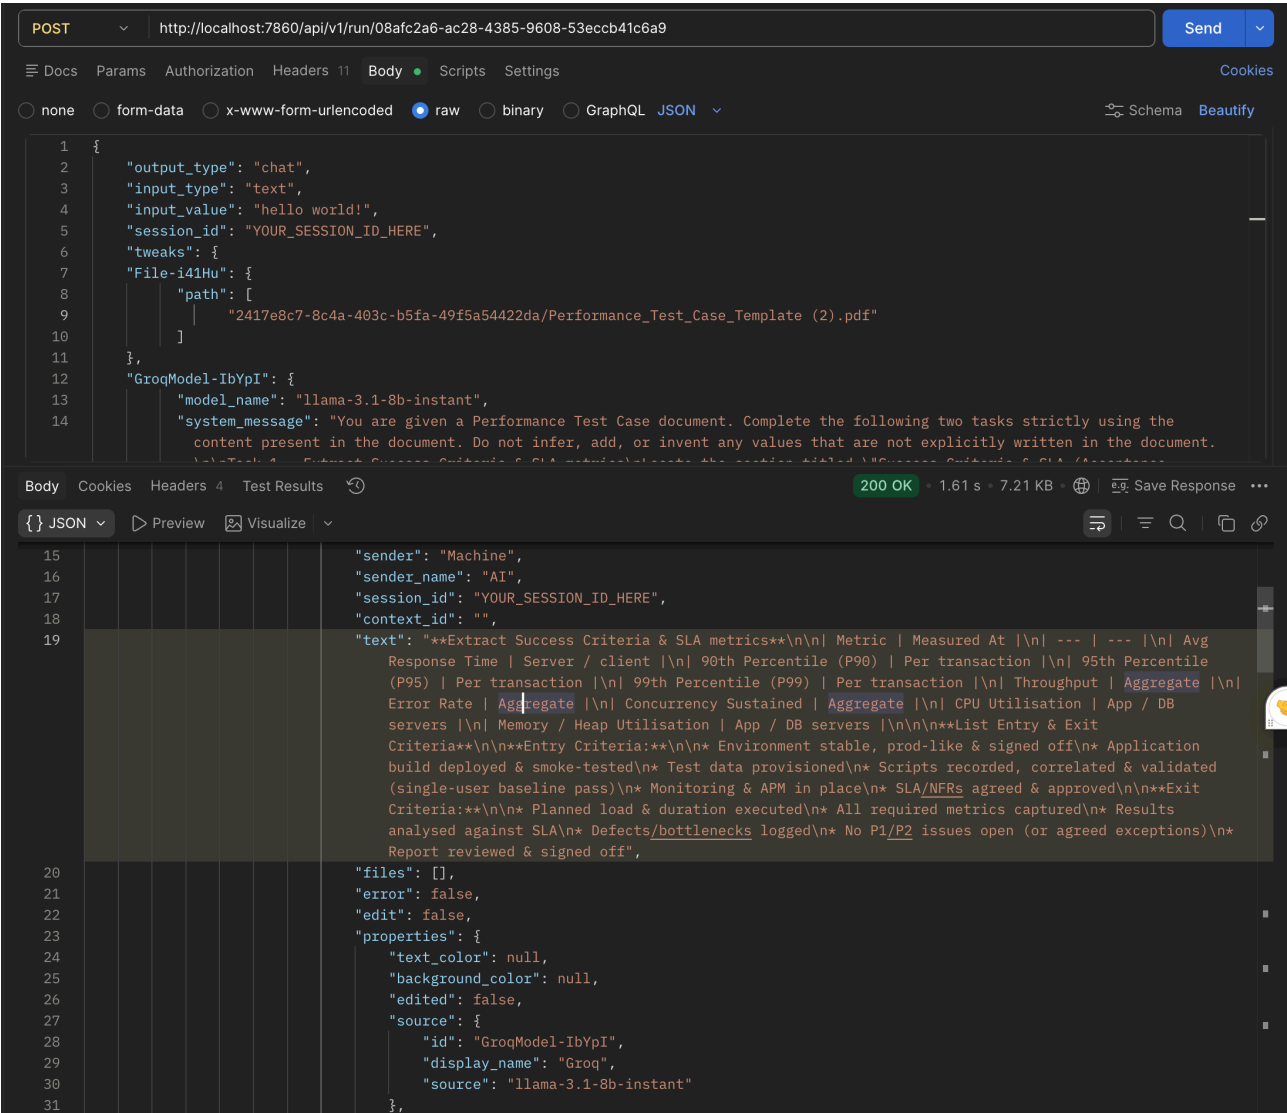

### Output from Playground

Finished in 1.8K | 0.7s

#### Extract Success Criteria & SLA metrics

| Metric                    | Measured At      |
|---------------------------|------------------|
| Avg Response Time         | Server / client  |
| 90th Percentile (P90)     | Per transaction  |
| 95th Percentile (P95)     | Per transaction  |
| 99th Percentile (P99)     | Per transaction  |
| Throughput                | Aggregate        |
| Error Rate                | Aggregate        |
| Concurrency Sustained     | Aggregate        |
| CPU Utilisation           | App / DB servers |
| Memory / Heap Utilisation | App / DB servers |

#### List Entry & Exit Criteria

**Entry Criteria** Environment stable, prod-like & signed off Application build deployed & smoke-tested Test data provisioned Scripts recorded, correlated & validated (single-user baseline pass) Monitoring & APM in place SLA/NFRs agreed & approved

**Exit Criteria** Planned load & duration executed All required metrics captured Results analysed against SLA Defects/bottlenecks logged No P1/P2 issues open (or agreed exceptions) Report reviewed & signed off