

Static PTX Metrics Track Structural Kernel Regressions but Miss Semantic Ones

Dipankar Sarkar^[0000–0001–5431–6367]

Arizona State University, USA
dsarkar3@asu.edu

Abstract. We pair each GPU kernel’s static PTX metrics (registers, spills, instruction count) with CUDA-event-timed runtime on five GPU classes: RTX 3060, A10, L40S, A100 SXM4, and H100 NVL. In this corpus and toolchain the static and measured signals separate cleanly along one axis. Per-pair Δregs and Δinstrs are identical across all five GPUs for any given (correct, buggy) pair. Measured $\Delta\text{perf}\%$ is not. Structural bugs that change the kernel’s work are unambiguous in the static signal. The `gelu.triton.buggy` variant, which drops a leading 0.5 factor, removes 8 instructions and 8 registers. The corresponding measured $\Delta\text{perf}\%$ on RTX 3060 is +3.2%, within the run-to-run noise band at the sub-millisecond scale these corpus kernels occupy. Semantic bugs that swap one constant for another are invisible to the static signal. The `softmax.triton.buggy` variant, which substitutes `other=0.0` for `-inf` on the masked load, compiles to byte-identical PTX. The paper’s bounded claim is that, for this corpus and toolchain, a static-PTX delta gate is a portable pre-filter that separates structural from semantic changes; measured runtime deltas at this scale are hardware- and noise-sensitive and are not a substitute.

Keywords: GPU compilation · static analysis · PTX · performance regression · CI gating

1 Introduction

CI gating on GPU kernel changes is expensive. Running every variant on real hardware costs seconds to minutes per test. A long-standing folk view is that static PTX metrics (register count, spills to local memory, instruction count) are leading indicators of measured GPU performance and can therefore gate CI without hardware execution. We test the claim on a controlled corpus.

The claim is a bounded one. Static PTX metrics track structural changes to the kernel’s compiled work envelope. In this corpus, structural bugs produce nonzero Δregs or Δinstrs , while semantic-only constant changes produce zero static delta. Measured runtime deltas are a different signal: at the sub-millisecond scale of these kernels, CUDA-event timing is dominated by launch and host variance, so measured $\Delta\text{perf}\%$ does not reliably separate the two bug classes without larger shapes or per-architecture calibration. We give a measured example

of each. The cross-architecture sweep in Section 4.1 strengthens the portability side of the static claim. The static signal is identical across five GPU classes for the same kernel because it is determined at compile time.

2 Related Work

GPU performance modeling. The literature on GPU performance prediction from compiler-level information is rich [1,2]. The dominant approach uses a microarchitectural model (occupancy, memory bandwidth, instruction mix) to predict runtime. Correlation with measured performance is typically used to validate the model.

Register pressure and spills. When register pressure exceeds the SM’s per-thread limit, ptxas spills to local memory backed by global DRAM [3,4]. This causes correctness-preserving but performance-destroying load and store traffic. Static spill detection through `ld.local` and `st.local` patterns in PTX is the typical CI gate.

Triton-level optimisation. Triton [6] compiles Python-level kernel descriptions to PTX with autotuning over `BLOCK_M`, `BLOCK_N`, and `num_warps`. Library-level wrappers further trade off register pressure against tiling.

The gap. No prior work, to our knowledge, controls for kernel semantics while varying static PTX metrics, and measures the regression-prediction correlation as a function of bug class. We do.

3 Method

3.1 Static metrics

`crates/gpuemu-daemon/src/artifact.rs` parses PTX text and reports five metrics.

- `register_count`: total number of declared registers across all bank types.
- `spill_count`: count of `ld.local` and `st.local` mnemonics, used as a proxy for spill traffic.
- `local_memory_bytes`: declared `.local` allocation sizes.
- `instruction_count`: count of indented PTX source lines whose first non-whitespace token is a lowercase mnemonic with optional `.-`modifiers (e.g. `add.f32`, `mov.b32`). Labels, `.-`-prefixed directives, comments, `.entry/``.func` headers, and predicate-prefixed lines (`@%p1 ...`) do not contribute. The same counter is applied uniformly across all kernel pairs.
- `patterns_found`: the set of instruction mnemonics for required and forbidden-pattern policies.

The analyser is invoked through the daemon’s `LintKernel` RPC. The same artifact-analyser code is shared across all `gpuemu` use cases.

3.2 Measured perf

`drivers/_capture.py` wraps a kernel launch with CUDA-event timing and a fixed warmup and iteration count. It reports `ms_min`, `ms_median`, and `ms_mean`. Device identity (name, SM count, capability) is also recorded.

3.3 The pairing protocol

For each Triton kernel in the corpus, the P4 driver (`drivers/p4_artifacts.py`) performs five steps.

1. Clear the Triton cache. The produced PTX is then attributable to this kernel only.
2. Run `kernel.run(inputs)` on a representative shape to populate the cache.
3. Send each emitted `.ptx` to the daemon’s `lint_kernel` RPC for static metrics.
4. Wrap a second invocation with a CUDA-event timer (`_capture.time_kernel`, warmup 5, iters 50) for measured perf.
5. Record one row per (kernel, ptx) with five static fields (`register_count`, `spill_count`, `local_memory_bytes`, `instruction_count`, `violations`) and two measured-perf fields (`ms_min`, `ms_median`).

`analysis/p4_correlation.py` then pairs each correct kernel with its buggy variant (by naming convention) and reports Δregs , Δinstrs , $\Delta\text{ms_median}$, and $\Delta\text{perf}\%$.

3.4 Assumptions

The empirical claim depends on four assumptions.

1. Triton kernels are compiled fresh per run. Step 1 (cache clear) removes any cross-run contamination of the PTX under test.
2. The representative shape per kernel is fixed for the perf timing. Per-shape perf signatures are not measured here and are a noted extension in Section 6.
3. The static metrics measured (registers, spills, instructions, local memory) are an exhaustive enough proxy for the kernel’s work envelope at the granularity we test. We do not measure occupancy directly.
4. The 9 paired correct and buggy variants represent both structural and semantic LLM-style bugs. The companion paper [5] establishes the bug taxonomy and the seeded transcription errors.

4 Evaluation

Setup. vast.ai RTX 3060 for the single-GPU demonstration below, image `pytorch/pytorch:2.4.0-cuda12.4-cudnn9-devel`. The same driver and the same RTX 3060 run are then joined with four additional GPU classes (A10, L40S, A100 SXM4, H100 NVL) for the cross-architecture analysis in Section 4.1.

Table 1. Per-kernel static metrics and measured perf on RTX 3060, selected entries.

kernel	regs	spills	instrs	ms_median
gelu_triton	232	0	205	0.099
gelu_triton_buggy	224	0	197	0.102
silu_triton	136	0	109	0.097
silu_triton_buggy	135	0	108	0.096
rmsnorm_triton	93	0	86	0.102
rmsnorm_triton_buggy	92	0	85	0.101
softmax_triton	130	0	116	0.103
softmax_triton_buggy	130	0	116	0.101

The canonical run identifier on RTX 3060 is `run-20260611-142511-884321`; the other four are listed in Table 5.

Static and perf per kernel on RTX 3060 are reported in Table 1 for a selected subset.

Headline: paired diffs (buggy minus correct) are reported in Table 2.

Table 2. Paired diffs on RTX 3060, run 884321. Static Δ separates structural from semantic; measured $\Delta\text{perf}\%$ stays within $\pm 5\%$ for every pair.

pair	Δregs	Δinstrs	$\Delta\text{ms_median}$	$\Delta\text{perf}\%$	bug class
gelu_triton $\rightarrow$ gelu_triton_buggy	-8	-8	+0.0031	+3.2%	structural (drops 0.5 $\times$ multiply)
matmul_triton $\rightarrow$ matmul_triton_buggy	-15	-8	-0.0034	-2.8%	structural (<code>acc=</code> vs <code>acc+=</code>)
l2norm_triton $\rightarrow$ l2norm_triton_buggy	-1	-1	+0.0004	+0.3%	structural (drops sqrt)
silu_triton $\rightarrow$ silu_triton_buggy	-1	-1	-0.0005	-0.6%	micro-structural
rmsnorm_triton $\rightarrow$ rmsnorm_triton_buggy	-1	-1	-0.0007	-0.7%	micro-structural
leaky_relu_triton $\rightarrow$ leaky_relu_triton_buggy	0	0	+0.0041	+4.2%	semantic (constant only)
softmax_triton $\rightarrow$ softmax_triton_buggy	0	0	-0.0023	-2.2%	semantic (load-mask constant)

The pattern is clean on the static axis, noisy on the perf axis.

Structural bugs (gelu missing 0.5, matmul `acc=` vs `acc+=`, l2norm and rmsnorm missing `sqrt`, silu β confusion) all show nonzero Δregs and Δinstrs . A simple static-delta CI gate ($|\Delta\text{regs}| \geq 1 \Rightarrow \text{flag}$) catches all of them. Measured $\Delta\text{perf}\%$ on the same pairs ranges from -2.8% to $+3.2\%$, with no consistent sign: at the sub-millisecond scale these kernels run, per-launch variance is the dominant component.

Semantic-only bugs (softmax `other=0.0` vs `-inf`; leaky_relu wrong α constant) compile to byte-identical PTX (softmax: 130 registers, 116 instructions, byte-equal `.ptx`). A static-delta gate is blind to them by construction. Their measured $\Delta\text{perf}\%$ (-2.2% and $+4.2\%$ respectively) sits in the same $\pm 5\%$ noise band as the structural pairs, which is why measured perf alone does not separate the two classes at this kernel scale.

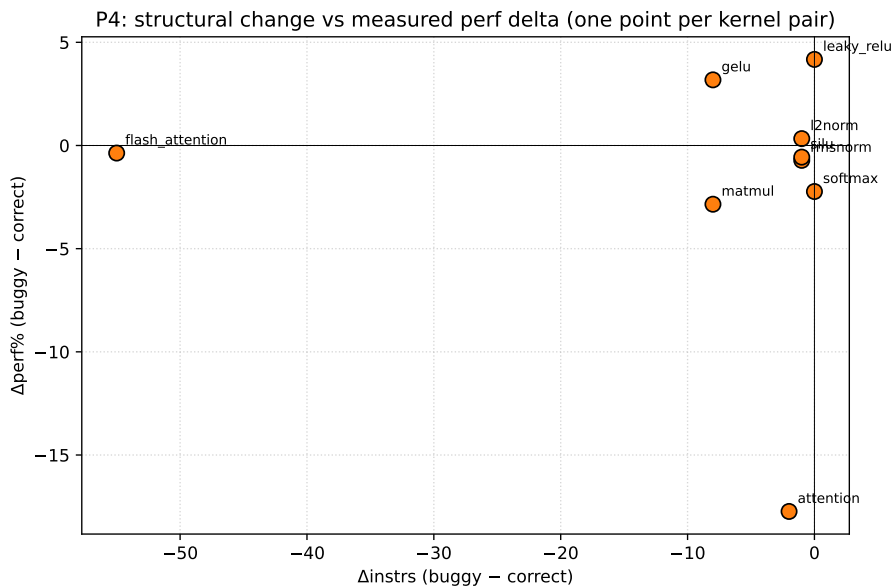


Fig. 1. Δinstrs vs $\Delta \text{perf\%}$ on RTX 3060, one point per (correct, buggy) pair across all nine. The x-axis separates the two bug classes cleanly; the y-axis does not.

4.1 Cross-architecture consistency

The single-GPU finding raises an obvious portability question. Does a static-PTX gate calibrated on RTX 3060 transfer to data-center GPUs? We re-ran the P4 driver on five GPU classes through the same vast.ai harness: RTX 3060 (sm_86), A10 (sm_86), L40S (sm_89), A100 SXM4 (sm_80), and H100 NVL (sm_90). The headline result is that static metrics are architecture-independent.

For each (correct, buggy) pair in this corpus, the Triton-emitted PTX text our analyser parses produced identical static deltas across all five GPU classes. The cross-GPU Δregs and Δinstrs table is therefore one column wide. This is a statement about the PTX text metrics captured by the gpuemu daemon’s artifact analyser, not a general theorem about ptxas register allocation or SASS-level resource usage across all targets. Table 3 reports it.

The static-gate verdict transfers cleanly. Anything that flags or passes on RTX 3060 flags or passes the same way on every other GPU class. The two semantic-bug pairs (`leaky_relu_triton_buggy`, `softmax_triton_buggy`) compile to identical PTX on all five GPUs and are therefore invisible to any static gate everywhere. This is the architecture-independent restatement of the main claim.

Measured $\Delta \text{perf\%}$ varies across architectures and is dominated by launch-overhead noise at the sub-millisecond scale. For completeness

Table 3. Cross-architecture static deltas. Identical across all five GPU classes.

pair	Δregs	Δinstrs	bug class
gelu.triton $\rightarrow$ gelu.triton.buggy	-8	-8	structural (drops $0.5\times$)
matmul.triton $\rightarrow$ matmul.triton.buggy	-15	-8	structural (<code>acc=</code> vs <code>acc+=</code>)
flash_attention.triton $\rightarrow$ flash_attention.triton.buggy	-36	-55	structural (drops <code>acc</code> $\cdot \alpha$ rescale)
attention.triton $\rightarrow$ attention.triton.buggy	-2	-2	structural (drops $1/\sqrt{D}$ scale)
l2norm.triton $\rightarrow$ l2norm.triton.buggy	-1	-1	structural (drops sqrt)
rmsnorm.triton $\rightarrow$ rmsnorm.triton.buggy	-1	-1	structural (drops sqrt)
silu.triton $\rightarrow$ silu.triton.buggy	-1	-1	micro-structural
leaky_relu.triton $\rightarrow$ leaky_relu.triton.buggy	0	0	semantic (constant only)
softmax.triton $\rightarrow$ softmax.triton.buggy	0	0	semantic (load-mask constant)

Table 4 reports the per-architecture $\Delta\text{perf}\%$. Figure 2 plots the same data on a divergent colormap so the A100 row’s variance is visible.

Table 4. Cross-architecture $\Delta\text{perf}\%$ per pair. Four architectures stay within $\pm 20\%$ of zero; A100 SXM4 is dominated by shared-host launch variance.

pair	RTX 3060	A10	L40S	A100 SXM4	H100 NVL
attention.triton $\rightarrow$.buggy	-17.7%	-19.2%	-0.0%	+89.0%	-3.9%
flash_attention.triton $\rightarrow$.buggy	-0.4%	+1.1%	-3.0%	+1.0%	+0.3%
gelu.triton $\rightarrow$.buggy	+3.2%	+0.2%	+9.4%	-50.0%	-0.8%
l2norm.triton $\rightarrow$.buggy	+0.3%	-1.0%	+8.1%	+6.0%	+18.4%
leaky_relu.triton $\rightarrow$.buggy	+4.2%	-0.2%	-12.5%	+89.7%	-8.1%
matmul.triton $\rightarrow$.buggy	-2.8%	+2.2%	+3.1%	-41.2%	+0.6%
rmsnorm.triton $\rightarrow$.buggy	-0.7%	-0.1%	+2.7%	+70.5%	+0.4%
silu.triton $\rightarrow$.buggy	-0.6%	+0.3%	+0.5%	+122.2%	-5.1%
softmax.triton $\rightarrow$.buggy	-2.2%	+0.2%	-0.9%	+92.3%	+3.1%

The operational takeaway is that static-PTX gating is the portable signal. Δregs and Δinstrs are architecture-independent, decided at compile time, and indistinguishable across the five GPU classes for the same kernel. Measured $\Delta\text{perf}\%$ is not portable at the sub-millisecond scale these kernels occupy, so a perf-based gate calibrated on one GPU class cannot be assumed to threshold meaningfully on another without per-architecture re-calibration.

The five run records are listed in Table 5. Each row is independently replayable from the public `gpuemu` repository with `python3 scripts/replay_from_b2.py --run-id <id>`, which fetches `results.jsonl` and `summary.json` from the B2 bucket and re-runs the analysis scripts without requiring GPU access. The Backblaze path for each row is `gpuemu/<run-id>/{results.jsonl,summary.json}`.

5 Discussion

This is a bounded claim with concrete implications for CI design.

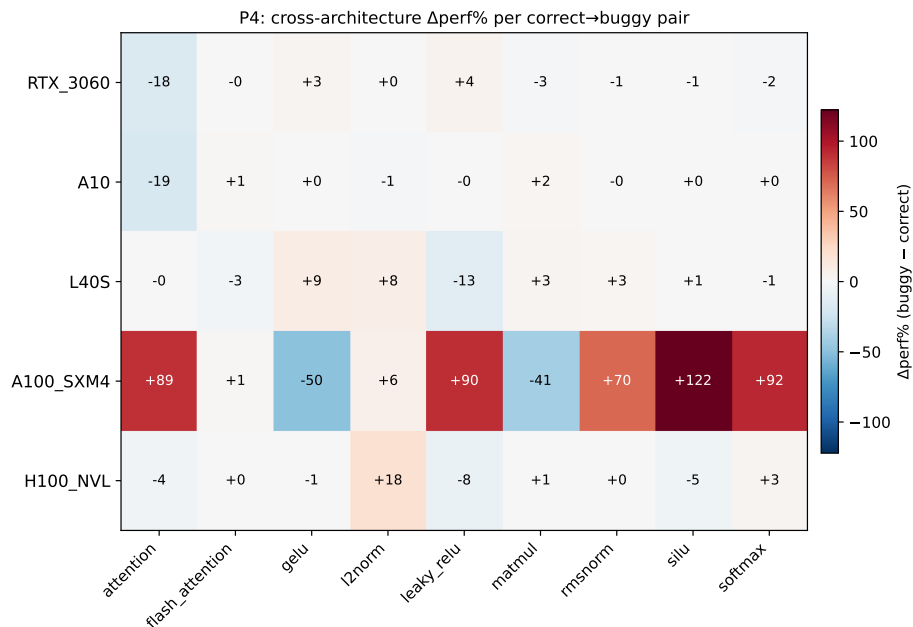


Fig. 2. Cross-architecture $\Delta\text{perf}\%$ per pair. Only the measured signal varies; static Δ is identical across all five GPUs.

A static-PTX-delta gate is a cheap useful pre-filter. It catches the structural bugs at zero hardware cost. It is useful at PR time before any GPU is provisioned.

It must not be the sole correctness gate. Semantic-only bugs slip through. These bugs are often the most pernicious because they preserve performance metrics. The fuzzing oracle from the companion paper [5] remains necessary.

The two methodologies are complementary, not competing. A strong CI pipeline runs both, with static gating as the fast filter and fuzzing as the deep check.

The observed pattern refines the long-standing folk model. Static instruction and register deltas are a useful indicator that the compiled kernel changed structurally, but they are not a reliable quantitative predictor of runtime at this kernel scale. Structural changes may be performance-relevant, but the measured effect can be masked by launch overhead and shared-host variance. Constant-only semantic bugs are worse for CI: they preserve both static metrics and performance-like signals, so they require an independent correctness oracle.

6 Limitations

The corpus has 9 paired correct and buggy variants. This is adequate for the dichotomy demonstration and for the cross-architecture portability check in Section 4.1, but insufficient for fitting a quantitative perf-prediction model.

Table 5. Run records on B2 bucket `sarkar-dipankar-research`, prefix `gpuemu/`.

GPU class	run id
RTX 3060	<code>run-20260611-142511-884321</code>
A10	<code>run-20260611-145820-13358e</code>
L40S	<code>run-20260611-144339-6247e5</code>
A100 SXM4	<code>run-20260611-144659-0378af</code>
H100 NVL	<code>run-20260611-145211-2c6308</code>

The static-metric portability finding is exact: the same PTX implies the same `register_count` and the same `instruction_count` regardless of GPU. The measured- $\Delta\text{perf}\%$ portability finding is the opposite. At the sub-millisecond scale these corpus kernels occupy, per-launch variance (particularly on shared-host SXM4 inventory) dominates the few-instruction differences. Strengthening $\Delta\text{perf}\%$ as a portable signal would require either longer-running kernels (larger shapes) or per-architecture re-calibration.

Perf timing uses a single representative shape per kernel. Perf varies by shape. A richer P4 sweep would parameterise over shape and produce a per-shape perf signature on each GPU class.

The default `ArtifactCheckConfig` threshold (`max_registers = 64`) flags every modern Triton kernel as `ExcessiveRegisters`. This is a configuration concern, not a research finding: the threshold is a left-over default that should be retuned per target before the static-PTX gate is enabled in CI.

7 Conclusion

Static PTX deltas track structural source changes in this corpus and toolchain. They are useful as a portable pre-filter for CI: kernels that skip work register a nonzero Δregs or Δinstrs , and kernels that swap one constant for another compile to identical PTX. Measured runtime deltas at the sub-millisecond scale these corpus kernels occupy remain hardware- and noise-sensitive: the same structural change registered -50% on A100 SXM4 and $+9.4\%$ on L40S in our cross-architecture sweep (Table 4). The cross-architecture sweep in Section 4.1 therefore strengthens only the static side. The static signal (Δregs , Δinstrs) for each pair in this corpus is identical across the five GPU classes we measured. A perf-based gate needs per-architecture calibration before it is used as anything more than a smoke check. The data supports an integrated CI design that runs both: cheap portable static checks at PR time, and fuzzing-based correctness checks [5] before merge.

Artefact. The corpus, the static-plus-perf driver (`p4.artifacts.py`), the correlation analysis (`p4.correlation.py`), and the `replay_from.b2.py` script that fetches each cited run record are bundled in the public `gpuemu-corpus` package at <https://github.com/sarkar-dipankar/gpuemu-corpus>. The validator

daemon and the artefact analyser are at <https://github.com/Skelf-Research/gpuemu>.

License. This preprint is released under CC-BY 4.0.

References

1. Arafa, Y., Badawy, A.A., Chennupati, G., Santhi, N., Eidenbenz, S.: Low overhead instruction latency characterization for NVIDIA GPGPUs. In: Proc. 2019 IEEE High Performance Extreme Computing Conf. (HPEC). pp. 1–8. IEEE (2019). <https://doi.org/10.1109/HPEC.2019.8916466>, <https://arxiv.org/abs/1905.08778>
2. Krolik, A., Verbrugge, C., Hendren, L.J.: rNdN: Fast query compilation for NVIDIA GPUs. ACM Trans. Archit. Code Optim. (TACO) **20**(3), 41:1–41:25 (2023). <https://doi.org/10.1145/3603503>, <https://dl.acm.org/doi/10.1145/3603503>
3. NVIDIA Corporation: CUDA compiler driver NVCC. NVIDIA Documentation. See `--ptxas-options` and the resource-usage (`registers`, `stack frame`, `spill stores/loads`) output. Supplementary discussion: <https://forums.developer.nvidia.com/t/understanding-ptxas-output/332181> (2026), <https://docs.nvidia.com/cuda/cuda-compiler-driver-nvcc/>, accessed 23 June 2026.
4. Sakdhnagool, P., Sabne, A., Eigenmann, R.: RegDem: Increasing GPU performance via shared memory register spilling. arXiv preprint (2019), <https://arxiv.org/abs/1907.02894>
5. Sarkar, D.: The correctness illusion in LLM-generated GPU kernels. arXiv preprint (2026), <https://arxiv.org/abs/2606.20128>
6. Tillet, P., Kung, H., Cox, D.: Triton: An intermediate language and compiler for tiled neural network computations. In: Proc. 3rd ACM SIGPLAN Int. Workshop on Machine Learning and Programming Languages (MAPL). pp. 10–19. ACM (2019). <https://doi.org/10.1145/3315508.3329973>, <https://doi.org/10.1145/3315508.3329973>