CCS375 WEB TECHNOLOGY LAB

LIST OF EXPERIMENTS

1. Create a web page with the following using HTML.
   - To embed an image map in a web page.
   - To fix the hot spots.
   - Show all the related information when the hot spots are clicked.
2. Create a web page with all types of Cascading style sheets.
3. Client Side Scripts for Validating Web Form Controls using DHTML.
4. Installation of Apache Tomcat web server.
5. Write programs in Java using Servlets:
   - To invoke servlets from HTML forms.
   - Session Tracking.
6. Write programs in Java to create three-tier applications using JSP and Databases
   - For conducting on-line examination.
   - For displaying student mark list. Assume that student information is available in a database which has been stored in a database server.
7. Programs using XML – Schema – XSLT/XSL.

Ex. No: 1 **DATE:**

IMAGE MAPPING

AIM:

To write a map and fix the hotspots to show the information of it in a web page.

ALGORITHM:

1. Start the program.
2. Get the india map image and link it to the package.
   <img src="flag.jpg">
   <img align="right" src = "India Map.gif" usemap="#india">
3. Fix the hotspots in that image.
4. Map the reference of the hotspots in the image.
   <area shape="circle" coords="274,745,20" href="tn.html">
5. Mention the derived link.
6. Click the link to get the desired image.
7. Stop the program.

SOURCE CODE:

Main.html

```
<html>
<head>
<BODY bgcolor="#gop6876cgdt5564ss">
<img src ="indiamap.jpeg" usemap="indiamap" />
<map name=indiamap>
<AREA SHAPE="rect" COORDS="190,477,251,562"
HREF="tamilnadu.html" target="tamilnadu.html" >
<AREA SHAPE="rect" COORDS="158,477,195,564" HREF="kerala.html"
target="kerala.html" >
<AREA SHAPE="rect" COORDS="217,378,238,472,350,361"
HREF="andhra.html" target="andhra.html" >
<AREA SHAPE="rect" COORDS="160,474,212,401,189,436"
HREF="karnataka.html" target="karnataka.html" >
<AREA SHAPE="rect" COORDS="137,382,219,311,129,331"
HREF="maharashtra.html" target="maharashtra.html" >
<AREA SHAPE="rect" COORDS="392,319,334,304,309,362,"
HREF="orissa.html" target="orissa.html" >
<AREA SHAPE="rect" COORDS="232,244,238,306,168,283" HREF="madhayapradesh.html"
target="madhayapradesh.html" >
</map>
</head>
</html>
```

```
<html>
<head>
<body bgcolor="#fggbhjgdhg"/>
<center><h2>it is a tamilnadu,here maximum tamilan living and capital of tamilnadu is
</h2><h1>chennai<h1></center>
</head>
</html>
```

Kerala.html

```
<html>
<head>
<body bgcolor="#7674dshddf"/>
<center>it is a kerala,here maximum malaiyalees living and capital of kerala is
<h1>Thiruvananthapuram</h1></center> </head>

</html>
```

Karataka.html

```
<html>
<head>
<body bgcolor="#7674dshddf"/>
<center>it is a karnataka,here maximum kannadam living and capital of karnataka is
<h1>Bangalore</h1></center>
</head>
</html>
```

Madhyapradesh.html


```
<html>
<head>
<body bgcolor="blue"/>
<center>it is a madhyapradesh,here maximum maratiyam living and capital of madhyapradesh
is <h1>BHOPAL</h1></center>
</head>
</html>
```


Maharastra.html


```
<html>
<head>
<body bgcolor="blue"/>
<center>it is a maharashtra,here maximum maratiyam living and capital of maharashtra is
<h1>Mumbai</h1></center>
</head>
</html>

<html>
<head>
<body bgcolor="blue"/>
<center><h2>it is a orissa,here maximum oreya living and capital of orissa is</h2>
<h1>Bhubaneswar</h1></center></head></html>
```

Output:

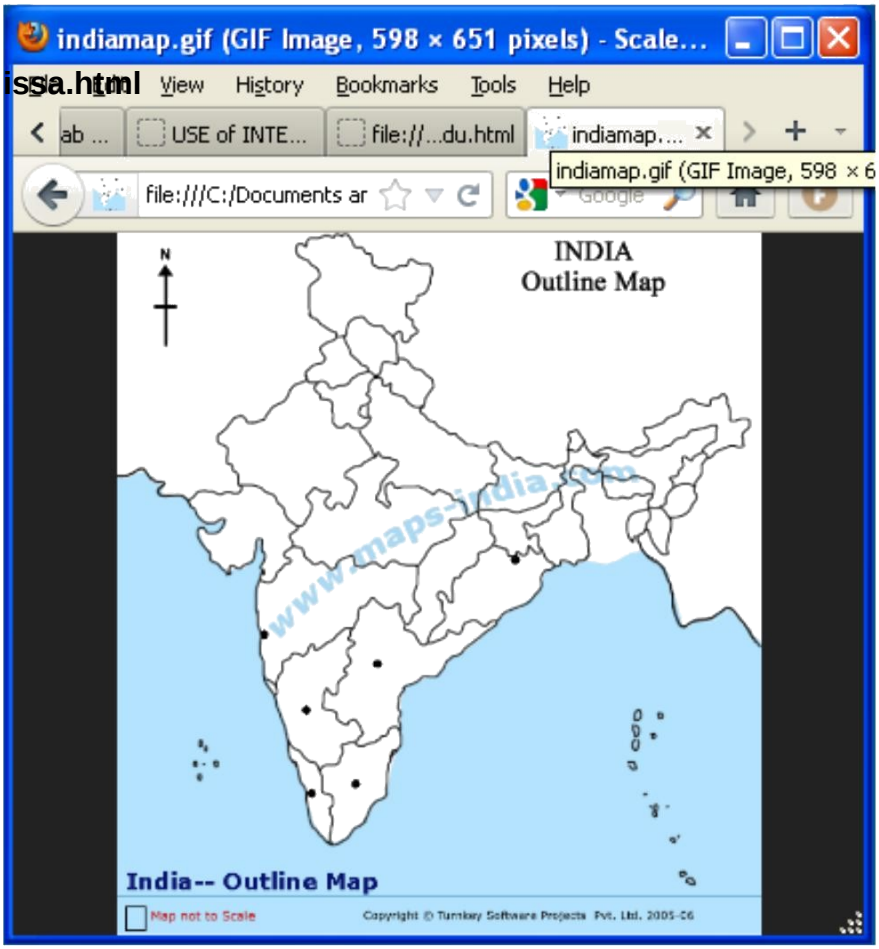
indiamap.gif (GIF Image, 598 × 651 pixels) - Scale...
issa.html
View
History
Bookmarks
Tools
Help
USE of INTE...
file://...du.html
indiamap....
indiamap.gif (GIF Image, 598 × 6
file:///C:/Documents ar
Google
INDIA
Outline Map
N
www.maps-india.com
India-- Outline Map
Map not to Scale
Copyright © Turnkey Software Projects Pvt. Ltd. 2005-06

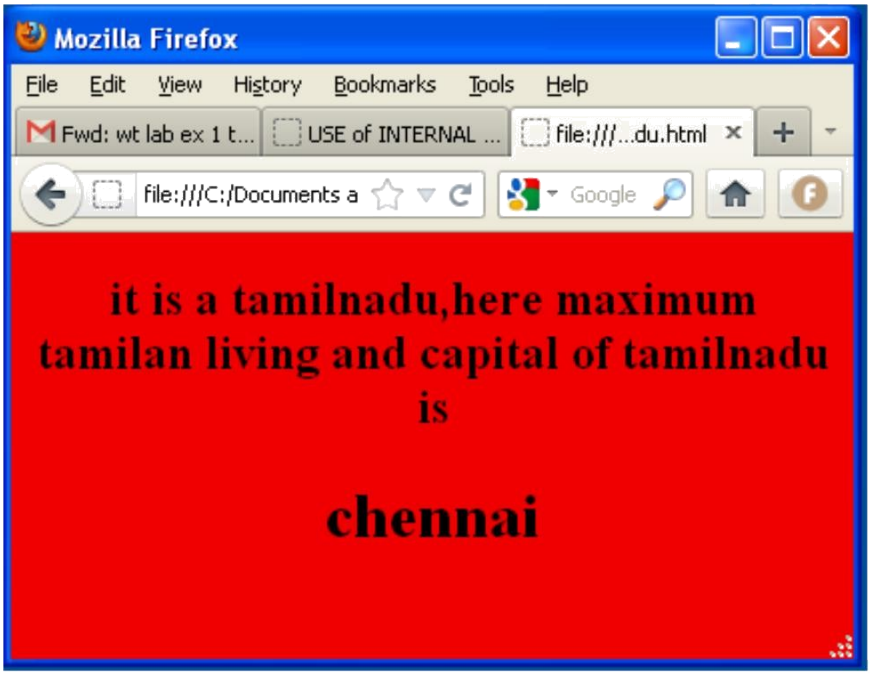

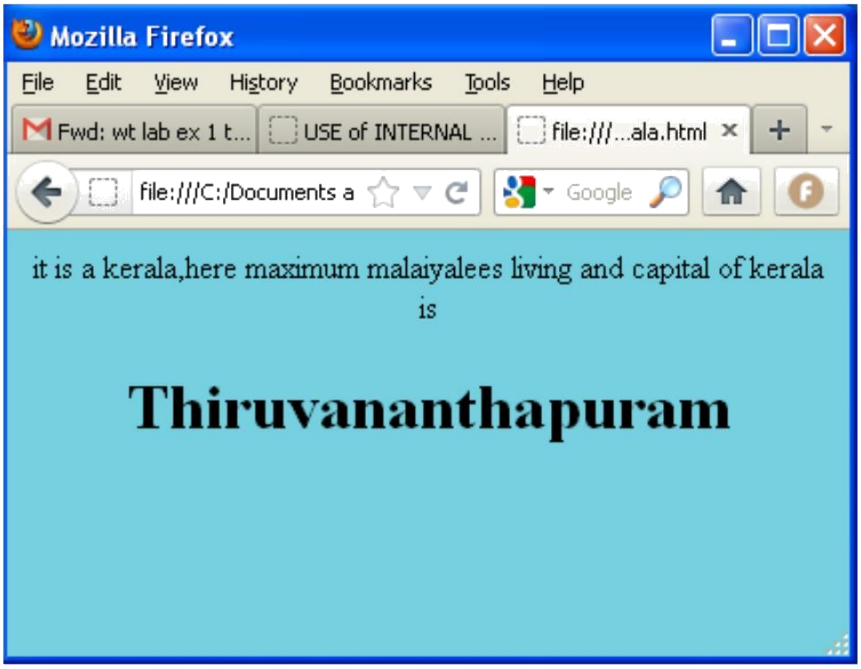

RESULT:

Thus the web page is created and the image is embedded with hot spot and the linking ages successfully, and the output is verified.

Ex. No: 2 **DATE:**

STYLE SHEET

AIM:

To write a webpage that displays college information using various style sheet.

ALGORITHM:

1. Start the program.
2. Create a web page with framesets consisting two frames.
3. In the first frame include the links.
4. In the second frameset display the webpage of the link.
5. Create a external style sheets.
6. Create a inline and internal style and make a link to the external style sheet.
7. Stop the program.

SOURCE CODE:

```
<html>
<head>
<title>Cascading Style Sheets</title>
</head>
<body alink="blue" vlink="brown">
<h1><u><b><font face="Monotype corsiva" color="red">
Different types of Cascading Style Sheets</font>
</b></u></h1> <br />
<font face="Arial"size="6">
<a href ="inline.html" style="text-decoration :none;"> 1. Inline Style
Sheet</a><br /> <a href ="embedded.html" style="text-decoration :none;"> 2.
Embeded Style Sheet</a><br />
<a href ="external.html" style="text-decoration :none;"> 3. External
Style Sheet</a><br />
<a href ="import.html" style="text-decoration :none;"> 4. Imported Style
Sheet</a><br /></font>
</body>
</html>
```

Inline.html

```
<html>
<head>
<title>Inline Style Sheet</title>
</head>
<body>
<ol class="decimal">
<h1 style="font-family :Monotype Corsiva ;background-color:antiquewhite ;"><li>
Inline Style Sheet</li></h1>
<h3>
<p style="text-indent :30pt;color:blue;font-family :arial;">
```

Inine Style is the style attached to one specific element.
The style is specified directly in the start tag as a value of the style attribute well apply exclusively to this specific element occurrence. </p></h3>

```
</ol>
</body>
</html>
```

Embedded.html

```
<html>
<head>
<title>Embeded Style Sheet</title>
<style type="text/css">
ol{list-style-type:decimal}
h1{text-align: left; background:antiquewhite;font-family:monotype corsiva;color:red}
h3{text-align: right; font-family:arial;color:blue}
</style>
</head>
<body>
<ol class="lroman"><h1>
<li>Embedded style sheet</li></h1>
<br />
Embedded style is the style attached to one specific document.
The information is specified as a content of the style element
inside the head element and wil apply to the entire documents.
</h3></ol>
</body>
</html>
```

External.html


```
<html>
<head>
<title>External Style Sheet</title>
<link rel=Stylesheet href="style1.css" type="text/css" />
</head>
<body>
<h1>1. External Style Sheet</h1><br />
<h3>
An external style sheet is a template documents/files
containing style info which can be linked with any number
of the documents. This is a very convenient way of formating
the entire site as well as restyling it by editing just one file</h3>
</body>
</html>
```


Import.html

```
<html>
<head><title>Imported Style Sheet</title>
<link rel= stylesheet href="style2.css" type="text/css">
```

```
</head>
<body>
<h1>1. Imported Style Sheet</h1>
<h3> Imported style sheet is a shet that can be imported to another sheet.
This alignes exacting one main sheet containing declarations that apply to
the whle site and partial sheets containing declarations that apply to specific
elements.</h3>
</body>
</html>
```

Output:

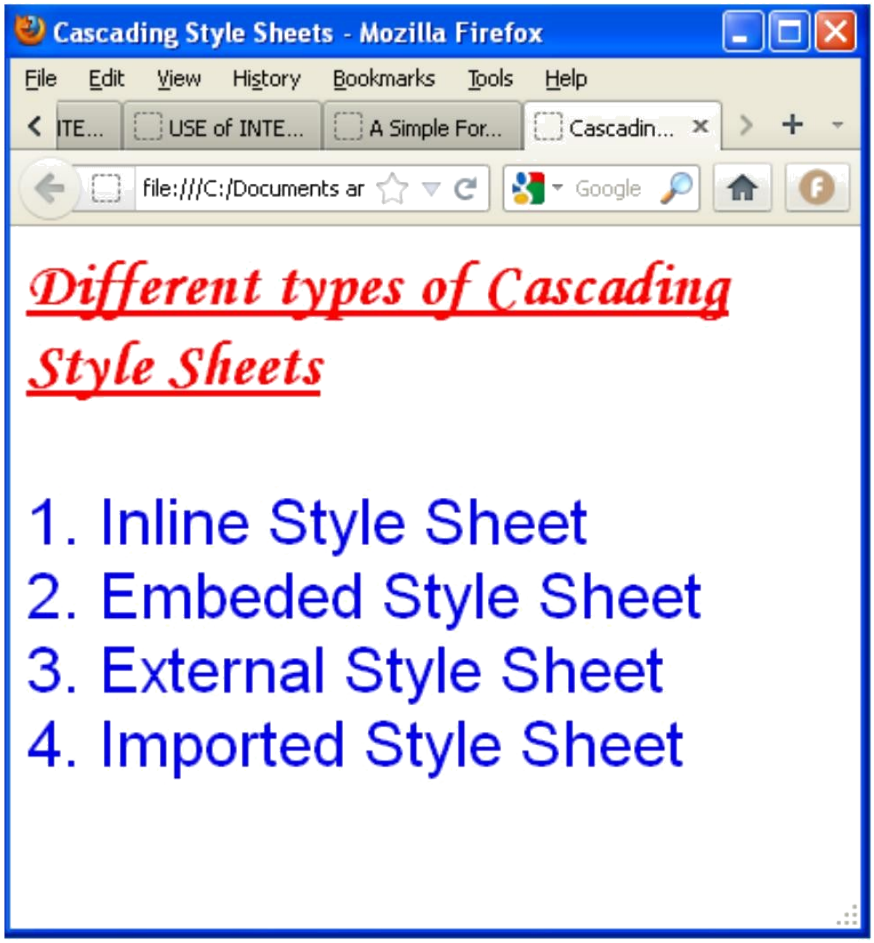

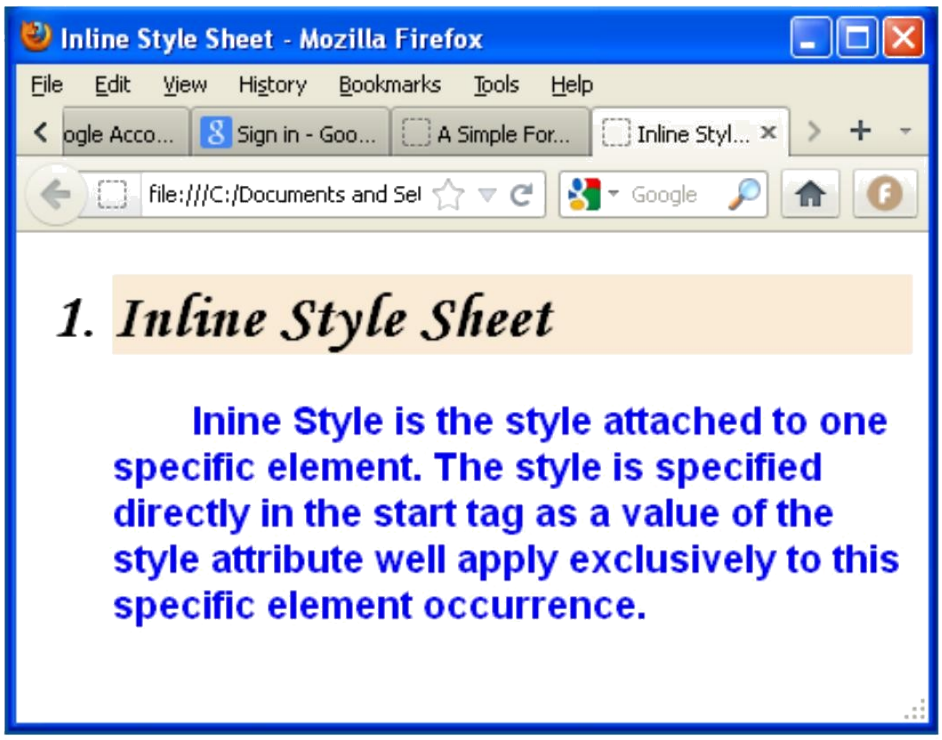
Inline Style Sheet - Mozilla Firefox
File Edit View History Bookmarks Tools Help
ogle Acco... Sign in - Goo... A Simple For... Inline Styl...
file:///C:/Documents and Sel
Google
1. Inline Style Sheet
Inine Style is the style attached to one specific element. The style is specified directly in the start tag as a value of the style attribute well apply exclusively to this specific element occurrence.


Embeded Style Sheet - Mozilla Firefox
File Edit View History Bookmarks Tools Help
n in - Goo... A Simple For... Inline Style S... Embeded ...
file:///C:/Documents and Sel
Google
1. Embedded style sheet
Embedded style is the style attached to one specific document. The information is specified as a content of the style element inside the head element and wil apply to the entire documents.

RESULT:

Thus the web page is created using all tyes of cascading style sheets successfully and the output is also verified.

EX. No: 3 **DATE:**

WEB FORM VALIDATION

AIM:

To write a DHTML code for creating the web page for validating the web form**.**

ALGORITHM:

1.The form will include one text field called "Your Name", and a submit button.
2.Validation script will ensure that the user enters their name before the form is sent to the server.
3.Open this page to see it in action.
4.Try pressing the **Send Details** button without filling anything in the "Your Name" field.
5.You might like to open the source code for this form in a separate window
6.The page consists of a JavaScript function called validate_form() that performs the form validation, followed by the form itself.


SOURCE CODE:


```
<html>
<head>
<title>A Simple Form with JavaScript Validation</title>
<script type="text/javascript"> <!--

function validate_form ( )
{
valid = true;
if ( document.contact_form.contact_name.value == "" )
{
alert ( "Please fill in the 'Your Name' box." );
valid = false;
}
if(document.contact_form.contact_name.value)
{
alert("Your details had sended");
valid=true;
}
return valid;
}
//-->
</script>
</head>
<body bgcolor=”#FFFFFF”>
<form name="contact_form" method="post"
action="css.html"
onSubmit="return validate_form();">
<h1>Please Enter Your Name</h1>
<p>Your Name: <input type="text" name="contact_name"></p>
<p><input type="submit" name="send" value="Send Details"></p>

</form>
</body>
</html>
```

OUTPUT:

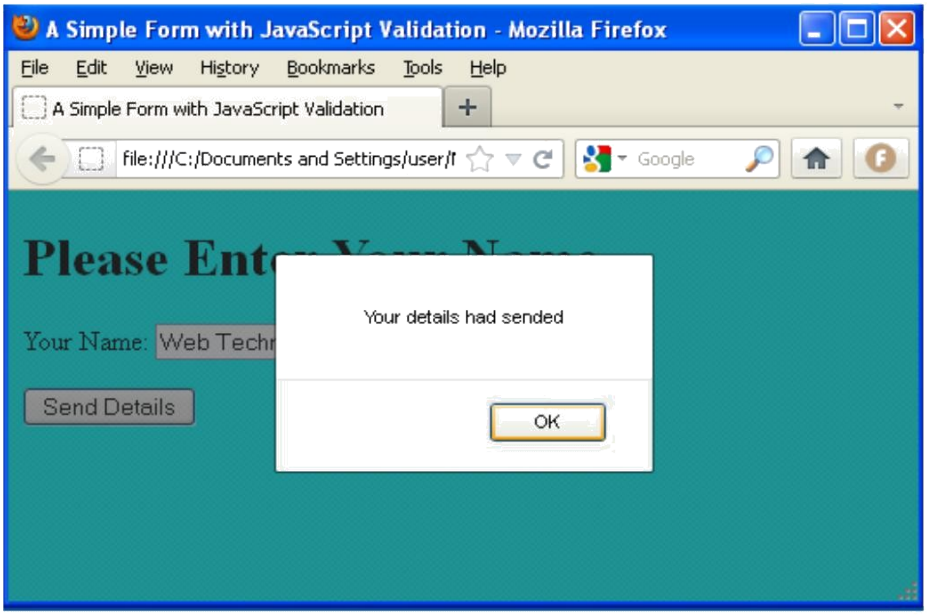
A Simple Form with JavaScript Validation - Mozilla Firefox
File Edit View History Bookmarks Tools Help
A Simple Form with JavaScript Validation
file:///C:/Documents and Settings/user/
Google
Please Ent
Your Name: Web Techr
Send Details
Your details had sended
OK

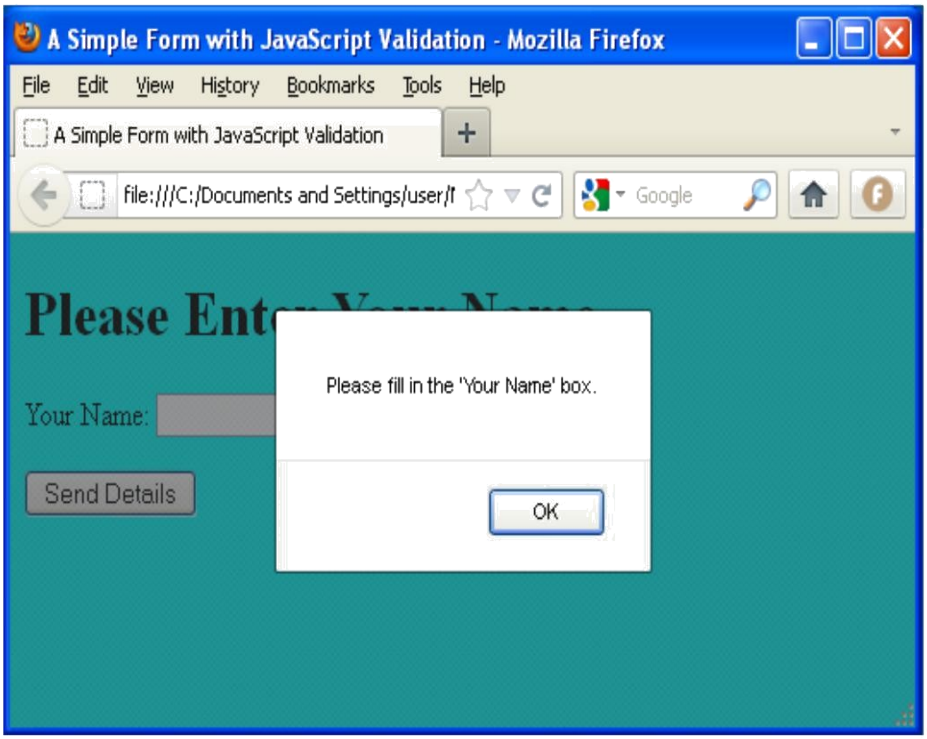
A Simple Form with JavaScript Validation - Mozilla Firefox
File Edit View History Bookmarks Tools Help
A Simple Form with JavaScript Validation
file:///C:/Documents and Settings/user/
Google
Please Ent
Your Name:
Send Details
Please fill in the 'Your Name' box.
OK

RESULT:

Thus the program has been written for creating the web page for validating the informations.


Ex. No: 4 **DATE:**

INSTALLATION OF APACHE TOMCAT WEB SERVER.

Step 1: Download Tomcat for Windows

To download the Tomcat installation file, follow the steps below:

1. Browse to the official Apache Tomcat website. Locate the *Download* section and click the **latest Tomcat version** available. At the time of writing this article, the latest Tomcat version was version 10.

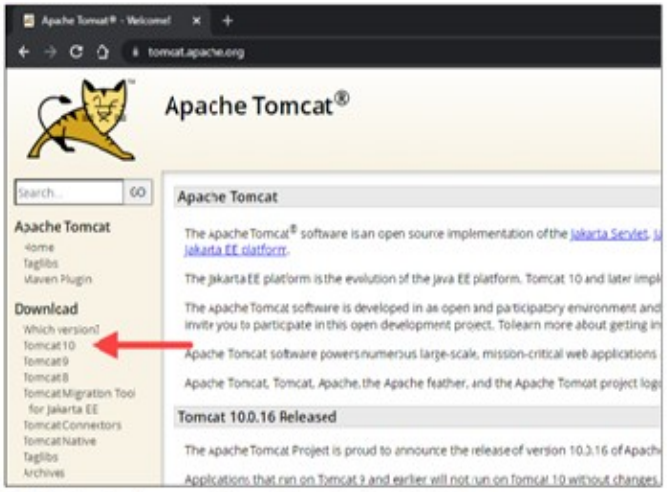

2. On the *Download* page scroll down and locate the *Binary Distributions* area.

Step 2: Install Tomcat


Install Tomcat via the **Windows Service Installer** for an automated and wizard-guided experience. The service installer installs the Tomcat service and runs it automatically when the system boots.

For a portable experience, install Tomcat using the **zip file** and avoid installing the service. Easily uninstall Tomcat when it is no longer needed by deleting the Tomcat directory, or move it around when necessary.


Method 1: Install Tomcat Using the Windows Service Installer

Follow the steps below to install Tomcat using the Windows Service Installer.


1. Open the downloaded **Windows Service Installer** file to start the installation process.
2. In the Tomcat Setup welcome screen, click **Next** to proceed.

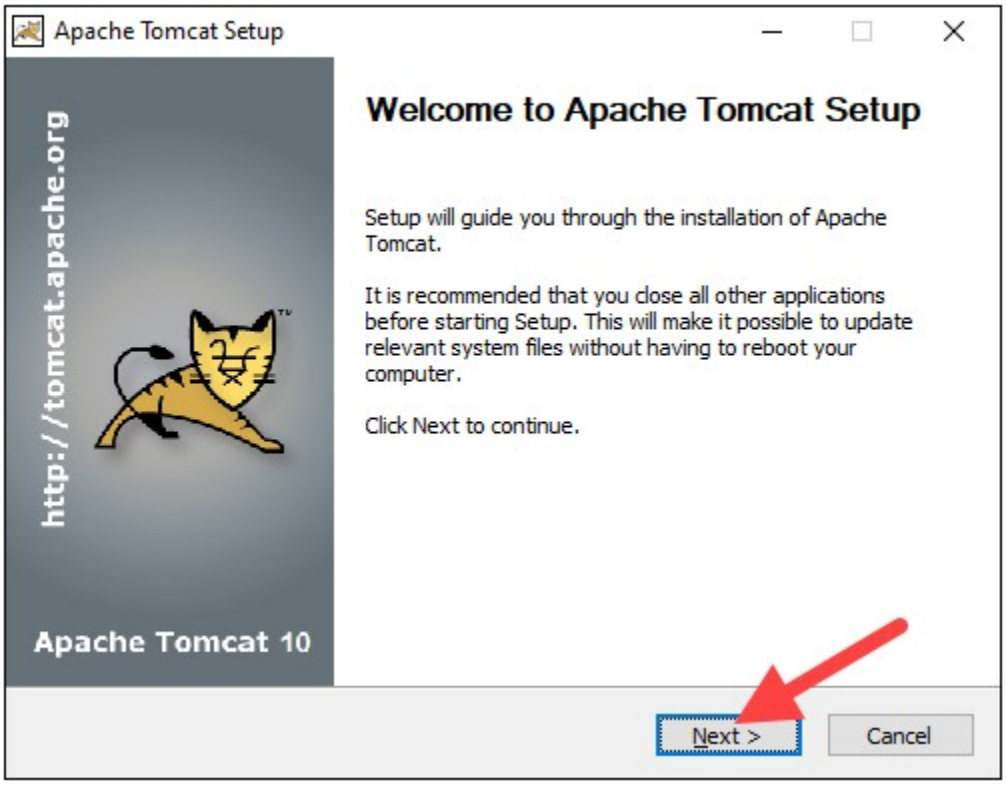


3. Read the License Agreement and if you agree to the terms, click **I Agree** to proceed to the next step.

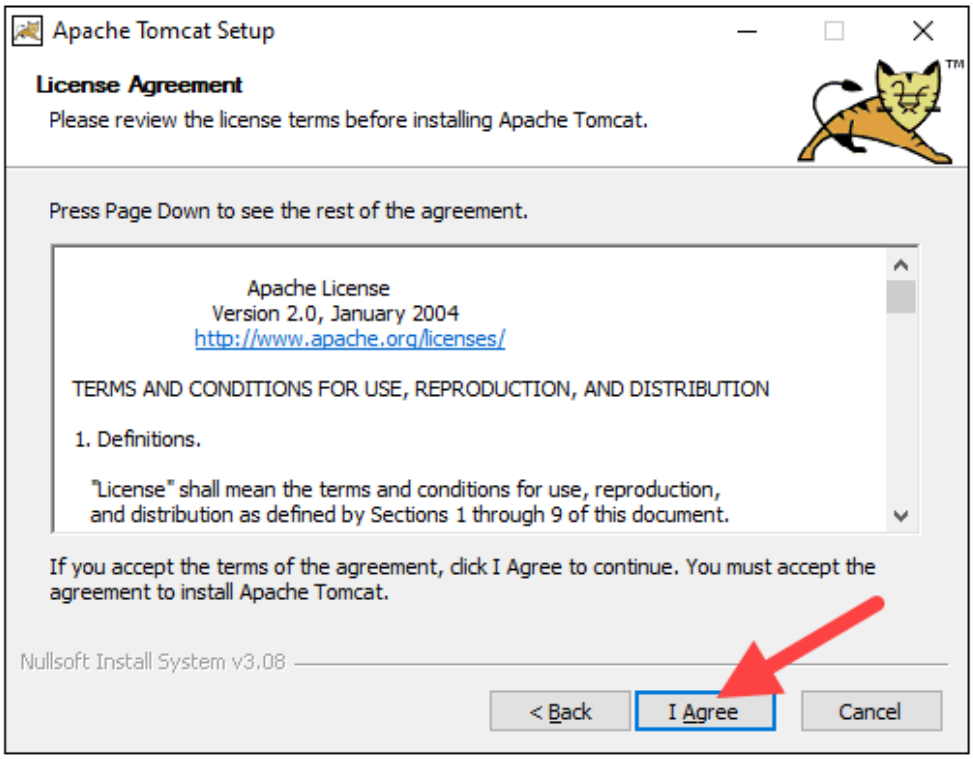


4. In the Tomcat component selection screen, choose **Full** in the dropdown menu to ensure the wizard installs the Tomcat Host Manager and Servlet and JSP examples web applications. Alternatively, keep the default **Normal** installation type and click **Next**.

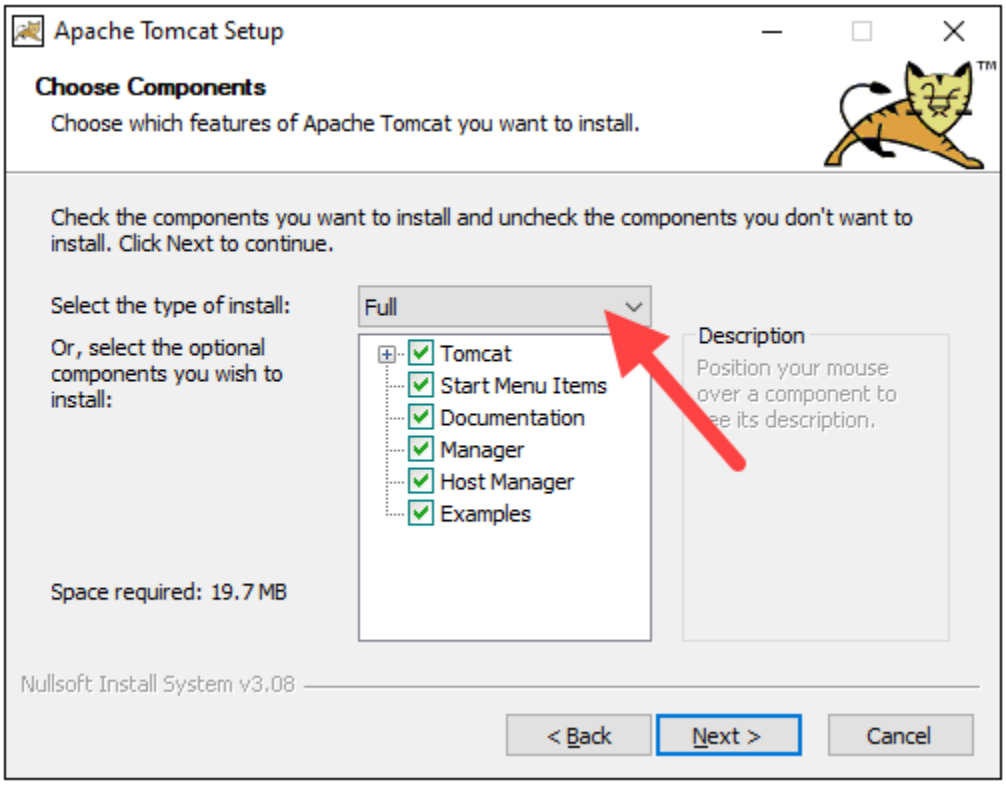


5. The next step configures the Tomcat server. For instance, enter the **Administrator login credentials** or choose a different **connection port**. When finished, click **Next** to proceed to the next step.

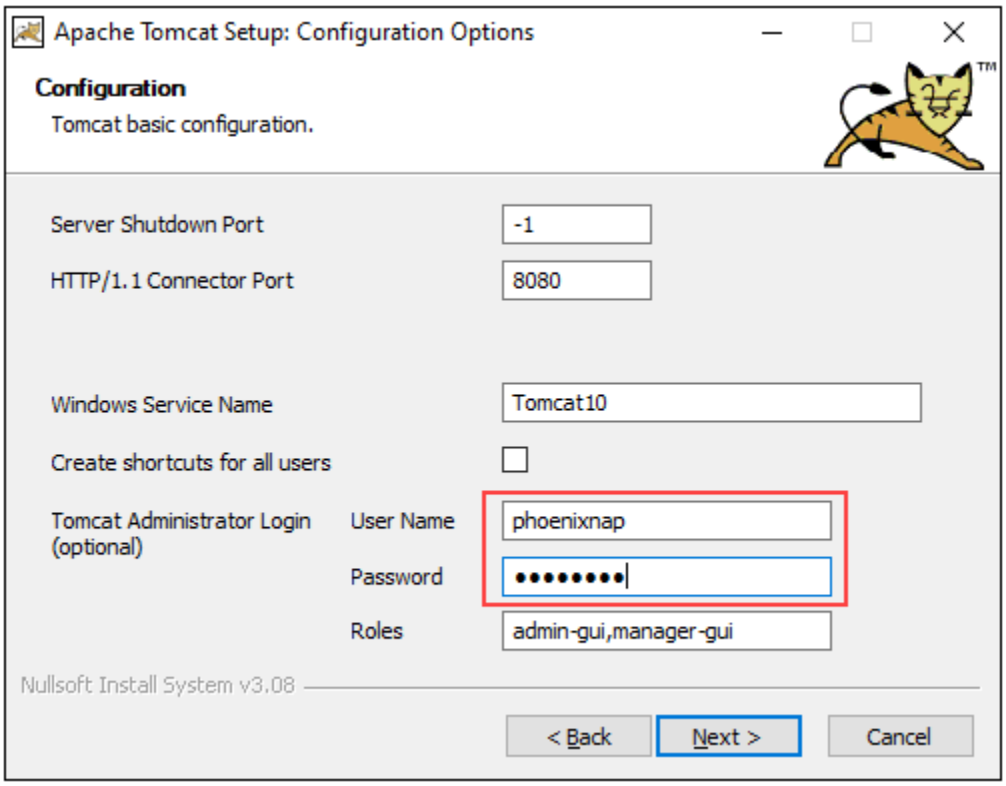


6. The next step requires you to enter the full path to the JRE directory on your system. The wizard auto-completes this if you have previously set up the Java environment variables. Click **Next** to proceed to the next step.

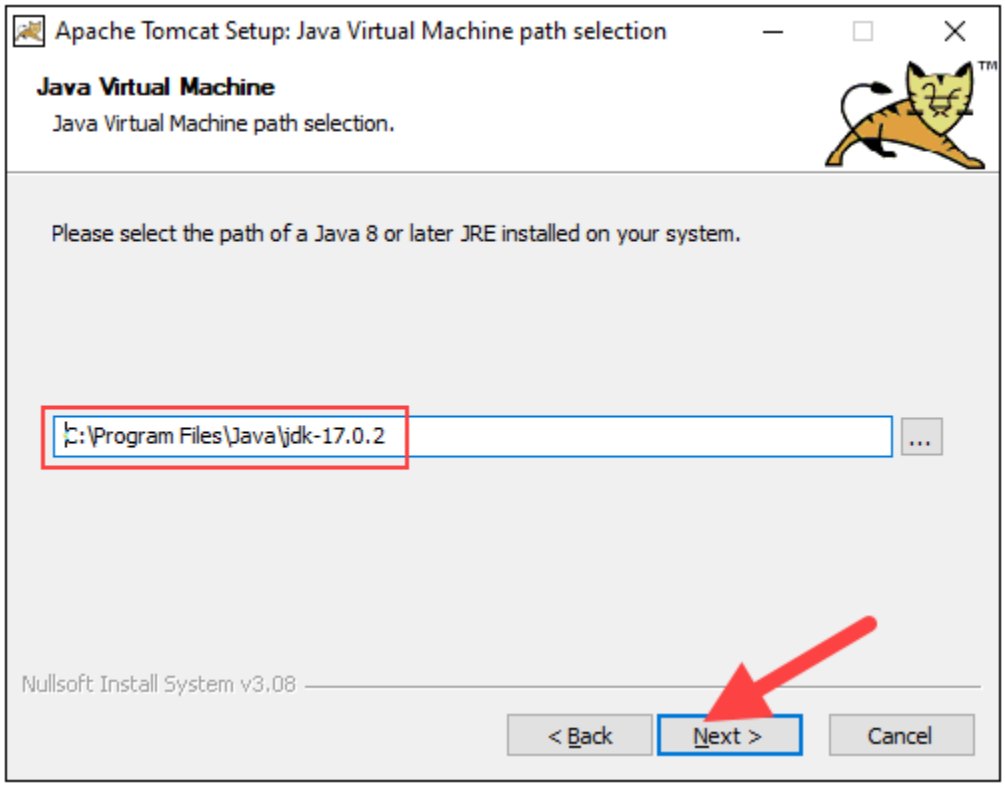


7. Choose the Tomcat server install location or keep the default one and click **Install**.

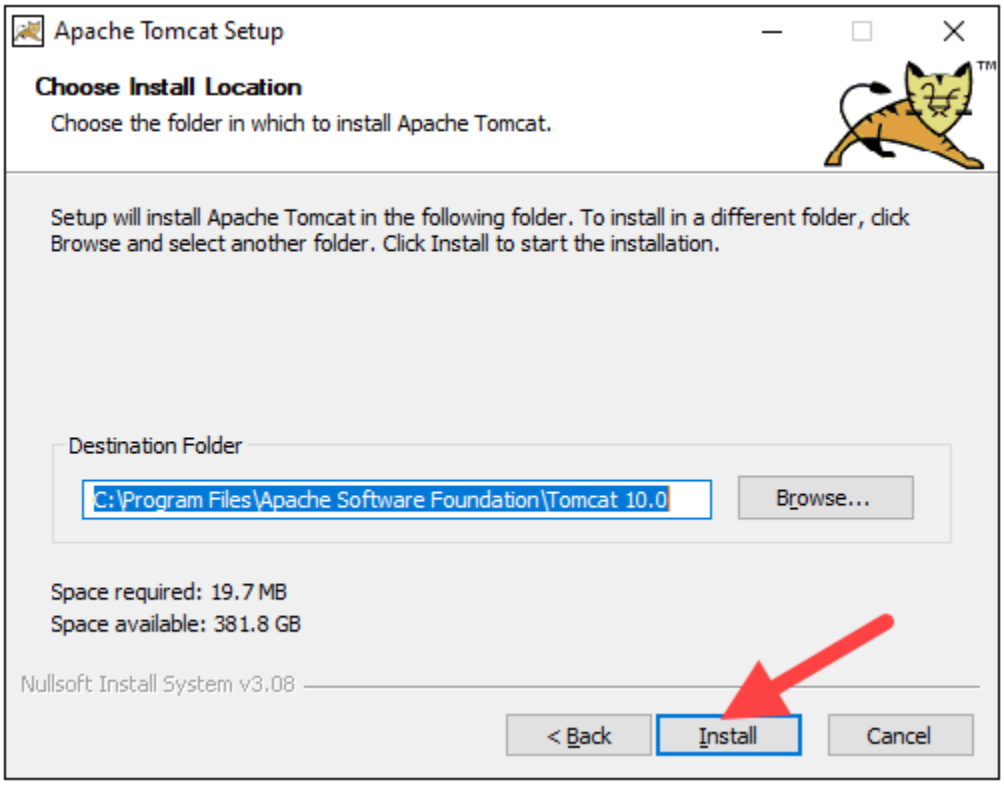


8. Check the **Run Apache Tomcat** box to start the service after the installation finishes. Optionally, check the **Show Readme** box to see the Readme file. To complete the installation, click **Finish**.

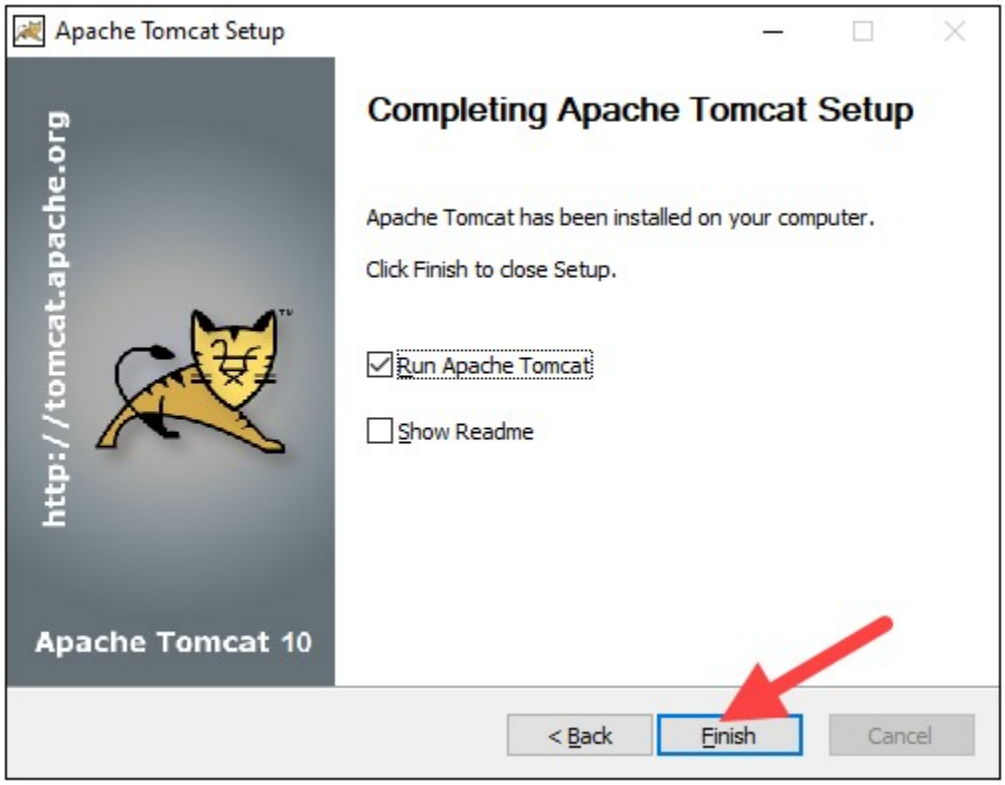

9. A popup window appears that starts the Tomcat service. After the process completes, the window closes automatically. The Apache Tomcat web server is now successfully installed .

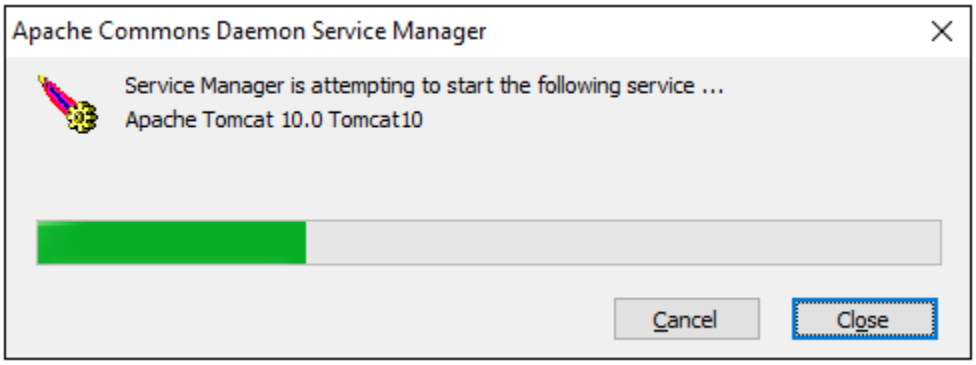


10. Access the server using a browser as an HTTP client. Browse to http://localhost:8080 and access the Tomcat welcome page to ensure the server works.

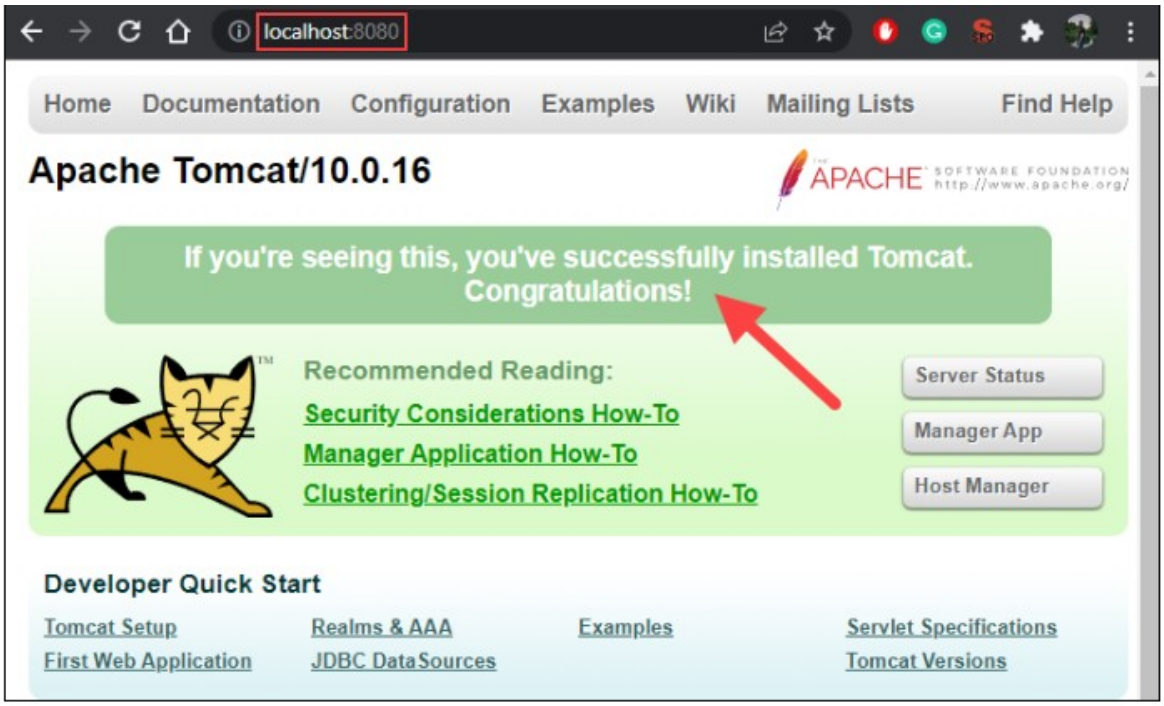


Step 3: Check if Apache Tomcat Service Is Running

Installing Tomcat using the Windows Service Installer installs Tomcat as a Windows service that automatically runs on boot. Follow the steps below to ensure that Tomcat is started as a Windows service.

1. Open the **Start** menu and search for *Services*.
2. Select the **Services** result.

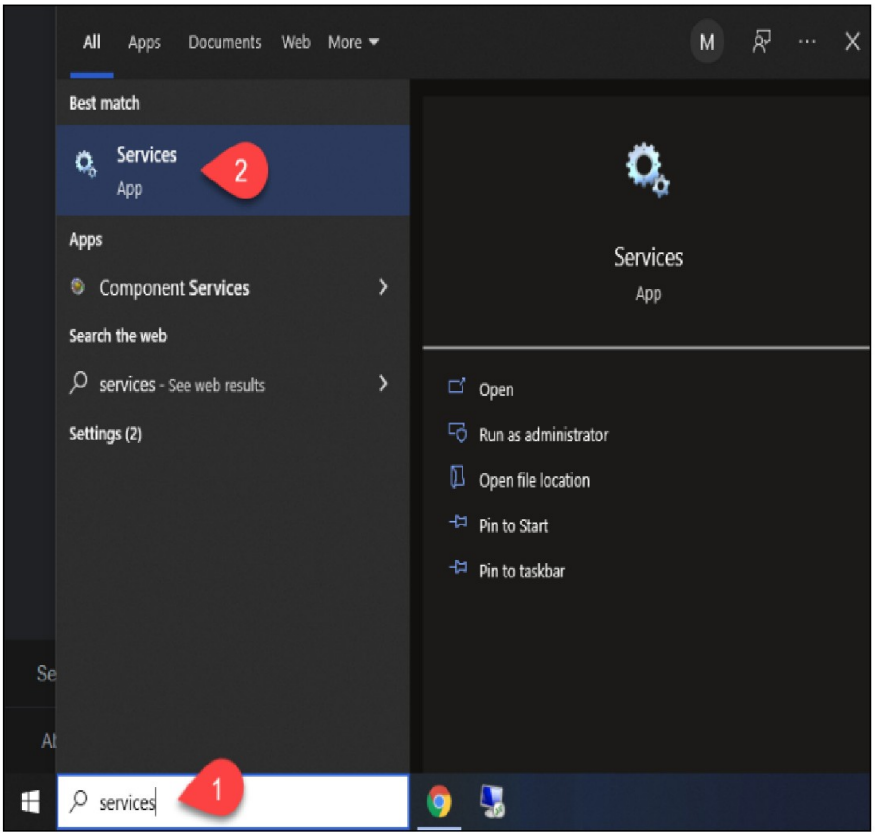


3. In the *Services* window, locate the *Apache Tomcat* service. The *Status* column indicates whether the service is running or not. **Start** or **Stop** the service using the buttons in the toolbar or by pressing **Stop** or **Restart** on the left side of the service list.

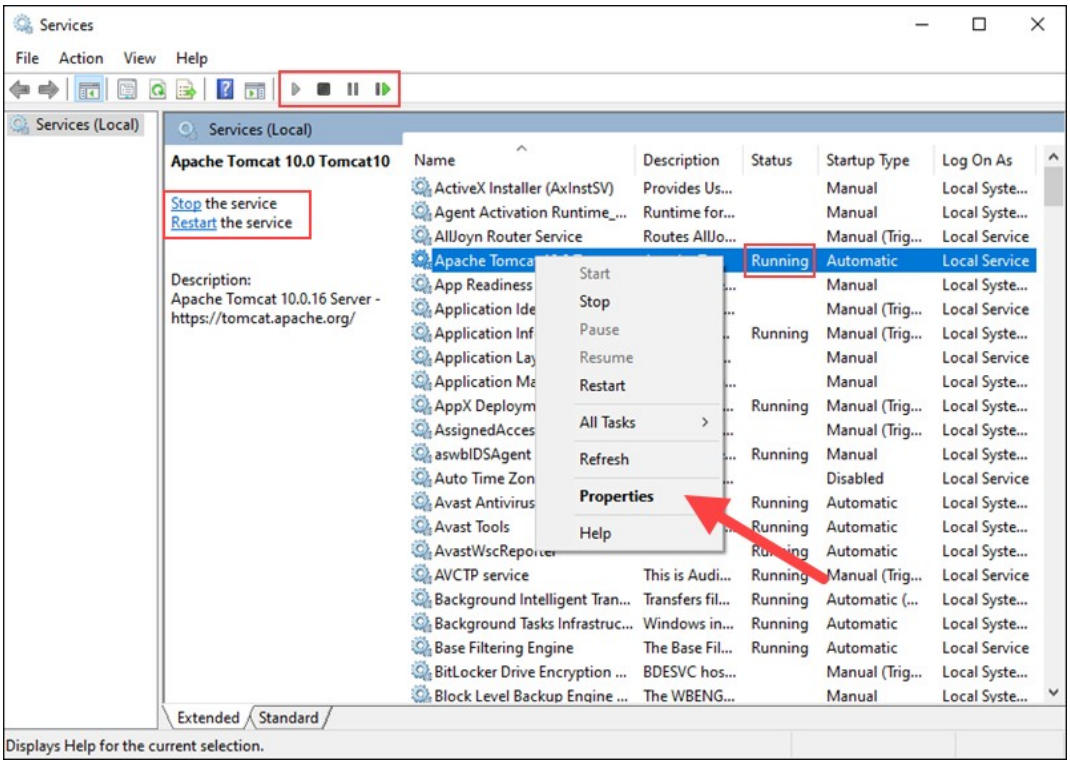

Configure the service startup by right-clicking the **Tomcat service** and selecting **Properties**.

4. In the *Properties* window, under the *Startup type* dropdown menu, select how to run the Tomcat service:

- **Automatic (Delayed Start)**. Starts the service shortly after boot. A delayed start improves server boot performance and has security benefits.
- **Automatic**. Automatically starts the service on boot.
- **Manual**. The service starts only when Windows or another service needs it or if invoked.
- **Disabled**. Disables the service startup, even if you try to start it.

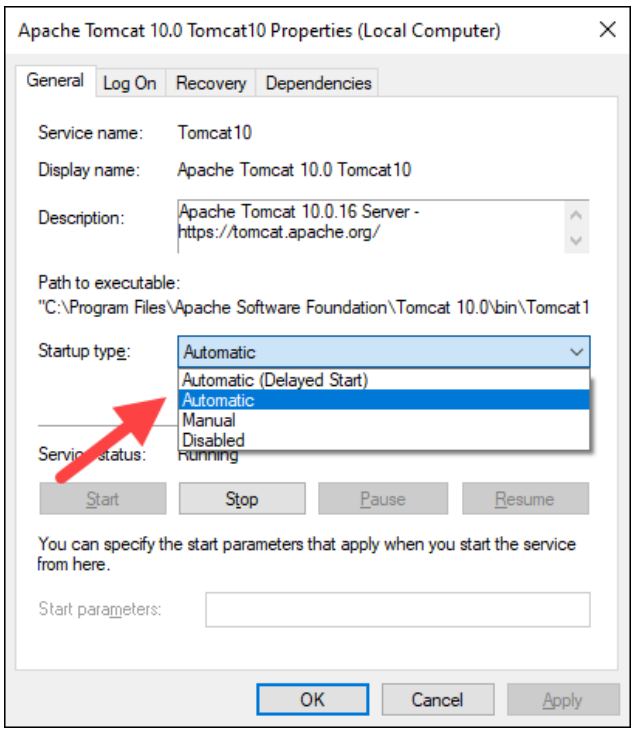

Click **OK** to confirm the changes.

Ex. No: 5A **DATE:**

INVOKING SERVLET FROM HTML FORMS

AIM:

To write a java program for invoking servlet from HTML form.

ALGORITHM:

1. Start the program.
2. Create the form as ResponseDemoServlet with textfield,submit Button and reset button.
3. The class ResponseDemoServlet implements the interface servlet.
4. Create the out object for the PrintWriter class and call the method Getwriter as response.getwriter.
5. Display the server port, server name, protocol, character encoding, content length.
6. Create the class as enumeration with parameters as object.
7. Stop the program.

SOURCE CODE:

Client Page:


```
<HTML>
<HEAD>
<TITLE>Sending a request</TITLE>
</HEAD>
<BODY>
<FORM ACTION= ResponseDemoServlet METHOD="POST">
<BR><BR>
Author: <INPUT TYPE="TEXT" NAME="Author">
<INPUT TYPE="SUBMIT" NAME="Submit">
<INPUT TYPE="RESET" VALUE="Reset">
</FORM>
</BODY>
</HTML>
```


Server Page:

```
importjavax.servlet.*;
importjava.io.PrintWriter;
importjava.io.IOException;
importjava.util.Enumeration;
public class ResponseDemoServlet implements Servlet {
public void init(ServletConfigconfig) throws ServletException
  { } public void destroy() { }
public void service(ServletRequest request, ServletResponse response)
throwsServletException, IOException {
PrintWriter out = response.getWriter();
out.println("<HTML>");
```

```
out.println("<HEAD>");
out.println("<TITLE>");
out.println("ServletResponse");
out.println("</TITLE>");
out.println("</HEAD>");
out.println("<BODY>");
out.println("<B>Demonstrating the ServletResponse
object</B>"); out.println("<BR>");
out.println("<BR>Server Port: " + request.getServerPort());
out.println("<BR>Server Name: " + request.getServerName());
out.println("<BR>Protocol: " + request.getProtocol());
out.println("<BR>Character Encoding: " + request.getCharacterEncoding());
out.println("<BR>Content Type: " + request.getContentType());
out.println("<BR>Content Length: " + request.getContentLength());
out.println("<BR>Remote Address: " + request.getRemoteAddr());
out.println("<BR>Remote Host: " + request.getRemoteHost());
out.println("<BR>Scheme: " + request.getScheme());
   Enumeration parameters = request.getParameterNames();
while (parameters.hasMoreElements()) {
     String parameterName = (String) parameters.nextElement();
out.println("<br>Parameter Name: " + parameterName);
out.println("<br>Parameter Value: " +
request.getParameter(parameterName));
   }
   Enumeration attributes = request.getAttributeNames();
while (attributes.hasMoreElements()) {
     String attribute = (String) attributes.nextElement();
out.println("<BR>Attribute name: " + attribute);
out.println("<BR>Attribute value: " + request.getAttribute(attribute));
   }
out.println("</BODY>");
out.println("</HTML>");
  }
public String getServletInfo() {
return null;
  }
publicServletConfiggetServletConfig() {
return null;
}
}
```

OUTPUT:

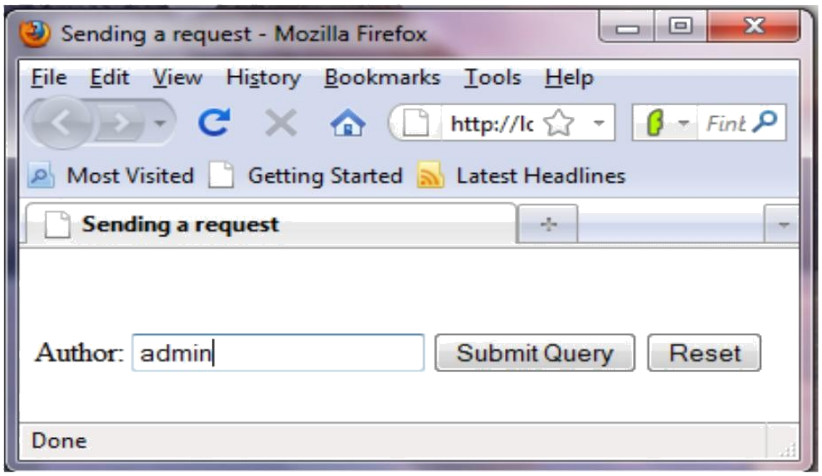

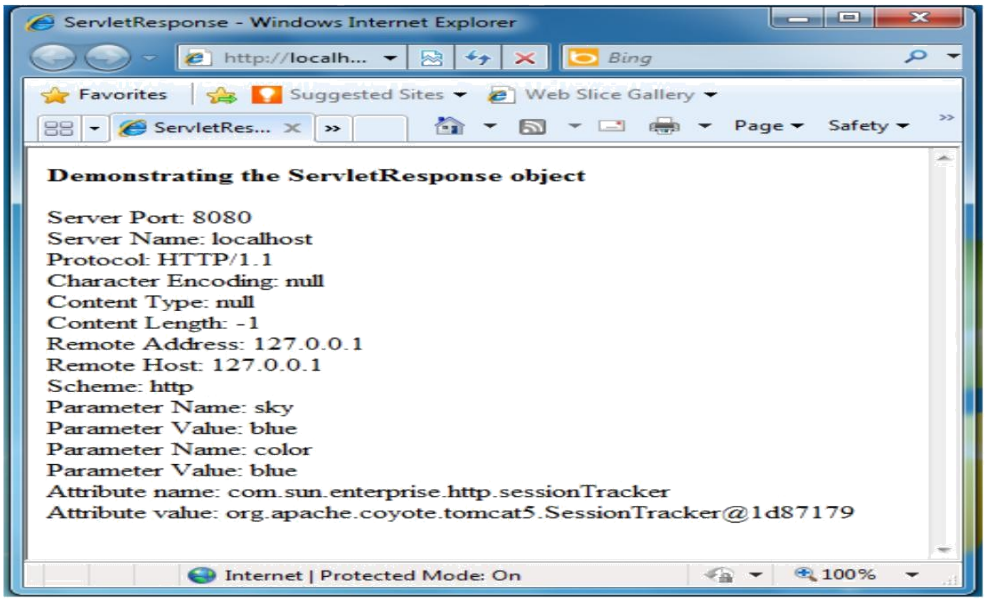

RESULT:

Thus the program for invoking servlet from HTML form was executed and the output was verified.

Ex. No: 5B **DATE:**

SESSION TRACKING

AIM:

To write a java program for session tracking from servlet

ALGORITHM:

1. Start the program.
2. The class Session Track implements the interface Httpservlet.
3. Create a session object for Httpsession class.
4. Create the out object for the Print Writer class and call the method Get writer as response.getwriter.
5. To track and display the session information like id, creation time, time of last access, user id and number of visits.
6. Stop the program.

SOURCE CODE:

SessionTrack.java

```
import java.io.*;
import javax.servlet.*;
import javax.servlet.http.*;
import java.util.*;

// Extend HttpServlet class
public class SessionTrack extends HttpServlet {

   public void doGet(HttpServletRequest request,
HttpServletResponse response)
      throws ServletException, IOException {

      // Create a session object if it is already not
created.
      HttpSession session = request.getSession(true);

      // Get session creation time.
      Date createTime = new
Date(session.getCreationTime());

      // Get last access time of this web page.
      Date lastAccessTime = new
Date(session.getLastAccessedTime());

      String title = "Welcome Back to my website";
      Integer visitCount = new Integer(0);
      String visitCountKey = new String("visitCount");
```

```
      String userIDKey = new String("userID");
      String userID = new String("ABCD");

      // Check if this is new comer on your web page.
      if (session.isNew()) {
         title = "Welcome to my website";
         session.setAttribute(userIDKey, userID);
      } else {
         visitCount =
(Integer)session.getAttribute(visitCountKey);
         visitCount = visitCount + 1;
         userID =
(String)session.getAttribute(userIDKey);
      }
      session.setAttribute(visitCountKey,  visitCount);

      // Set response content type
      response.setContentType("text/html");
      PrintWriter out = response.getWriter();

      String docType =
         "<!doctype html public \"-//w3c//dtd html 4.0 "
+
         "transitional//en\">\n";

      out.println(docType +
         "<html>\n" +
            "<head><title>" + title + "</title></head>\n"
+

            "<body bgcolor = \"#f0f0f0\">\n" +
               "<h1 align = \"center\">" + title +
"</h1>\n" +
               "<h2 align = \"center\">Session
Infomation</h2>\n" +
               "<table border = \"1\" align =
\"center\">\n" +

                  "<tr bgcolor = \"#949494\">\n" +
                     "  <th>Session
info</th><th>value</th>
                  </tr>\n" +

                  "<tr>\n" +
                     "  <td>id</td>\n" +
```

```
                    "  <td>" + session.getId() + "</td>
                  </tr>\n" +


                  "<tr>\n" +
                    "  <td>Creation Time</td>\n" +
                    "  <td>" + createTime + "  </td>
                  </tr>\n" +

                  "<tr>\n" +
                    "  <td>Time of Last Access</td>\n" +
                    "  <td>" + lastAccessTime + "  </td>
                  </tr>\n" +


                  "<tr>\n" +
                    "  <td>User ID</td>\n" +
                    "  <td>" + userID + "  </td>
                  </tr>\n" +

                  "<tr>\n" +
                    "  <td>Number of visits</td>\n" +
                    "  <td>" + visitCount + "</td>
                  </tr>\n" +
               "</table>\n" +
            "</body>
         </html>"
      );
   }
}
```

OUTPUT:

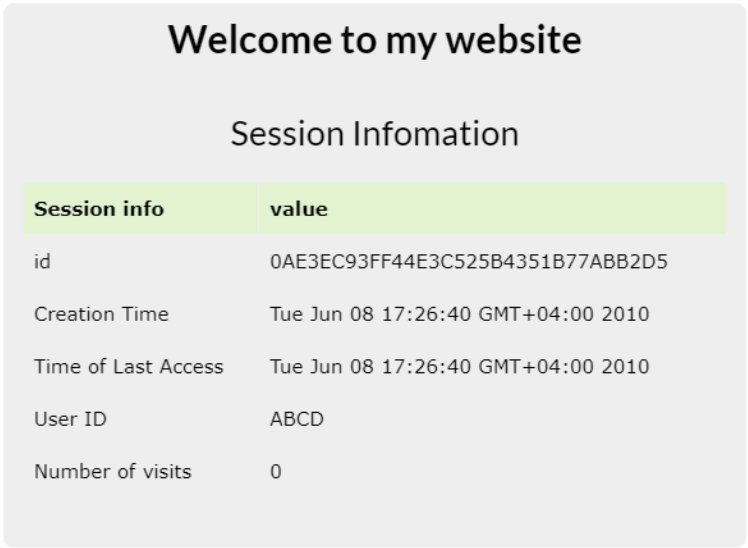

Now try to run the same servlet for second time, it would display following result.

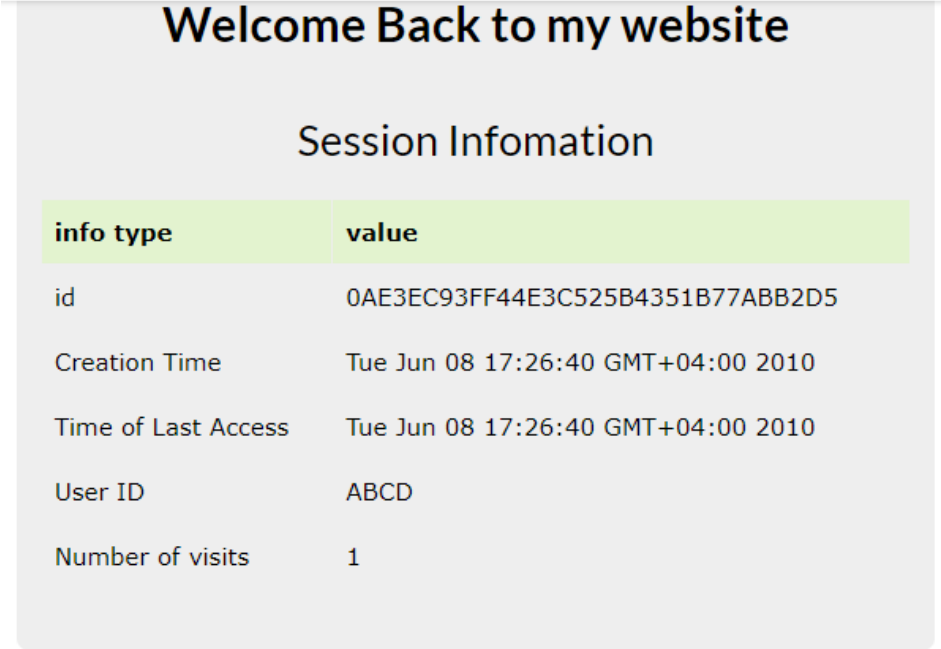

RESULT:

Thus the program for session tracking using servlet was successfully executed and verified.

Ex. No: 7 **DATE:**

ONLINE EXAMINATION

AIM:

To write the JSP program for online examination.

ALGORITHM:

1. Start the program.
2. With the scriplet tag, include information like document Created on and author.
3. Set the content type using page content type=”txt\html”.
4. Include the doctype with transitional flavour.
5. Get the input as regno , name and store in the table.
6. Create the forms as exam and index.
7. Click the submit button, after completing all the questions. If the answers are correct it will display as correct else incorrect.
8. Stop the program.

SOURCE CODE:

Newjsp.jsp:

```
<%--
   Document   : exam
   Created on : Feb 23, 2011, 7:19:15 PM
   Author     : A
--%>

<%@page contentType="text/html" pageEncoding="UTF-8"%> <!DOCTYPE
HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
  "http://www.w3.org/TR/html4/loose.dtd">

<html>
   <head>
      <meta http-equiv="Content-Type" content="text/html;
      charset=UTF-8"> <title>Examination Panel</title>
   </head>
   <body bgcolor="cyan">
      <%@ page language="java" %>
<%@ page import ="java.sql.*" %>
<%
String reg= request.getParameter("txt_reg"); String name =
request.getParameter("txt_name"); out.println("<h2>Welcome" + name +
"...Your Register number is " + reg + "!!</h2><br><br><br>");
```

```
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
String sTable = "exam";
String sSql = "SELECT * FROM " + sTable + "";
String database = "jdbc:odbc:sDBQ";
Connection cn = null;
Statement st = null;
ResultSet rs = null;
try {
cn = DriverManager.getConnection( database ,"sa",""); st
= cn.createStatement();
rs = st.executeQuery( sSql );
ResultSetMetaData rsmd = rs.getMetaData();
String s1,s2,s3,s4;
int i=1;
  while(rs.next())
{
out.println("<form name='exam' action='newjsp2.jsp' method='post'><b>"+i+" . " +
rs.getString(1) + "</b><br><br>");
s1 = rs.getString(2);
s2 = rs.getString(3);
s3 = rs.getString(4);
s4 = rs.getString(5);
out.println("<input type=radio name=opt"+i+" value="+s1+" CHECKED>"+ s1 +" <br><br>");
out.println("<input type=radio name=opt"+i+" value="+s2+">" + s2 +"<br><br>");
out.println("<input type=radio name=opt"+i+" value="+s3+">" + s3 +"<br><br>");
out.println("<input type=radio name=opt"+i+" value="+s4+">" + s4 +"<br><br>"); i++;
}
out.println("<input name ='submit' value='Submit' type='submit'/>");
/*int n = rsmd.getColumnCount();
out.println( "<table border=1 cellspacing=3><tr>" );
for( int i=1; i<=n; i++ ) // Achtung: erste Spalte mit 1 statt 0
out.println( "<th>" + rsmd.getColumnName( i ) + "</th>" );
while( rs.next() )
{out.println( "</tr><tr>" );
for( int i=1; i<=n; i++ ) // Achtung: erste Spalte mit 1 statt
0 o ut.println( "<td nowrap>" + rs.getString( i ) + "</td>" );
}
out.println( "</tr></table>" );*/
}finally {
try { if( null != rs ) rs.close(); } catch( Exception ex ) {}
try { if( null != st ) st.close(); } catch( Exception ex ) {}
try { if( null != cn ) cn.close(); } catch( Exception ex )
{} }
%>      </body>
</html>
```

Newjsp1.jsp

```
<%--
   Document   : index
   Created on : Feb 9, 2011, 6:50:54 PM
   Author     : A
--%>
<%@page contentType="text/html" pageEncoding="UTF-8"%> <!
DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
  "http://www.w3.org/TR/html4/loose.dtd">

<html>
   <head>
      <meta http-equiv="Content-Type" content="text/html;
      charset=UTF-8"> <title>Welcome to Online Examination</title>
   </head>
   <body bgcolor="cyan">
      <form name="index" action="newjsp.jsp" method="post">
      <center><h1><span><font color="red">Welcome to Online
Examination</font></span></h1>
      <br>
      <h2><u><span><font color="blue">Instructions to
the Candidates</font></span></u></h2>
      <br><h3><ol><li>Fill the correct Registration number.</li>
      <br><li>Enter your name.</li> <br><li>Read the questions
      carefully.</li>
      <br><li>No negative marking.</li></ol></h3>

      <br>
      <b>Enter your Register number</b>
      <input type="text" name="txt_reg">
      <b>Enter your Name</b>
      <input type="text" name="txt_name"><br><br>
      <input name ="submit" value="Submit" type="submit"/>
      </center>
      </form>
   </body>
</html>
```


Newjsp2.jsp


```
<%--
   Document   : report
   Created on : Feb 23, 2011, 9:09:37 PM
   Author     : A
--%>
<%@page import="com.sun.java.swing.plaf.windows.resources.windows_es"%>
```


```
<%@page contentType="text/html" pageEncoding="UTF-8"%> <!
DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
  "http://www.w3.org/TR/html4/loose.dtd">
<html>
   <head>
      <meta http-equiv="Content-Type" content="text/html;
      charset=UTF-8"> <title>Exam Report</title>
   </head>
   <body bgcolor="cyan">
      <center><h1>Your Report
Card</h1></center> <%@ page language="java"
%> <%@ page import ="java.sql.*" %>
<%
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
String sTable = "exam";
String sSql = "SELECT * FROM " + sTable + "";
String database = "jdbc:odbc:sDBQ";
Connection cn = null;
Statement st = null;
ResultSet rs = null;
try {
cn = DriverManager.getConnection( database ,"sa",""); st
= cn.createStatement();
rs = st.executeQuery( sSql );
ResultSetMetaData rsmd = rs.getMetaData();
String s1,s2,s3,s4;
int i=1;
int correct=0,incorrect=0,total=0;
out.println("<h2><br><br><center><table border=1 cellpadding=2
cellspacing=2><tr><th>Question</th><th>Your Answer</th><th>Correct
Answer</th><th>Status</th></tr>");
while(rs.next())
{
total++;
s1 = rs.getString(1);
s2 = request.getParameter("opt"+i);
s3 = rs.getString(6);
if(s2.equals(s3))
{   s4="Correct";
   correct++;
}
else
{   s4="Incorrect";
   incorrect++;
}
out.println("<tr><td>"+s1+"</td><td>"+s2+"</td><td>"+s3+"</td><td>"+s4+"</td></tr>");
```

```
i++;
}
out.println("</table><br><br><table><b><tr><td>Correct
Answers</td><td>"+correct+"</td></tr>");
out.println("<tr><td>Incorrect Answers</td><td>"+incorrect+"</td></tr>");
out.println("<tr><td>Total
Questions</td><td>"+total+"</td></tr></table></b></center></h2>");
}
  finally {
try { if( null != rs ) rs.close(); } catch( Exception ex ) {}
try { if( null != st ) st.close(); } catch( Exception ex ) {}
try { if( null != cn ) cn.close(); } catch( Exception ex )
{} }
%>
    </body>
</html>
```

OUTPUT:

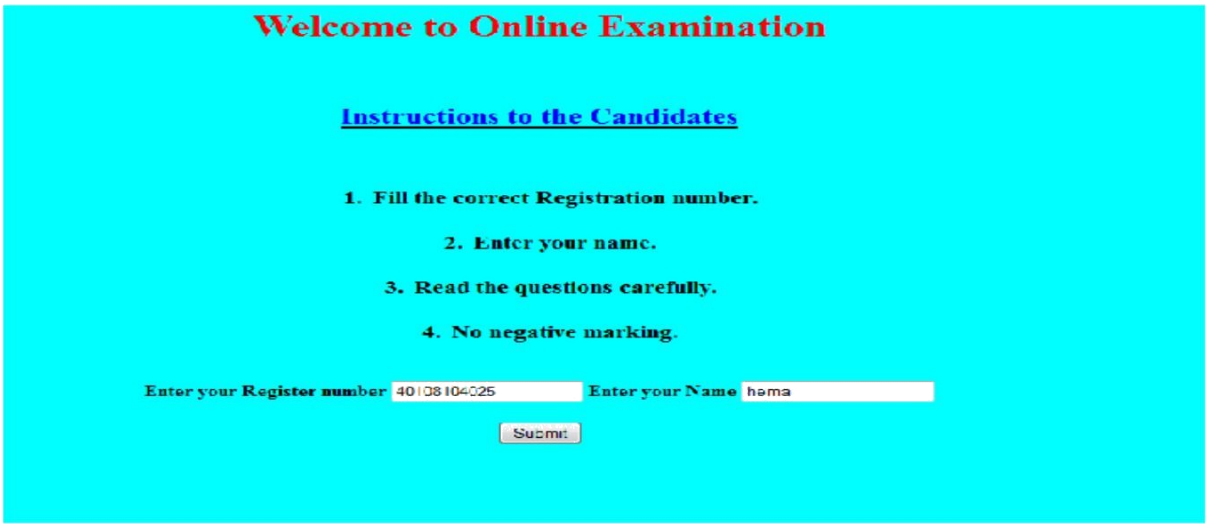
Welcome to Online Examination
Instructions to the Candidates
1. Fill the correct Registration number.
2. Enter your name.
3. Read the questions carefully.
4. No negative marking.
Enter your Register number 40108104025
Enter your Name hema
Submit

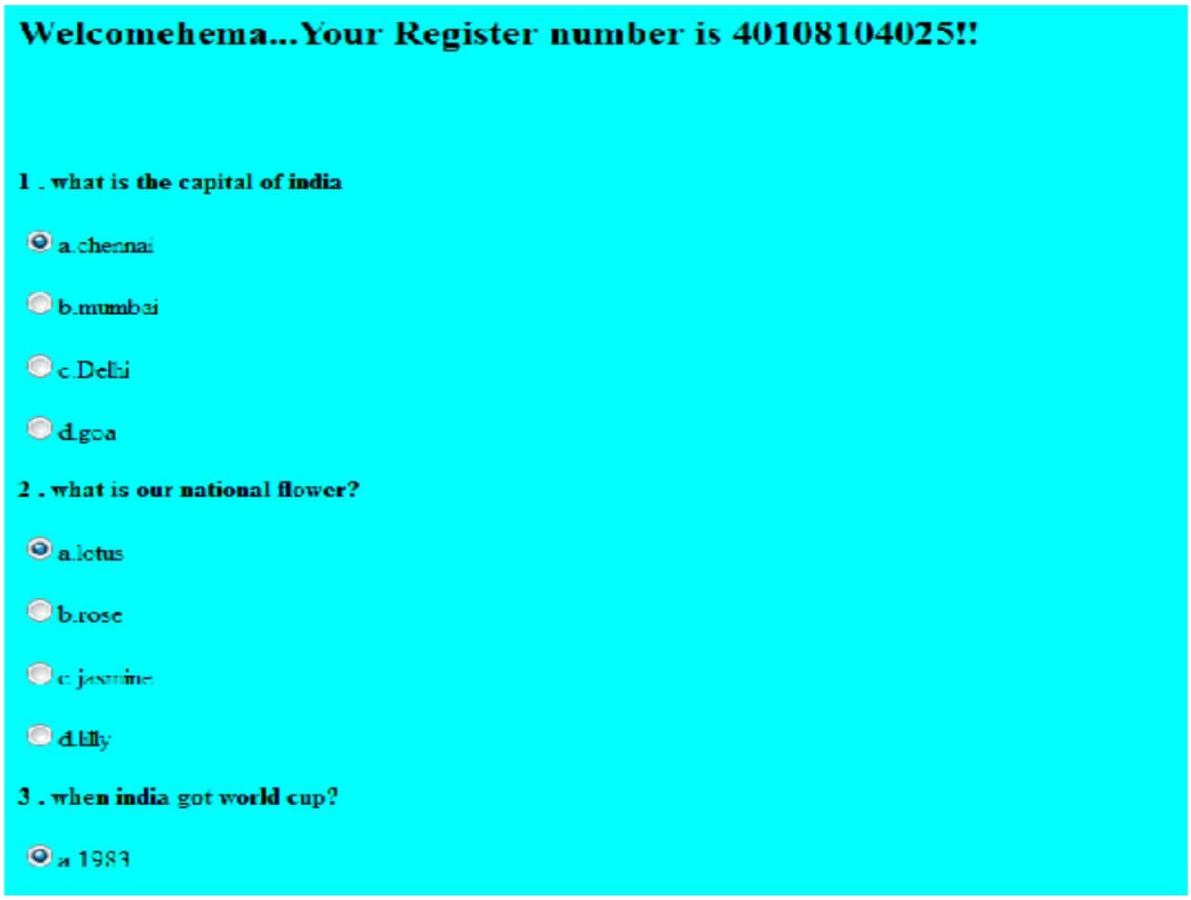
Welcomehema...Your Register number is 40108104025!!
1 . what is the capital of india
a.chennai
b.mumbai
c.Delhi
d.goa
2 . what is our national flower?
a.lotus
b.rose
c.jasmine
d.lilly
3 . when india got world cup?
a.1983

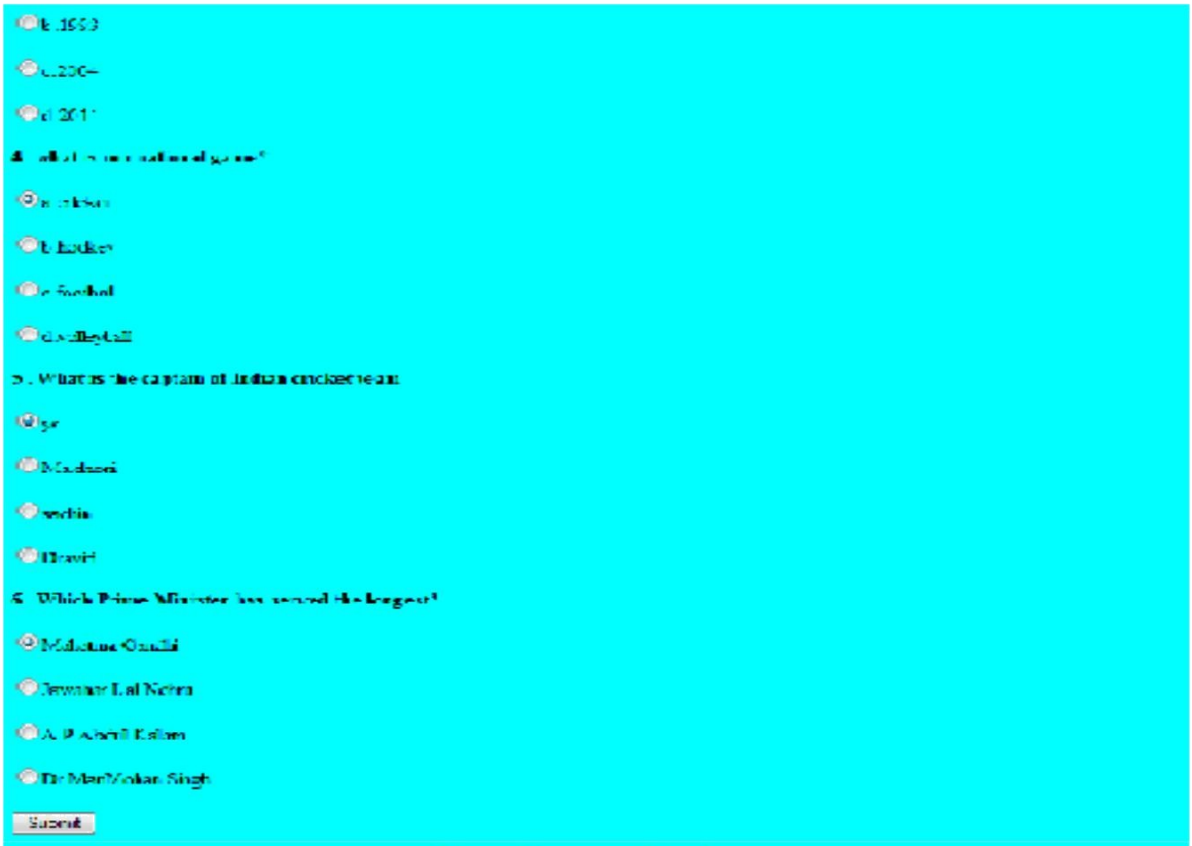

Submit

Your Report Card

Question	Your Answer	Correct Answer	Status
what is the capital of india	c.Delhi	c.Delhi	Correct
what is our national flower?	a.lotus	a.lotus	Correct
when india got world cup?	a.1983	a.1983	Correct
what is our national game?	b.hockey	b.hockey	Correct
What is the captain of Indian cricket team	ys	Ms.dhoni	Incorrect
Which Prime Minister has served the longest?	Mahatma	Jawahar Lal Nehru	Incorrect

Correct Answers 4
Incorrect Answers 2
Total Questions 6

RESULT:

Thus the JSP program for online examination was executed by connecting the SQLSERVER and result was verified

Ex. No: 7

DATE:

XML – Schema – XSLT/XSL

AIM:

To write a XML scheme to generate CD Collection details

ALGORITHM:

Step 1: Start the program
Step 2: Use Xml Style Sheet code to define link <?xml-stylesheet type="text/xsl" href="yourxsl.xsl"?> Step 3: Use the catalog tag to define CD collection details. Step 4: Use the necessary heading for appropriate XML tag. Step 5: Provide necessary information for CD collection details Step 6: Stop the program

SOURCE CODE:

Username.xml

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<!-- Edited by XMLSpy® -->
<?xml-stylesheet type="text/xsl" href="yourxsl.xsl"?>
<catalog>
 <cd>
  <title>Empire Burlesque</title>
  <artist>Bob Dylan</artist>
  <country>USA</country>
  <company>Columbia</company>
  <price>10.90</price>
  <year>1985</year>
 </cd>
 <cd>
  <title>Hide your heart</title>
  <artist>Bonnie Tyler</artist>
  <country>UK</country>
  <company>CBS Records</company>
  <price>9.90</price>
  <year>1988</year>
 </cd>
 <cd>
  <title>Greatest Hits</title>
  <artist>Dolly Parton</artist>
  <country>USA</country>
  <company>RCA</company>
  <price>9.90</price>
  <year>1982</year>
 </cd>
 <cd>
```

```
 <title>Still got the blues</title>
 <artist>Gary Moore</artist>
 <country>UK</country>
 <company>Virgin records</company>
 <price>10.20</price>
 <year>1990</year>
</cd>
<cd>
 <title>Eros</title>
 <artist>Eros Ramazzotti</artist>
 <country>EU</country>
 <company>BMG</company>
 <price>9.90</price>
 <year>1997</year>
</cd>
<cd>
 <title>One night only</title>
 <artist>Bee Gees</artist>
 <country>UK</country>
 <company>Polydor</company>
 <price>10.90</price>
 <year>1998</year>
</cd>
<cd>
 <title>Sylvias Mother</title>
 <artist>Dr.Hook</artist>
 <country>UK</country>
 <company>CBS</company>
 <price>8.10</price>
 <year>1973</year>
</cd>
<cd>
 <title>Maggie May</title>
 <artist>Rod Stewart</artist>
 <country>UK</country>
 <company>Pickwick</company>
 <price>8.50</price>
 <year>1990</year>
</cd>
<cd>
 <title>Romanza</title>
 <artist>Andrea Bocelli</artist>
 <country>EU</country>
 <company>Polydor</company>
 <price>10.80</price>
 <year>1996</year>
```


```
</cd>
<cd>
 <title>When a man loves a woman</title>
 <artist>Percy Sledge</artist>
 <country>USA</country>
 <company>Atlantic</company>
 <price>8.70</price>
 <year>1987</year>
</cd>
<cd>
 <title>Black angel</title>
 <artist>Savage Rose</artist>
 <country>EU</country>
 <company>Mega</company>
 <price>10.90</price>
 <year>1995</year>
</cd>
<cd>
 <title>1999 Grammy Nominees</title>
 <artist>Many</artist>
 <country>USA</country>
 <company>Grammy</company>
 <price>10.20</price>
 <year>1999</year>
</cd>
<cd>
 <title>For the good times</title>
 <artist>Kenny Rogers</artist>
 <country>UK</country>
 <company>Mucik Master</company>
 <price>8.70</price>
 <year>1995</year>
</cd>
<cd>
 <title>Big Willie style</title>
 <artist>Will Smith</artist>
 <country>USA</country>
 <company>Columbia</company>
 <price>9.90</price>
 <year>1997</year>
</cd>
<cd>
 <title>Tupelo Honey</title>
 <artist>Van Morrison</artist>
 <country>UK</country>
 <company>Polydor</company>
```

```
 <price>8.20</price>
 <year>1971</year>
</cd>
<cd>
 <title>Soulsville</title>
 <artist>Jorn Hoel</artist>
 <country>Norway</country>
 <company>WEA</company>
 <price>7.90</price>
 <year>1996</year>
</cd>
<cd>
 <title>The very best of</title>
 <artist>Cat Stevens</artist>
 <country>UK</country>
 <company>Island</company>
 <price>8.90</price>
 <year>1990</year>
</cd>
<cd>
 <title>Stop</title>
 <artist>Sam Brown</artist>
 <country>UK</country>
 <company>A and M</company>
 <price>8.90</price>
 <year>1988</year>
</cd>
<cd>
 <title>Bridge of Spies</title>
 <artist>T`Pau</artist>
 <country>UK</country>
 <company>Siren</company>
 <price>7.90</price>
 <year>1987</year>
</cd>
<cd>
 <title>Private Dancer</title>
 <artist>Tina Turner</artist>
 <country>UK</country>
 <company>Capitol</company>
 <price>8.90</price>
 <year>1983</year>
</cd>
<cd>
 <title>Midt om natten</title>
 <artist>Kim Larsen</artist>
```

```
 <country>EU</country>
 <company>Medley</company>
 <price>7.80</price>
 <year>1983</year>
</cd>
<cd>
 <title>Pavarotti Gala Concert</title>
 <artist>Luciano Pavarotti</artist>
 <country>UK</country>
 <company>DECCA</company>
 <price>9.90</price>
 <year>1991</year>
</cd>
<cd>
 <title>The dock of the bay</title>
 <artist>Otis Redding</artist>
 <country>USA</country>
 <company>Atlantic</company>
 <price>7.90</price>
 <year>1987</year>
</cd>
<cd>
 <title>Picture book</title>
 <artist>Simply Red</artist>
 <country>EU</country>
 <company>Elektra</company>
 <price>7.20</price>
 <year>1985</year>
</cd>
<cd>
 <title>Red</title>
 <artist>The Communards</artist>
 <country>UK</country>
 <company>London</company>
 <price>7.80</price>
 <year>1987</year>
</cd>
<cd>
 <title>Unchain my heart</title>
 <artist>Joe Cocker</artist>
 <country>USA</country>
 <company>EMI</company>
 <price>8.20</price>
 <year>1987</year>
</cd>
</catalog>
```

yourxsl.xsl

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<xsl:stylesheet version="1.0"
xmlns:xsl="http://www.w3.org/1999/XSL/Transform">
<xsl:template match="/">
  <html>
  <body>
    <h2>My CD Collection</h2>
    <table border="1">
      <tr bgcolor="#9acd32">
        <th>Title</th>
        <th>Artist</th>
      </tr>
      <xsl:for-each select="catalog/cd">
      <xsl:sort select="artist"/>
      <tr>
        <td><xsl:value-of select="title"/></td>
        <td><xsl:value-of select="artist"/></td>
      </tr>
      </xsl:for-each>
    </table>
  </body>
  </html>
</xsl:template>
</xsl:stylesheet>
```

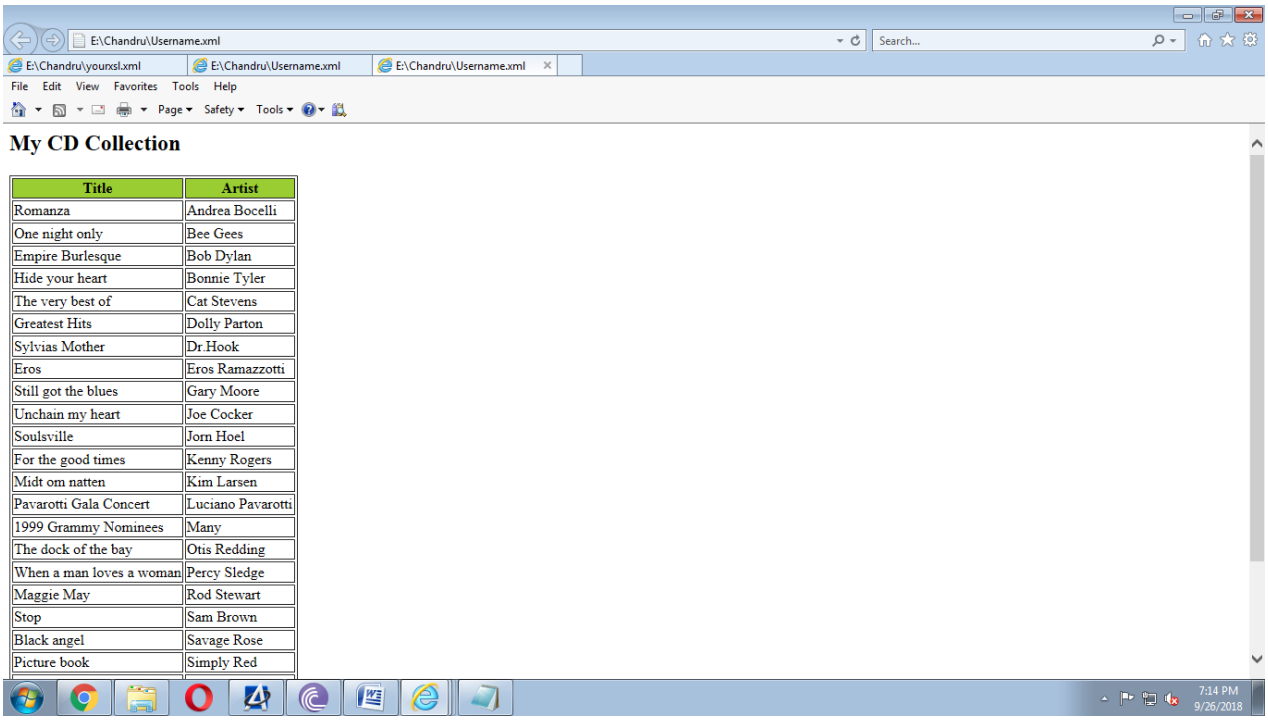

RESULT:

Thus the XML scheme to generate CD Collection details was executed successfully and verified.