

- Expert Verified, Online, Free.

? MENU

?

Google Discussions

Exam Associate Cloud Engineer All Questions

View all questions & answers for the Associate Cloud Engineer exam

Go to Exam

EXAM ASSOCIATE CLOUD ENGINEER TOPIC 1 QUESTION 84 DISCUSSION

Actual exam question from Google's Associate Cloud Engineer

Question #: 84

Topic #: 1

[All Associate Cloud Engineer Questions]

You have a Google Cloud Platform account with access to both production and development projects. You need to create an automated process to list all compute instances in development and production projects on a daily basis. What should you do?

- A. Create two configurations using gcloud config. Write a script that sets configurations as active, individually. For each configuration, use gcloud compute instances list to get a list of compute resources.
- B. Create two configurations using gsutil config. Write a script that sets configurations as active, individually. For each configuration, use gsutil compute instances list to get a list of compute resources.
- C. Go to Cloud Shell and export this information to Cloud Storage on a daily basis.
- D. Go to GCP Console and export this information to Cloud SQL on a daily basis.

Show Suggested Answer

by ?cloudenthu01 at June 25, 2020, 7:55 p.m.

Comments

Type your comment...


Submit

ٺ	? cloudenthu01 Highly Voted 2 4 years, 3 months ago A is correct
	? ? upvoted 38 times
?	 glam Highly Voted 2 4 years ago A. Create two configurations using gcloud config. Write a script that sets configurations as active, individually. For each configuration, use gcloud compute instances list to get a list of compute resources. ? ? upvoted 15 times
?	BAofBK Most Recent 11 months, 2 weeks ago
	A is the best ? ? upvoted 1 times
?	Captain1212 1 year, 1 month ago
	Selected Answer: A
	A is correct, first list, then acitvate it ? ? upvoted 3 times
?	? Neha_Pallavi 1 year, 1 month ago
	A. Create two configurations using gcloud config. Write a script that sets configurations as active, individually. For each configuration, use gcloud compute instances list to get a list of compute resources. ? ? upvoted 1 times
	·
?	Trainingexam 1 year, 3 months ago
	Selected Answer: A
	Activate each config and list the instances ?
[3]	·
ك	Partha117 1 year, 7 months ago
	Selected Answer: A A is correct
	? ? upvoted 1 times
[2]	·
ڬ	Buruguduystunstugudunstuy 1 year, 8 months ago
	Answer A is the correct answer.
	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects,
	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects.
[6	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. [2] [2] [2] upvoted 10 times
?	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ? ? ? upvoted 10 times ? Shwom 1 year, 8 months ago
?	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ? ? ? upvoted 10 times ? Shwom 1 year, 8 months ago Selected Answer: A A is correct
	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ? ? ? upvoted 10 times ? Shwom 1 year, 8 months ago Selected Answer: A A is correct ? ? 2 upvoted 1 times
	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② upvoted 10 times ③ Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② upvoted 1 times ② cslince 1 year, 10 months ago
	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② upvoted 10 times ③ Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ② cslince 1 year, 10 months ago
	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② upvoted 10 times ② Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ② cslince 1 year, 10 months ago Selected Answer: A A is correct
?	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② upvoted 10 times ② Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ② cslince 1 year, 10 months ago Selected Answer: A A is correct
?	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② upvoted 10 times ③ Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② 1 upvoted 1 times ② cslince 1 year, 10 months ago Selected Answer: A A is correct ② ② 1 upvoted 1 times ③ 1 upvoted 1 times ② 1 upvoted 1 times
?	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② upvoted 10 times ③ Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ② cslince 1 year, 10 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ③ leogor 1 year, 11 months ago Selected Answer: A
?	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② upvoted 10 times ③ Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ③ cslince 1 year, 10 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ② leogor 1 year, 11 months ago Selected Answer: A gcloud instead of gsutil
?	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② upvoted 10 times ③ Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ② cslince 1 year, 10 months ago Selected Answer: A A is correct ② ② ② upvoted 1 times ③ leogor 1 year, 11 months ago Selected Answer: A gcloud instead of gsutil
?	Answer A is the correct answer. The most straightforward way to list all compute instances in development and production projects is to use gcloud compute instances list command. However, since the account has access to both production and development projects, it's necessary to create two configurations with different project IDs. Answer B is incorrect because gsutil is used for object storage operations and not compute instances. (DISTRACTOR) Answers C and D are incorrect because they do not provide a straightforward solution for listing compute instances in multiple projects. ② ② ② pupvoted 10 times ③ Shwom 1 year, 8 months ago Selected Answer: A A is correct ② ② ② pupvoted 1 times ③ cslince 1 year, 10 months ago Selected Answer: A A is correct ② ② ② pupvoted 1 times ③ leogor 1 year, 11 months ago Selected Answer: A gcloud instead of gsutil ② ② ② pupvoted 1 times

? ? upvoted 3 times

 Shlok27_gcloud 2 years, 1 month ago Which one is correct in all cases, suggested one or community one. Im confused totally for all questions in upvoted 2 times
 ? habros 2 years, 2 months ago A. Gsutil is used for cloud storage bucket ? ? upvoted 1 times
 ? AzureDP900 2 years, 4 months ago A is right, This is part of Tutorial Dojo practice questions ? ? upvoted 4 times
 ? haroldbenites 2 years, 4 months ago Go for A ? ? upvoted 1 times
? cysteine 2 years, 6 months ago
Selected Answer: A Obviously A is correct 2 2 upvoted 1 times
 ? RegisFTM 2 years, 10 months ago This looks to be a multiple-choice question. The answer A is correct, and the C completes the task Does it make sense? ? ? upvoted 1 times
? Zufair 2 years, 9 months ago C is not automated task
A is correct ? ? vupvoted 3 times Load full discussion

Start Learning for free

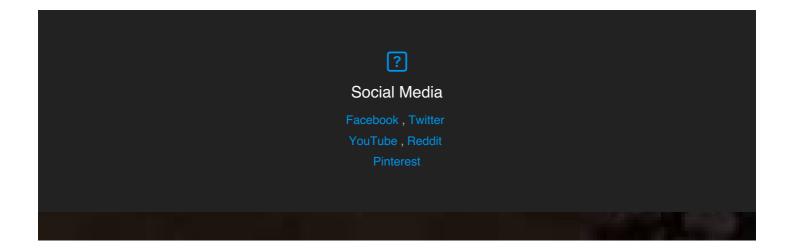



We are the biggest and most updated IT certification exam material website.

Using our own resources, we strive to strengthen the IT professionals community for free.



© 2024 ExamTopics

ExamTopics doesn't offer Real Microsoft Exam Questions. ExamTopics doesn't offer Real Amazon Exam Questions. ExamTopics

Materials do not contain actual questions and answers from Cisco's Certification Exams.

CFA Institute does not endorse, promote or warrant the accuracy or quality of ExamTopics. CFA® and Chartered Financial Analyst® are registered trademarks owned by CFA Institute.