Mean squared error on identical six-method dataset IDs

strict_order | a | n=20

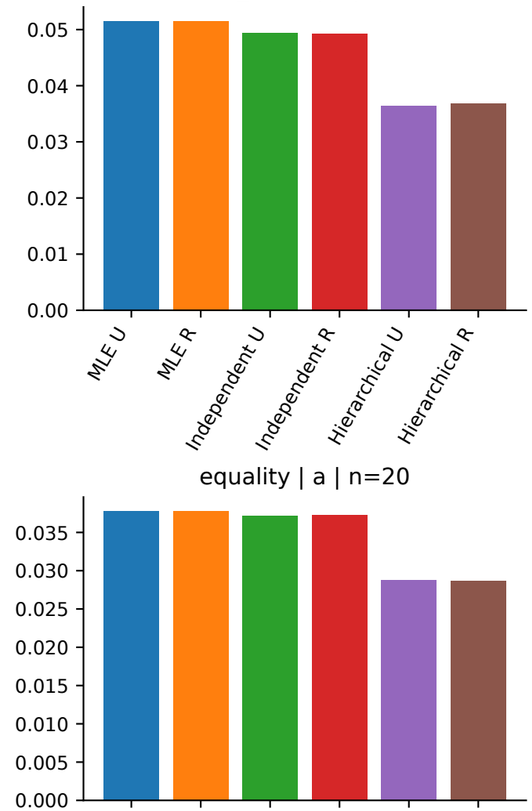

strict_order | b1[A] | n=20

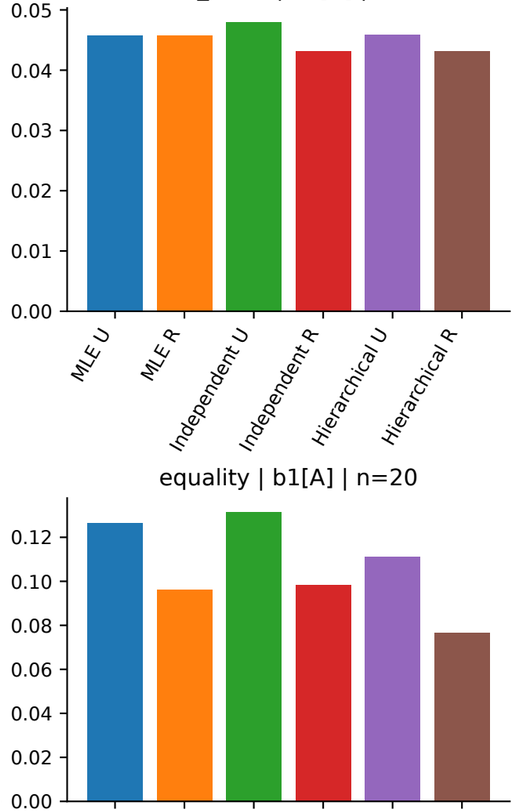

strict_order | b2[A] | n=20

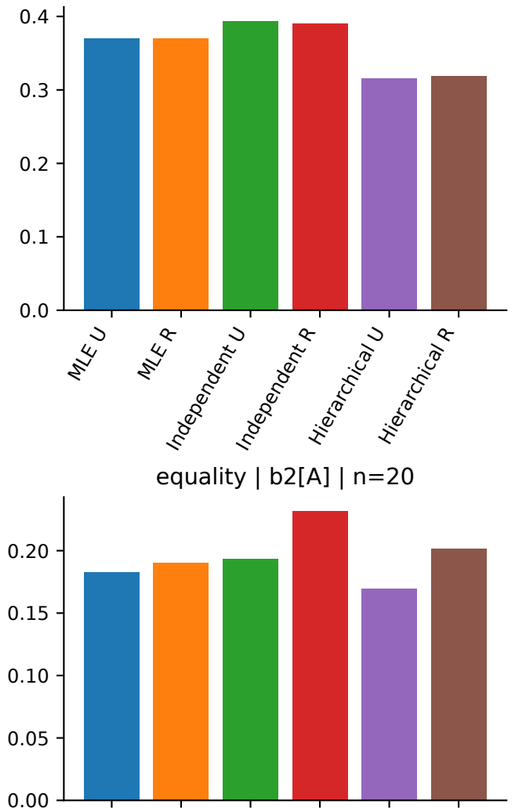

strict_order | b1[B] | n=20

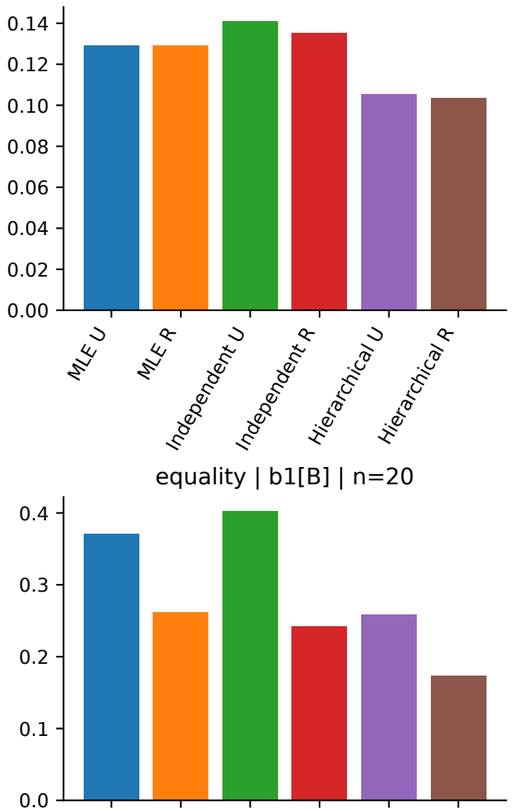

strict_order | b2[B] | n=20

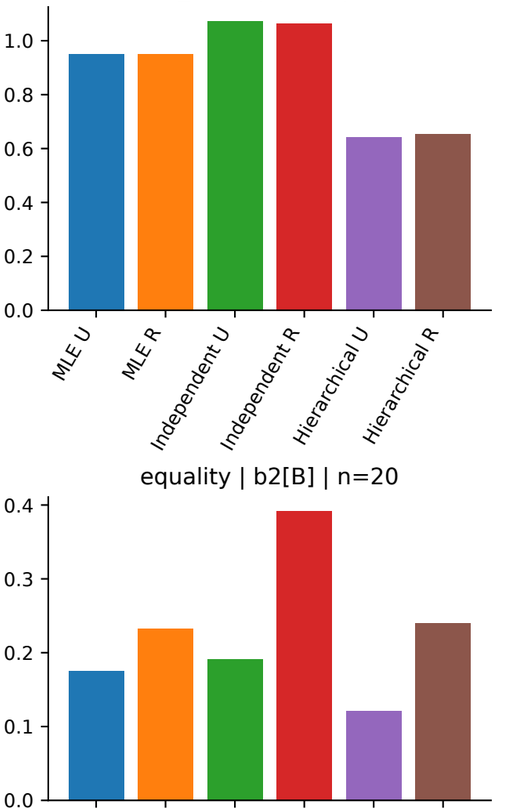

equality | a | n=20

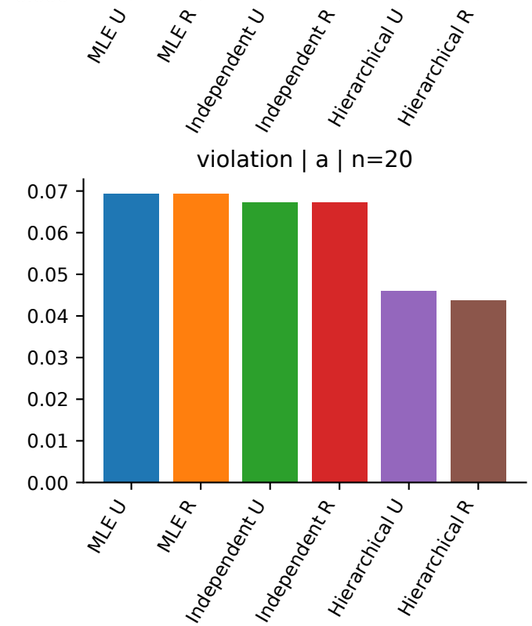

equality | b1[A] | n=20

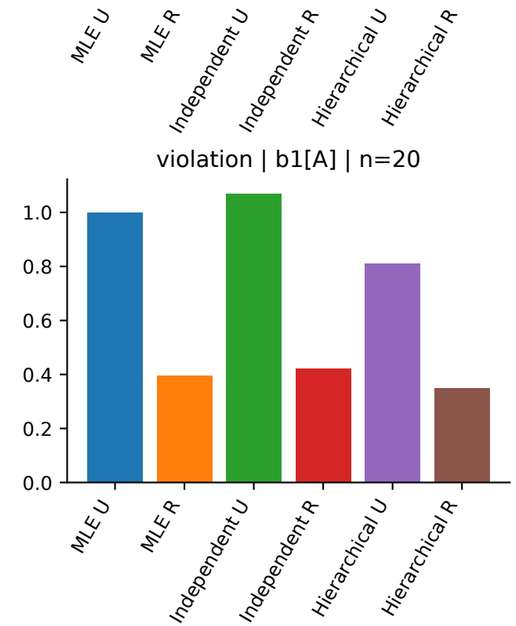

equality | b2[A] | n=20

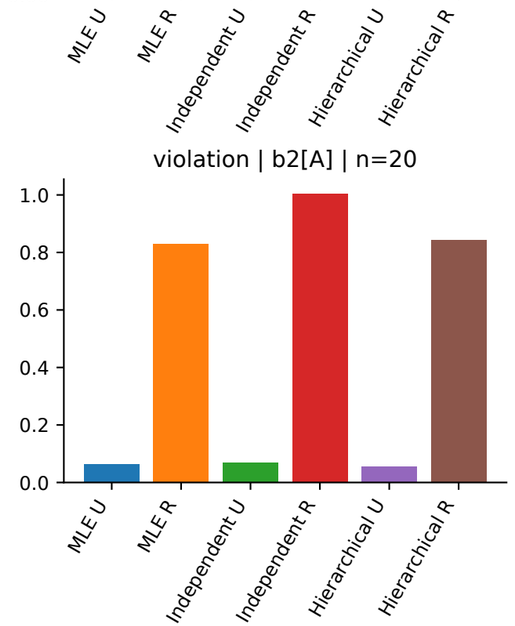

equality | b1[B] | n=20

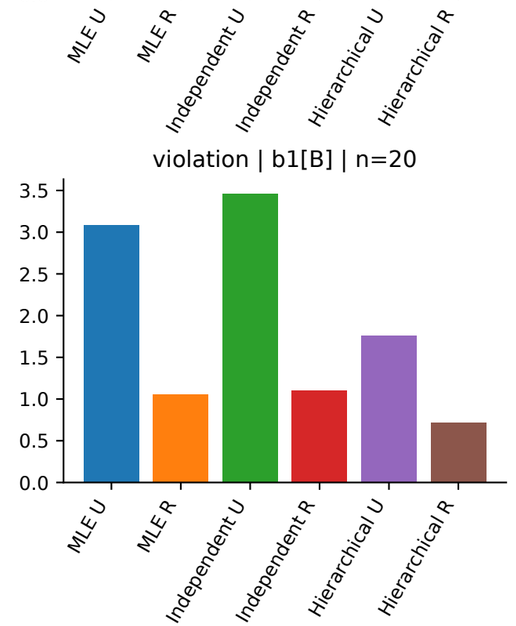

equality | b2[B] | n=20

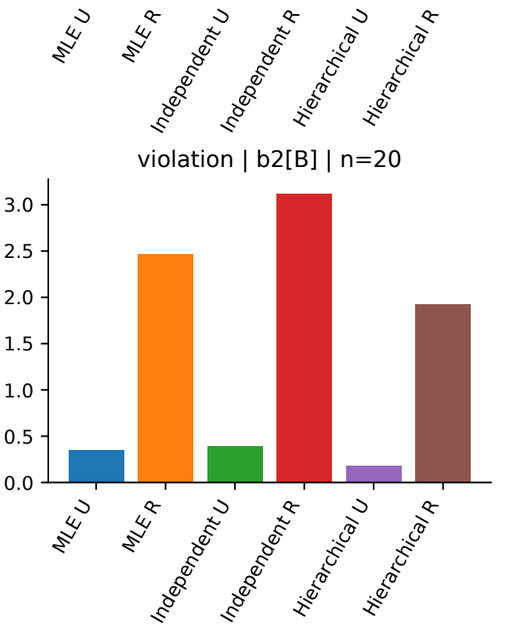

violation | a | n=20

violation | b1[A] | n=20

violation | b2[A] | n=20

violation | b1[B] | n=20

violation | b2[B] | n=20