

Behavioral Patterns

“Code with Passion!”



Behavioral Patterns

Patterns that are concerned with communication between objects

- Strategy pattern
- Template method pattern
- Visitor pattern
- Command pattern
- Chain of responsibility pattern
- Observer pattern
- Mediator pattern
- Null object pattern
- Iterator pattern

Strategy Pattern

Strategy Pattern (Policy Pattern)

- What is it?
 - > In Strategy pattern, behavior (algorithm) can be changed at runtime
- How to do it?
 - > Create objects which represent various strategies and a context object whose behavior varies as per its strategy object
- When to use it?
 - > Use it when different behavior (algorithm) needs to be selected during runtime


Example Scenario

- We are online shopping site
 - > We want our customers to be able to use whatever payment scheme of their choice – paypal, credit card, cash
- Future changes (without violating Open-Closed principle)
 - > We want to be able to handle new payment scheme: ApplePay, Square, etc

Participants

- Strategy (abstraction – Java interface or abstract class)
 - > Declares an interface common to all supported behaviors (algorithms)
 - > Context uses this interface to call the behavior (algorithm) implemented by a ConcreteStrategy
- ConcreteStrategies (concrete classes)
 - > Implement the concrete behavior (algorithm)
- Context
 - > Maintains a reference to a Strategy object
- Client
 - > Select a particular concrete strategy during runtime and create a context object with it

Strategy Pattern

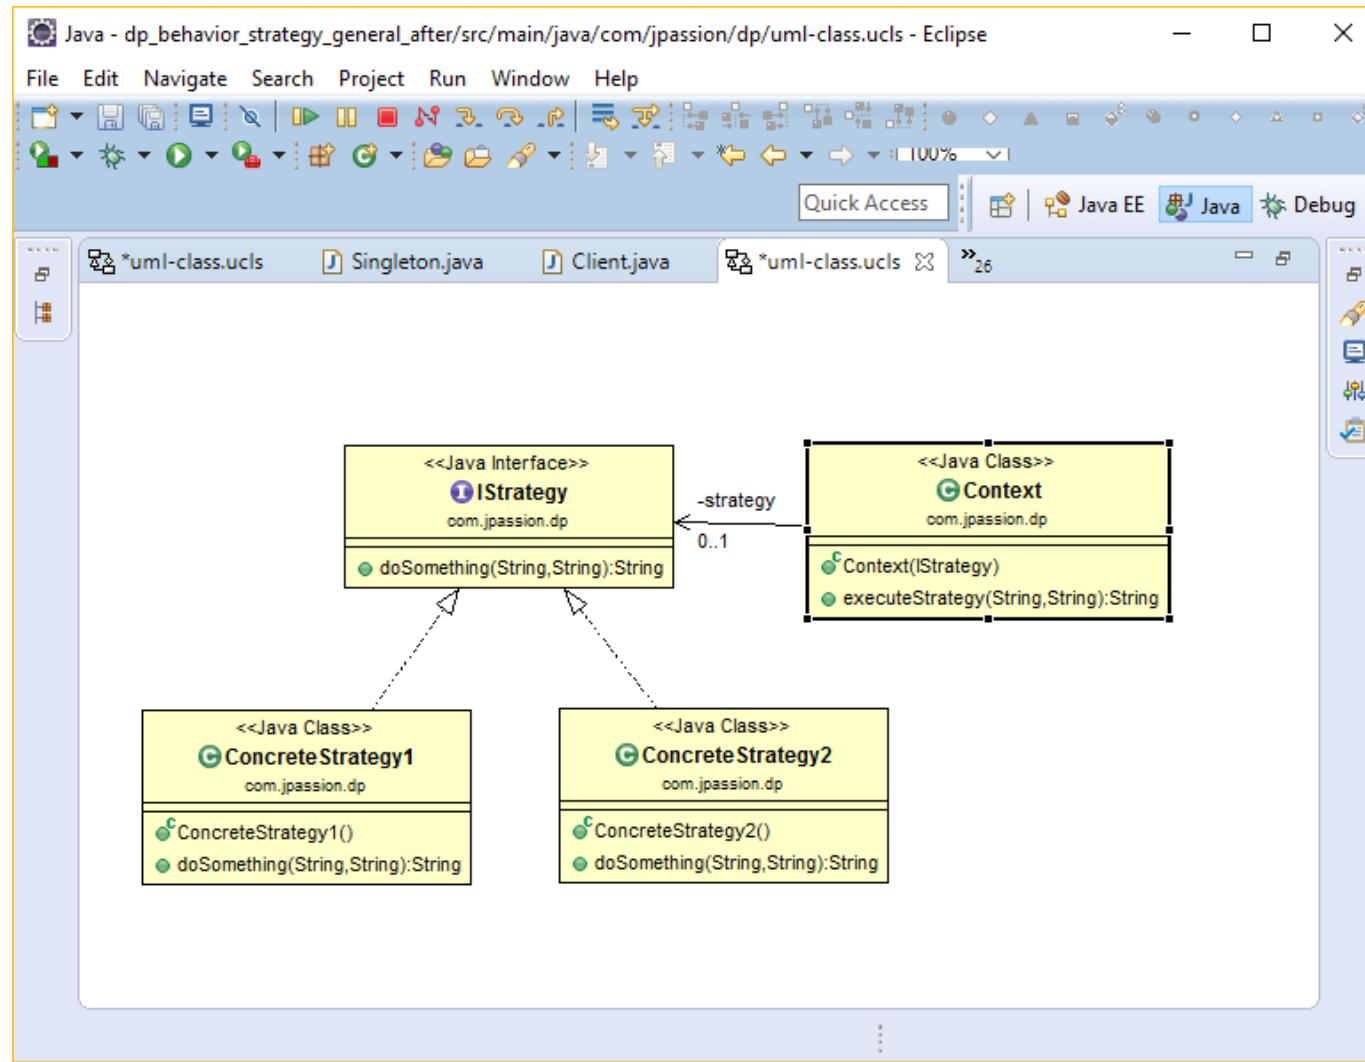

Lab:

Exercise 1: Strategy Pattern
9004_dp_behavior.zip



Template Method Pattern

Template method pattern

- What is it?
 - > An abstract class that exposes **a defined way to execute its methods** (i.e., a predetermined sequence of methods) in the form of a template method
 - > Its subclasses can override the method implementation as per need, but the invocation is to be in the same way as defined by the template method in the abstract class
- When to use it?
 - > Use it **to implement the non-changing parts of an algorithm** once and leave it up to subclasses to implement the behavior that can vary


Example Scenarios of Template Method

- We are a Pizza company – we have regional Pizza franchises
 - > We want to make sure all regional pizza franchises to follow a same sequence of steps (operations) for handling pizza order at the store
 - > We want to give them some freedom in handling some steps (operations) – maybe regional franchises want to use regionally flavored ingredients
 - > We want to make sure all regional franchises to handle a certain set of operations the same – maybe taking payment should be implemented the same since they are connected to corporate financial system
- Future changes (without violating Open Close principle)
 - > We would like to add new regional franchises

Participants

- **AbstractClass**
 - > Define a template method in which a sequence of methods are invoked in a specified way
 - > Defines abstract methods that need to be implemented by subclasses
 - > Could define concrete methods that can be shared by subclasses
- **ConcreteClasses**
 - > Implement abstract methods of the AbstractClass

Template method pattern

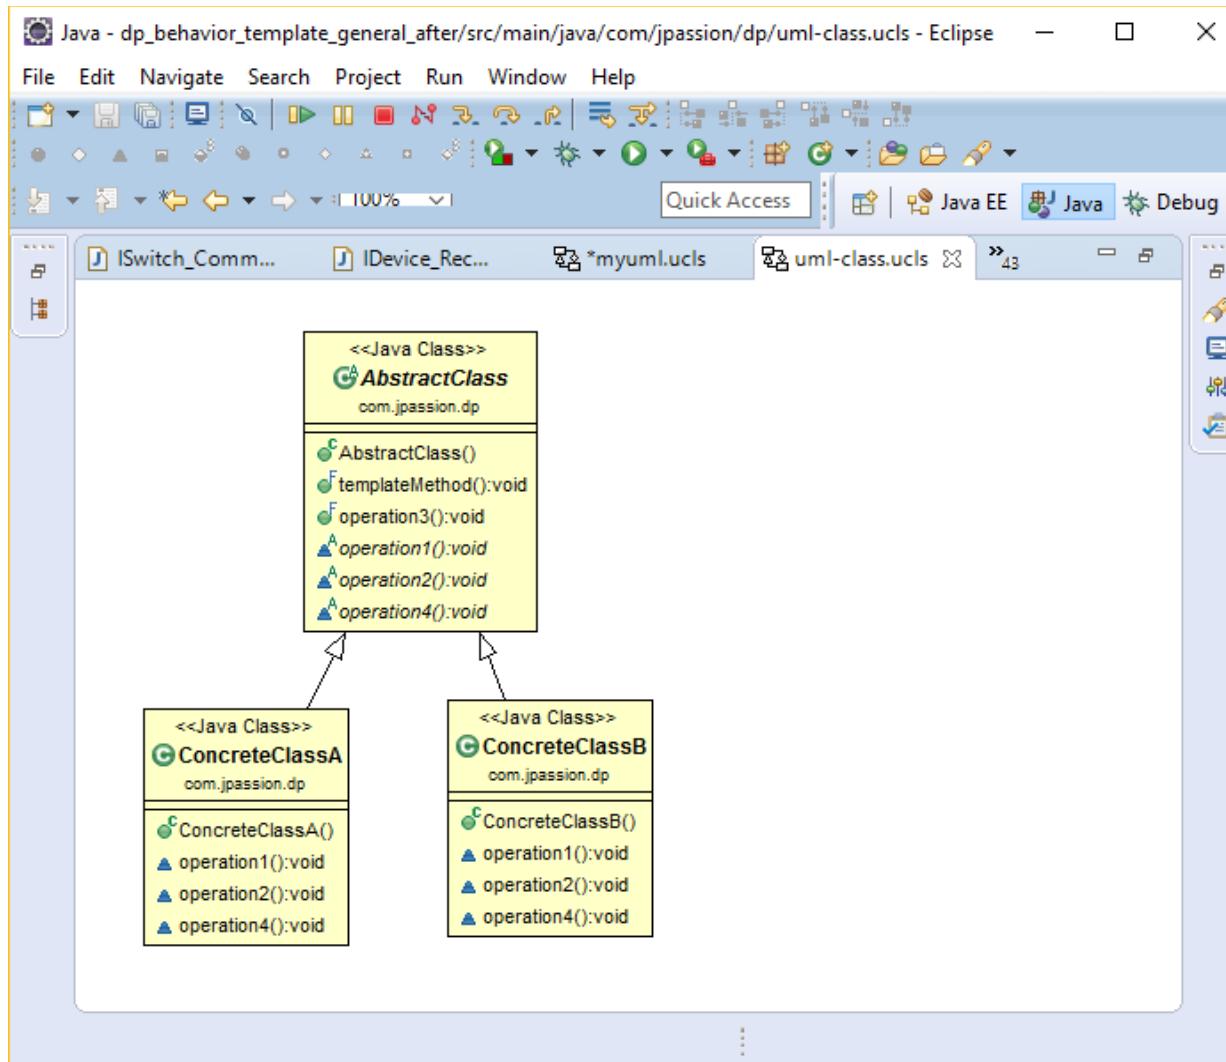

Lab:

Exercise 2: Template Pattern
9004_dp_behavior.zip



Visitor Pattern

Visitor Pattern

- What is it?
 - > Visitor pattern allows an **operation** to be performed (represented by **Visitor**) on **elements** of an object structure (represented by **Visitable**)
 - > Visitor lets you define a new operation without changing the classes of the elements on which it operates (**Visitable**)
- When to use it?
 - > Use it when different set of operations need to be performed to elements of an object structure

Example Scenario

- We are Car manufacturer
- Car is made of many parts
 - > Engine
 - > Body
 - > Four wheels
- We need to perform various set of operations against these parts
 - > We need to purchase each of them
 - > We need to assemble each of them
 - > We need to record the price of each of them
- Future changes (without violating Open Close principle)
 - > We want to perform another operation to these parts


Participants (1)

- Visitor (abstraction)
 - > Declare the visit operations
 - > Usually the name of the operation is the same and the operations are differentiated by the method signature
- ConcreteVisitor's (Concrete class)
 - > Each concrete visitor has a set of operations – different visitor has a different set of operations
 - > A concrete visitor is passed to the object structure (Visitable)
 - > A new concrete visitor can be created and passed to the object structure (Visitable) without forcing change in the object structure – open close principle

Participants (2)

- Visitable (an abstraction)
 - > An abstraction which declares the *accept* operation. This is the entry point which enables an object to be "visited" by the visitor object
 - > Each object from a collection implements this abstraction in order to be able to be visited
- ConcreteVisitable (Concrete class)
 - > Defines the accept operation, through which visitor object is passed
- ConcreteVisitableGroup (Concrete class)
 - > This is a class containing all the objects that can be visited. It offers a mechanism to iterate through all the elements
 - > This structure is not necessarily a collection. It can be a complex structure, such as a composite object.

Visitor Pattern

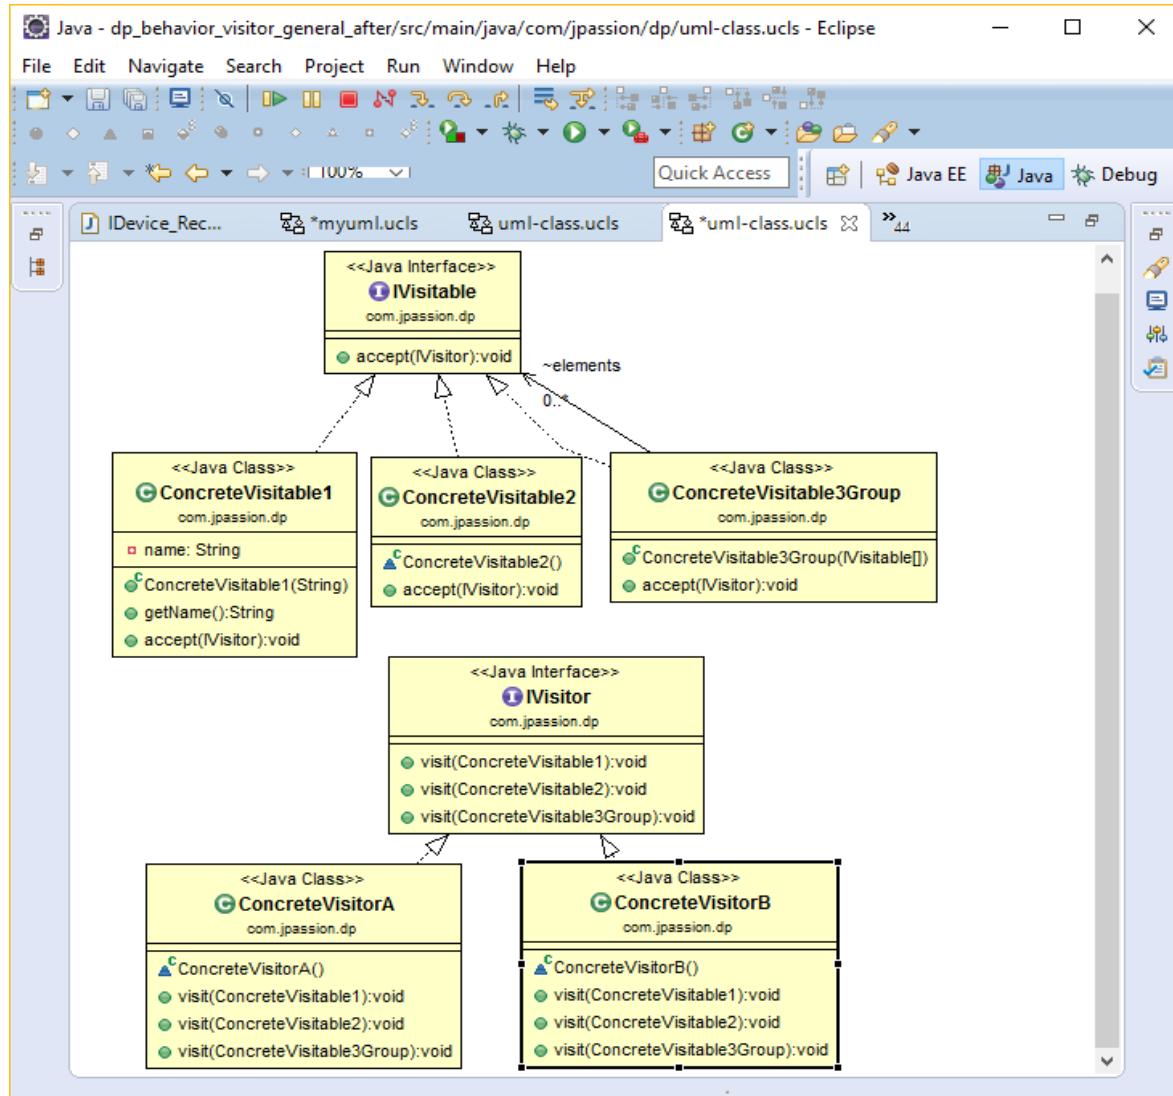

Lab:

Exercise 3: Visitor Pattern
9004_dp_behavior.zip



Command Pattern

Command Pattern

- What is it?
 - > Encapsulate a request in an object (command object) - In command pattern, a command object is used to **encapsulate all information needed to perform an action**, which includes the method name, the object that owns the method and values for the method parameters.
 - > Allows **bookkeeping of the requests**
- When to use it?
 - > When requests need to be executed in a controlled manner – i.e. **as a batch, at a scheduled time, based on conditions, undo a request**


Example Scenario of Command Pattern

- Waiter (or Restaurant) has to take several orders from the customers
 - > Drink orders
 - > Food orders
- Some orders can be canceled
- Waiter might want to take the drink order first and then food order later or s/he might take all orders at the same time
 - > Or restaurant want to prepare these orders individually or in a batch
- In other words, these orders need to be collected first and then might get executed in different execution schemes
- Future changes (without violating Open Close principle)
 - > Different schemes (such as mobile orders) need to be handled differently than in-store orders

Participants

- Command (Interface)
 - > Declares an interface for executing an operation – `execute()` method
- ConcreteCommand's (Concrete classes)
 - > Encapsulates a concrete request
 - > References a Receiver
 - > Implementing the `execute()` method of Command interface – the `execute()` method contains code invoking the corresponding operations of the Receiver
- Receiver (Concrete class)
 - > Knows how to perform the operations
- Invoker (Concrete class)
 - > Does bookkeeping of commands – it plays a role of “command manager”
 - > Has a method that asks the command to carry out the request calling `execute()` method

Command Pattern

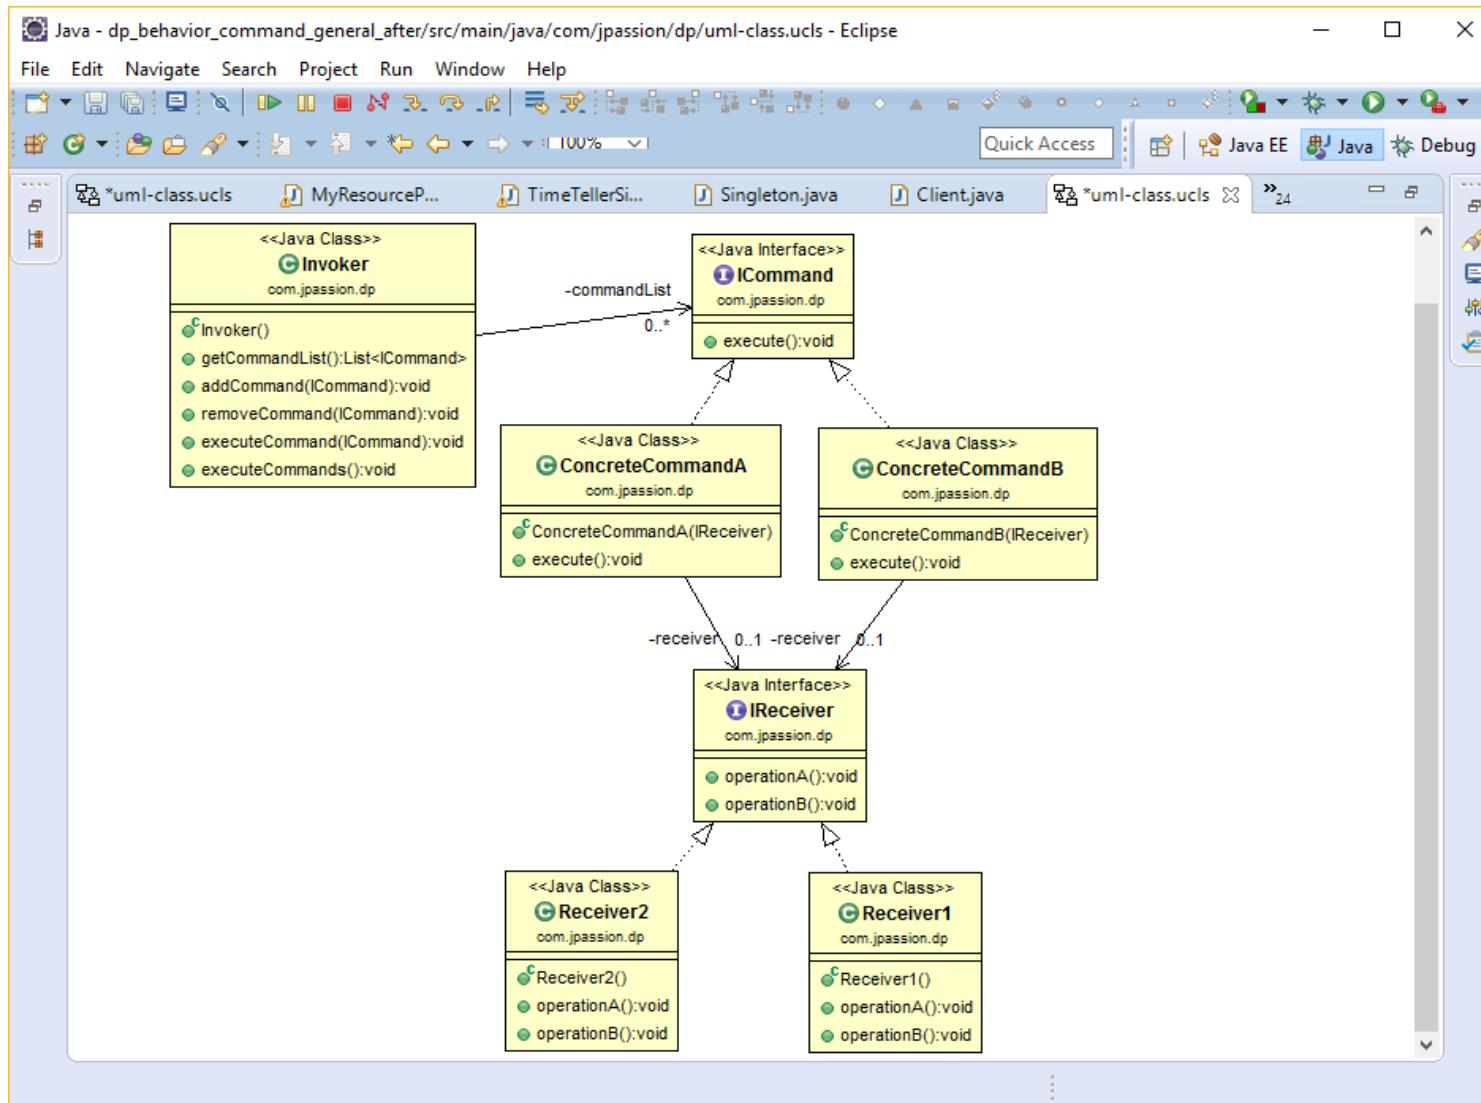

Lab:

Exercise 4: Command Pattern
9004_dp_behavior.zip



Chain of Responsibility Pattern

Chain of Responsibility pattern

- What is it?
 - > Decouples the sender of a request from its receiver by giving more than one object a chance to handle the request
 - > Chain the receiving objects and pass the request along the chain until an object handles it
- When to use it?
 - > Use it when a request can be handled by multiple handlers in a chain


Example Scenario

- A purchase order request should be handled by different roles in a corporation depending on the amount
 - > A purchase order of \$1000 or less can be handled by 1st level manager
 - > A purchase order of \$5000 or less can be handled by a Director
 - > A purchase order of \$10000 or less can be handled by Vice-president
- Future changes (without violating Open Close principle)
 - > Add new roles

Participants

- AbstractHandler
 - > Defines an interface for handling requests
- ConcreteHandler's
 - > Configured with a successor
 - > If it can handle the request it does so, otherwise it sends the request to its successor
- Client
 - > Sends requests to the first handler in the chain that may handle the request

Chain of Responsibility

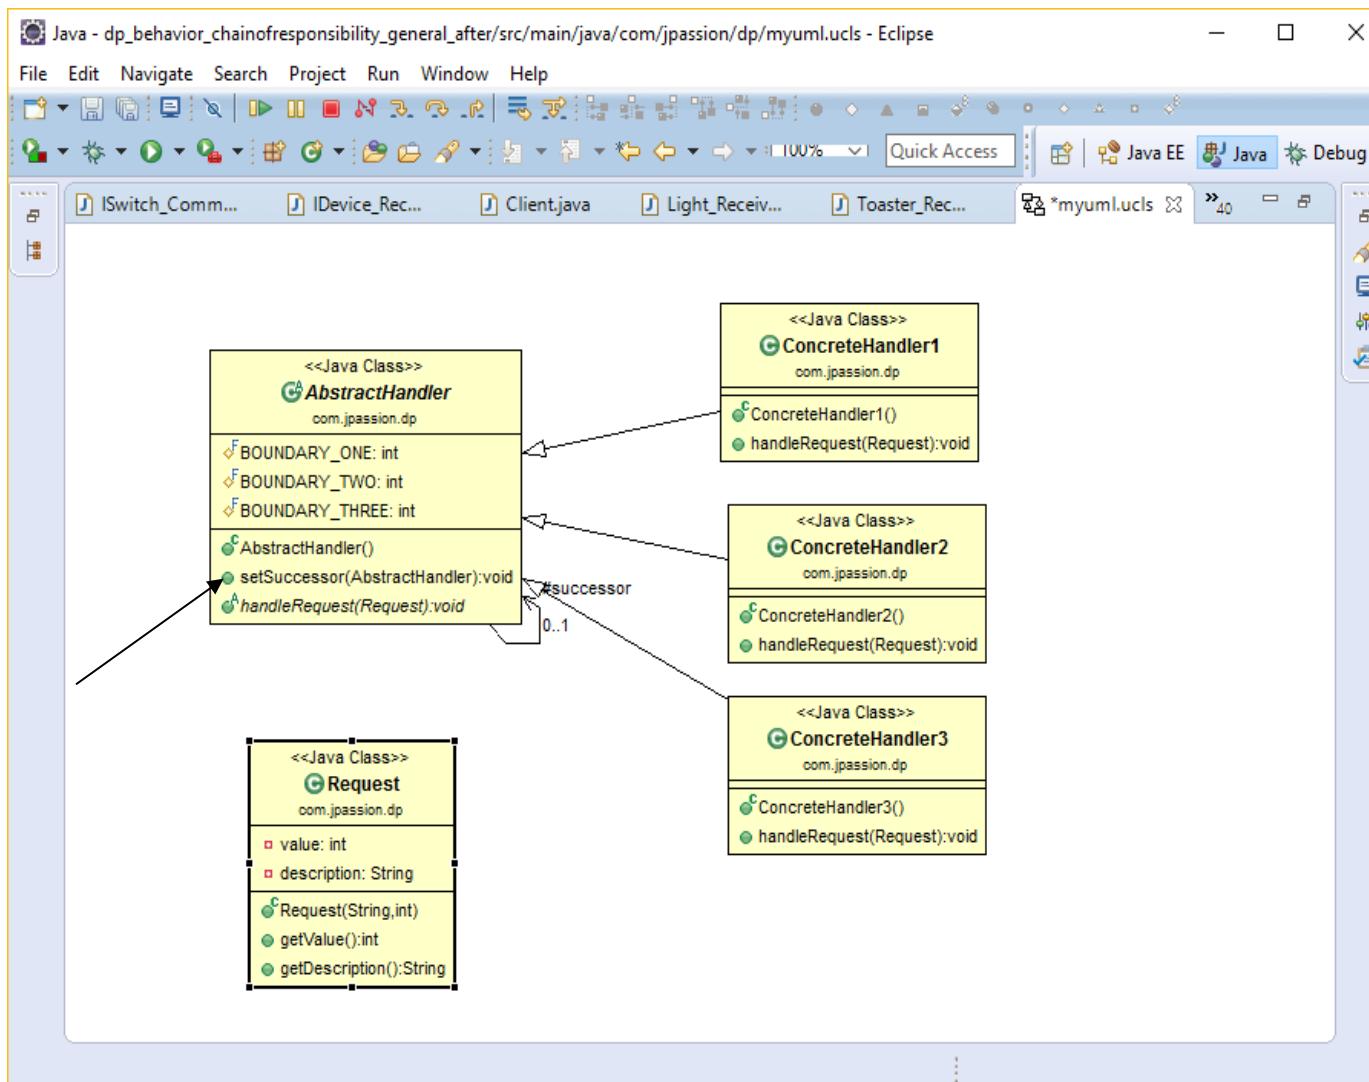

Lab:

**Exercise 5: Chain of
Responsibility Pattern
9004_dp_behavior.zip**



Observer Pattern

Observer pattern

- What is it?
 - > Define a one-to-many dependency between objects where a state change in one object results in all its dependents being notified and updated automatically
- When to use it?
 - > Use it to implement distributed event handling systems


Example Scenario

- When a new employee is hired, various parties need to be notified
 - > Payroll department need to be notified
 - > Facility department need to be notified so that office and phone can be arranged
- Future changes (without violating Open Close principle)
 - > Add another department to be notified

Participants

- Observable
 - > Interface or abstract class defining the operations for attaching and detaching observers to the client.
- ConcreteObservable
 - > Concrete Observable class. It maintains the state of the object and when a change in the state occurs it notifies the attached Observers
 - > This is called Subject
- Observer
 - > Interface or abstract class defining the operations to be used to notify this object
- ConcreteObserver classes
 - > Concrete Observer implementations

Observable Pattern

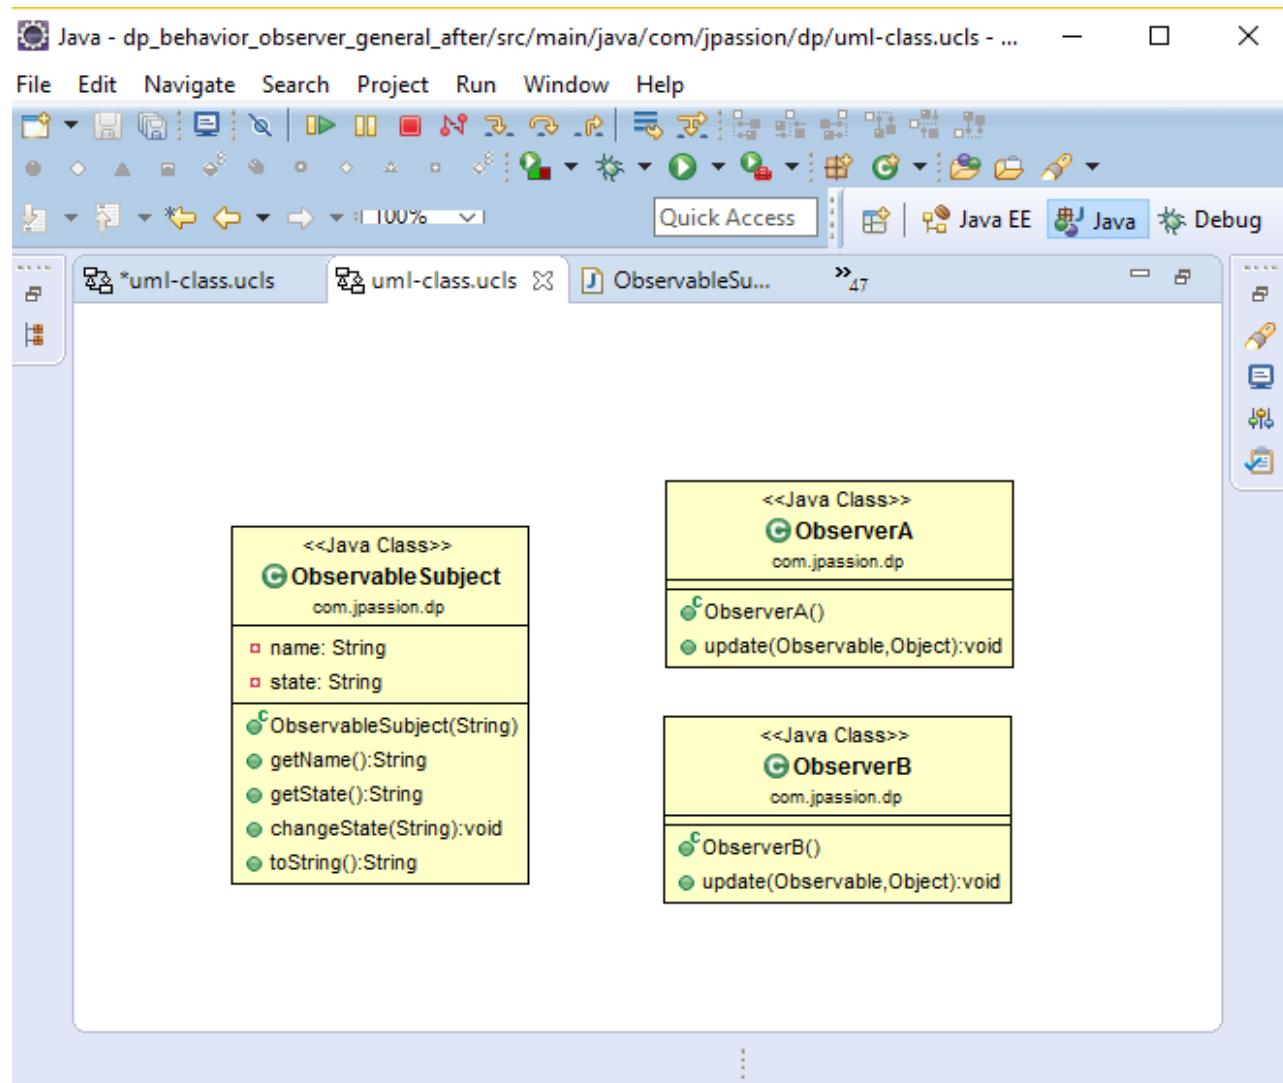

Lab:

Exercise 6: Observer Pattern
9004_dp_behavior.zip



Mediator Pattern

Mediator pattern

- What is it?
 - > Define an object (mediator) that encapsulates how a set of objects interact
- When to use it?
 - > Use it when loose coupling is desired between communicating objects by keeping objects from referring to each other explicitly and it lets you vary their interaction independently


Example Scenario

- Chatting among people can be handled through a ChatRoom as a mediator
 - > ChatRoom is responsible for receiving and posting messages between chatters
 - > ChatRoom can impose some policies - filter out some vulgar messages
 - > ChatRoom can be also responsible for collecting various information – number of messages, etc
- Future changes (without violating Open Close principle)
 - > Add more chatter types
 - > Add more policies (without forcing changes to the Chatter code)

Participants

- Mediator
 - > Defines the interface for communication between Colleague objects
- ConcreteMediator
 - > Implements the Mediator interface and coordinates communication between Colleague objects
 - > Is aware of all the Colleagues and their purpose with regards to inter communication.
- Colleague classes
 - > Keep a reference to its Mediator object
 - > Communicates with other Colleagues through its Mediator

Mediator Pattern

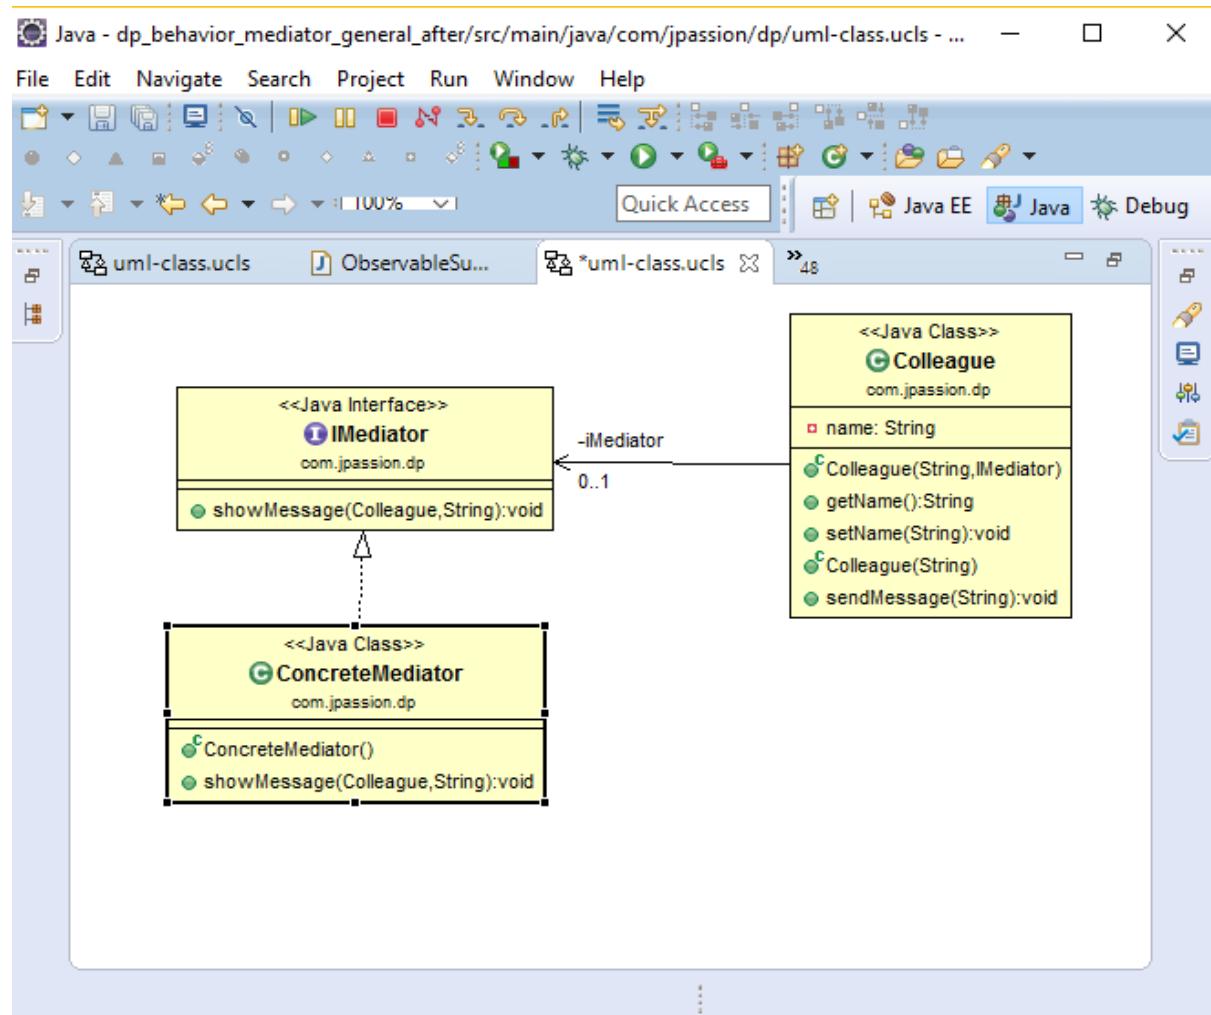

Lab:

Exercise 7: Mediator Pattern
9004_dp_behavior.zip




Null object Pattern

Null Object pattern

- What is it?
 - > Avoid null references by providing a default object
- When to use it?
 - > Use it when checking null reference is not desirable

Null Object pattern

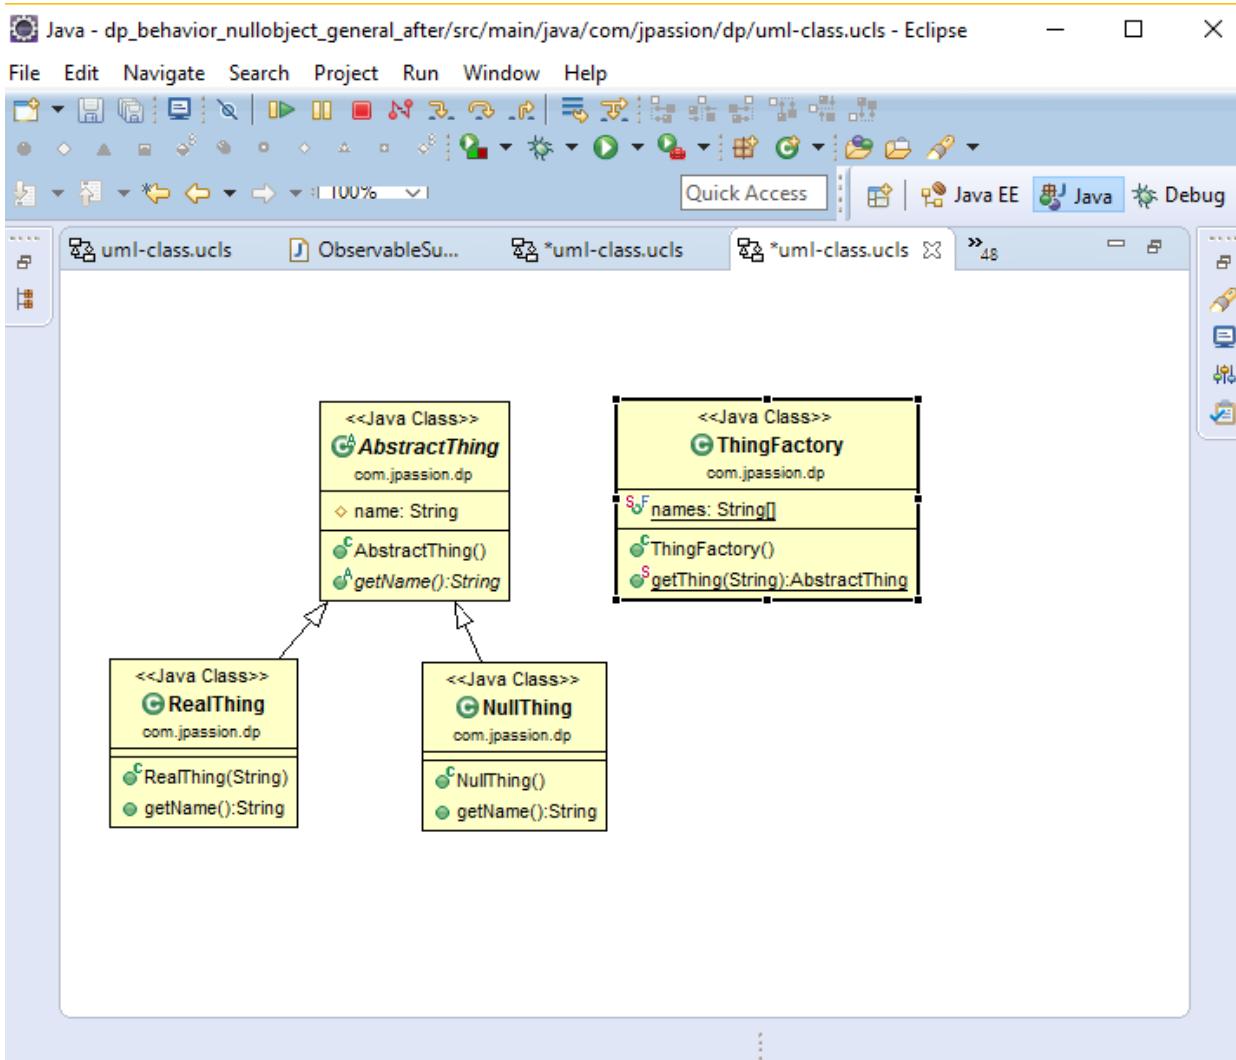

Lab:

Exercise 8: Null Pointer Pattern
9004_dp_behavior.zip



Iterator Pattern


Iterator Pattern

- What is it?
 - > Provide a way to access the elements of an aggregate object sequentially without exposing its underlying representation
- Future changes (without violating Open Close principle)
 - > Change the underlying representation of the aggregate object

Participants

- Iterator interface
 - > Represent the AbstractIterator, defining the iterator
- Concretelterator
 - > Implementation of Iterator
- Container interface
 - > Represents aggregation
 - > Creates Iterator object
- ConcreteContainer
 - > Implements Container interface

Iterator Pattern

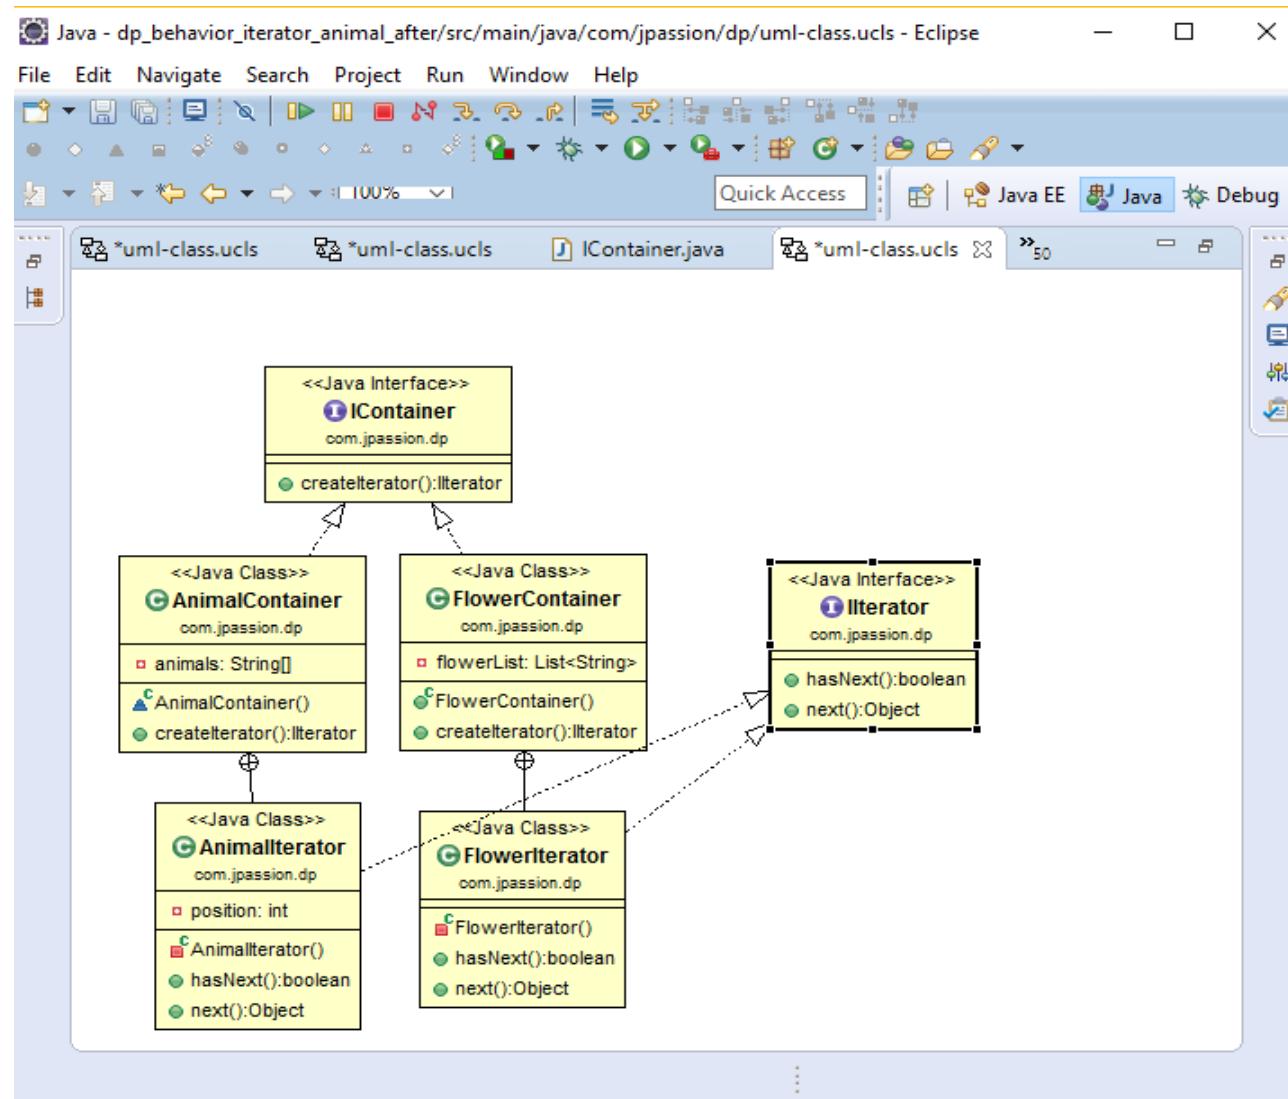

Lab:

Exercise 9: Iterator Pattern
9004_dp_behavior.zip



Code with Passion!

