

Spring Boot

“Code with Passion!”



Topics

- What is and Why Spring Boot?
- Getting started with Spring Boot
- Building a Web app using Spring Boot
- Auto-configuration
- Application properties file
- External configuration
- *SpringApplication* class
- Actuator

What is & Why Spring Boot?

Things You Need for Building Web App

- Build tool (Maven, Gradle, Ant)
- Web framework (i.e. Spring MVC)
- Persistence (JPA, Spring Data)
- Template (JSP, Thymeleaf)
- Database server (MySQL)
- Server platform (Tomcat, Jetty)
- Logging (SLF4J)
- Testing (JUnit, Spring Test)
- ...

Manual Chores of Building Spring App

- Writing build script (Maven, Gradle)
- Version matching among modules
- Configuration of all necessary beans
- Setting up database server
- Setting up a runtime server (Tomcat)
- Writing and configuring management/monitoring features
- ...

What is and Why Spring Boot?

- Provide a radically **faster and widely accessible getting started experience** for all Spring application development
 - > Automating manual chores (based on the idea of “convention over configuration”)
- Use best-practice defaults, but get out of the way quickly as requirements start to diverge from the defaults
- Provide a range of non-functional features that are common to majority of enterprise applications
 - > embedded servers
 - > metrics
 - > health checks
 - > externalized configuration
- Absolutely no code generation and no requirement for XML configuration

Spring Boot is made of

- Spring Boot Tools
 - > Maven, Gradle, Custom Spring Boot loader
- Spring Boot Core
 - > Base for other modules
- Spring Boot Auto Configuration
 - > Handles auto-configuration with sensible defaults
- Spring Boot Actuator
 - > Metrics, security, default error pages
- Spring Boot Starters (<http://start.spring.io>)
 - > Quick starter projects – added Maven or Gradle dependencies
- Spring Boot CLI
 - > Command line tools – start and stop Spring Boot application

Getting Started with Spring Boot

Maven pom.xml - Start with starter-parent

```
<groupId>com.example</groupId>
<artifactId>myproject</artifactId>
<version>0.0.1-SNAPSHOT</version>

<parent>
  <groupId>org.springframework.boot</groupId>
  <artifactId>spring-boot-starter-parent</artifactId>
  <version>1.4.3.RELEASE</version>
  <relativePath/> <!-- lookup parent from repository -->
</parent>

<!-- Add typical dependencies for a web application -->
<dependencies>
  <dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-web</artifactId>
  </dependency>
</dependencies>
```

...

Dependencies added by Starter parent (mvn dependency: tree)

```
cmd
[<1> cmd <2> cmd - mvn spri... <3> cmd <4> cmd] Search
[INFO]
[INFO] --- maven-dependency-plugin:2.9:tree (default-cli) @ gs-spring-boot ---
[INFO] org.springframework:gs-spring-boot:jar:0.1.0
[INFO] +- org.springframework.boot:spring-boot-starter-web:jar:1.1.10.RELEASE:compile
[INFO] |  +- org.springframework.boot:spring-boot-starter:jar:1.1.10.RELEASE:compile
[INFO] |  |  +- org.springframework.boot:spring-boot:jar:1.1.10.RELEASE:compile
[INFO] |  |  +- org.springframework.boot:spring-boot-autoconfigure:jar:1.1.10.RELEASE:compile
[INFO] |  |  +- org.springframework.boot:spring-boot-starter-logging:jar:1.1.10.RELEASE:compile
[INFO] |  |  +- org.slf4j:jcl-over-slf4j:jar:1.7.7:compile
[INFO] |  |  |  \- org.slf4j:slf4j-api:jar:1.7.7:compile
[INFO] |  |  +- org.slf4j:jul-to-slf4j:jar:1.7.7:compile
[INFO] |  |  +- org.slf4j:log4j-over-slf4j:jar:1.7.7:compile
[INFO] |  |  \- ch.qos.logback:logback-classic:jar:1.1.2:compile
[INFO] |  |  \- ch.qos.logback:logback-core:jar:1.1.2:compile
[INFO] |  \- org.yaml:snakeyaml:jar:1.13:runtime
[INFO] +- org.springframework.boot:spring-boot-starter-tomcat:jar:1.1.10.RELEASE:compile
[INFO] |  +- org.apache.tomcat.embed:tomcat-embed-core:jar:7.0.57:compile
[INFO] |  +- org.apache.tomcat.embed:tomcat-embed-el:jar:7.0.57:compile
[INFO] |  +- org.apache.tomcat.embed:tomcat-embed-logging-juli:jar:7.0.57:compile
[INFO] |  \- org.apache.tomcat.embed:tomcat-embed-websocket:jar:7.0.57:compile
[INFO] +- com.fasterxml.jackson.core:jackson-databind:jar:2.3.4:compile
[INFO] |  +- com.fasterxml.jackson.core:jackson-annotations:jar:2.3.4:compile
[INFO] |  \- com.fasterxml.jackson.core:jackson-core:jar:2.3.4:compile
[INFO] +- org.hibernate:hibernate-validator:jar:5.0.3.Final:compile
[INFO] |  +- javax.validation:validation-api:jar:1.1.0.Final:compile
[INFO] |  +- org.jboss.logging:jboss-logging:jar:3.1.1.GA:compile
[INFO] |  \- com.fasterxml.classmate:jar:1.0.0:compile
[INFO] +- org.springframework:spring-core:jar:4.0.8.RELEASE:compile
[INFO] +- org.springframework:spring-web:jar:4.0.8.RELEASE:compile
[INFO] |  +- org.springframework:spring-aop:jar:4.0.8.RELEASE:compile
[INFO] |  |  \- aopalliance:aopalliance:jar:1.0:compile
[INFO] |  +- org.springframework:spring-beans:jar:4.0.8.RELEASE:compile
[INFO] |  \- org.springframework:spring-context:jar:4.0.8.RELEASE:compile
[INFO] \- org.springframework:spring-webmvc:jar:4.0.8.RELEASE:compile
[INFO]   \- org.springframework:spring-expression:jar:4.0.8.RELEASE:compile
[INFO] +- org.springframework.boot:spring-boot-starter-actuator:jar:1.1.10.RELEASE:compile
[INFO] |  \- org.springframework.boot:spring-boot-actuator:jar:1.1.10.RELEASE:compile
[INFO] \- org.springframework.boot:spring-boot-starter-test:jar:1.1.10.RELEASE:test
[INFO]   +- junit:junit:jar:4.11:test
[INFO]   +- org.mockito:mockito-core:jar:1.9.5:test
[INFO]   |  \- org.objenesis:objenesis:jar:1.0:test
[INFO]   +- org.hamcrest:hamcrest-core:jar:1.3:test
[INFO]   +- org.hamcrest:hamcrest-library:jar:1.3:test
[INFO]   \- org.springframework:spring-test:jar:4.0.8.RELEASE:test
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 1.988s
[INFO] Finished at: Thu Jan 29 11:16:10 EST 2015
cmd.exe[64]:6352 < 150128[64] 1/4 [+] CAPS NUM SCR L PRIT (1,8)-(158,56) 158x1000 (84,59) 25V 11136 100% //
```

Examples of Spring Boot Child Starters

- spring-boot-starter-actuator
- spring-boot-starter-amqp
- spring-boot-starter-aop
- spring-boot-starter-batch
- spring-boot-starter-cloud-connectors
- spring-boot-starter-data-elasticsearch
- spring-boot-starter-data-gemfire
- spring-boot-starter-data-jpa
- spring-boot-starter-data-mongodb
- spring-boot-starter-data-rest
- spring-boot-starter-data-solr
- spring-boot-starter-jdbc

Spring Boot Starters are a set of convenient dependency descriptors that you can include in your application

Building a Web App using Spring Boot

Steps for Creating Spring MVC App

- Step #1: Create a project with a proper starter
- Step #2: Write controllers, domains, services, etc
- Step #3: Write Application class
- Step #4: Build and run

Step #1: Create a project with a starter

- Maven or Gradle project

```
<dependency>
  <groupId>org.springframework.boot</groupId>
  <artifactId>spring-boot-starter-web</artifactId>
</dependency>
```



Maven starter for web app

Step #2: Write Code

- Write Controller, Domain, Service classes

```
com
+- jpassion
  +- myproject
    +- MainApplication.java
    +- AppConfiguration.java
    |
    +- domains
      +- Customer.java
    |
    +- repositories
      +- CustomerRepository.java
    |
    +- services
      +- CustomerService.java
    |
    +- controllers
      +- CustomerController.java
```

Step #3: Write Main Application Class

- The MainApplication.java file would declare the main method, along with the @SpringBootApplication

```
package com.example.myproject;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.EnableAutoConfiguration;
import org.springframework.boot.autoconfigure.SpringBootApplication;
import org.springframework.context.annotation.ComponentScan;

@SpringBootApplication
@EnableAutoConfiguration
@ComponentScan
public class MainApplication {

    public static void main(String[] args) {
        SpringApplication.run(MainApplication.class, args);
    }
}
```



Same as
@SpringBootApplication

Step #4: Build and run

- If “war” file has been built, you can run the “war” file using “java” command - this war file can be deployed over any Servlet container
 - > mvn package
 - > java -jar target/mywebapp.war
- If “jar” file
 - > java -jar target/mywebapp.jar
- As a maven project
 - > mvn spring-boot:run

Getting Started with Spring Boot

Add Code

- Write a simplest REST controller


```
package com.example;
```

```
import org.springframework.stereotype.Controller;
import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.ResponseBody;
```

```
@Controller
public class MyController {
```

```
    @RequestMapping("helloworld")
    @ResponseBody
    public String getMessage(){
        return "Hello, World!";
    }
}
```

Run the application

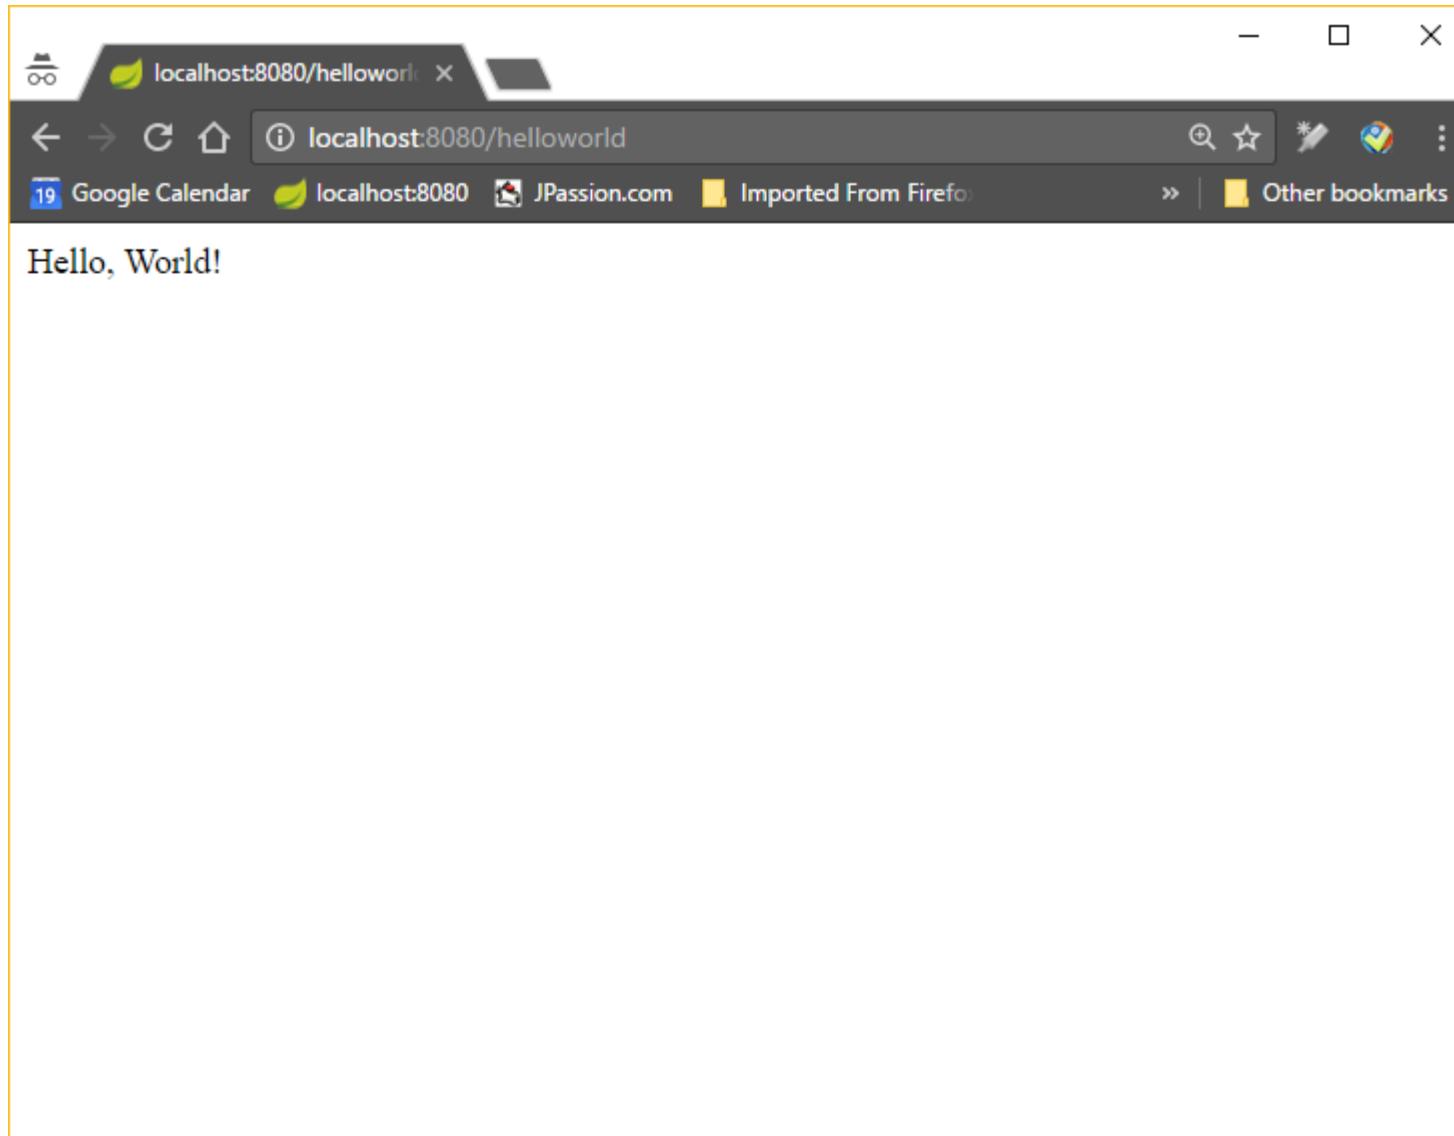

Lab:

Exercise 1: Build a Spring Boot Application using STS

4979_spring_boot.zip



Auto-configuration

How does Auto-configuration work?

- Spring Boot auto-configuration attempts to automatically configure your Spring application based on the jar dependencies that you have added
 - > If HSQLDB is on your classpath, and you have not manually configured any database connection beans, then HSQLDB in-memory database gets automatically configured
 - > If *tomcat-embedded.jar* is on your classpath, then a *TomcatEmbeddedServletContainerFactory* gets automatically configured (unless you have defined your own *EmbeddedServletContainerFactory* bean)
- You need to enable auto-configuration
 - > By adding the *@EnableAutoConfiguration* or *@SpringBootApplication* annotation to one of the *@Configuration* classes

Tuning Auto-configuration

- Auto-configuration tries to be as intelligent as possible and noninvasive
 - > It will back-away as you define more of your own configuration - for example, if you add your own *DataSource* bean, the default embedded database support will back away
 - > You can always manually exclude any configuration that you never want to apply
 - > Auto-configuration is always applied after user-defined beans have been registered
- If you need to find out what auto-configuration is currently being applied, and why, starting your application with the `--debug` switch
 - > This will log an auto-configuration report to the console.

@EnableAutoConfiguration

- Built-in Auto-configuration classes
 - > @DataSourceAutoConfiguration
 - > @JdbcTemplateAutoConfiguration
 - > @HibernateJpaAutoConfiguration
 - > @JpaRepositoriesAutoConfiguration
 - > @WebMvcAutoConfiguration
 - > ...
- You can manually exclude configuration

```
@Configuration  
@EnableAutoConfiguration(exclude={DataSourceAutoConfiguration.class})  
public class MyConfiguration {  
}
```

Application Properties File (application.properties)

Application Property Files

- `SpringApplication` will load properties from *application.properties* files in the following locations and add them to the Spring Environment
 - > A /config subdirectory of the current directory
 - > The current directory
 - > A classpath /config package
 - > The classpath root

```
# application.properties
app.name=MyApp
app.description=${app.name} is a Spring Boot application
```

External Configuration

External Configuration

- Spring Boot allows you to externalize your configuration so you can work with the same application code in different environments
- You can use properties files, YAML files, environment variables and command-line arguments to externalize configuration
- Property values can be injected directly into your beans using the `@Value` annotation, accessed via Spring's Environment abstraction or bound to structured objects

application.yaml

```
contact:  
    tel: 555-111-2222  
    email: contact@jpassion.com  
    web: http://jpassion.com  
  
server:  
    address: 127.0.0.1  
    port: 8000  
---  
spring:  
    profiles: development  
server:  
    address: 127.0.0.1  
    port: 8080  
---  
spring:  
    profiles: production  
server:  
    address: 127.0.0.1  
    port: 8888
```

```
@Value("${contact.tel}")  
private String tel;  
  
@Value("${contact.email}")  
private String email;  
  
@Value("${contact.web}")  
private String web;
```

Property Order

1. Command line arguments.
2. JNDI attributes from java:comp/env.
3. Java System properties (System.getProperties()).
4. OS environment variables.
5. A RandomValuePropertySource that only has properties in random.*.
6. Profile-specific application properties outside of your packaged jar (application-{profile}.properties and YAML variants)
7. Profile-specific application properties packaged inside your jar (application-{profile}.properties and YAML variants)
8. Application properties outside of your packaged jar (application.properties and YAML variants).
9. Application properties packaged inside your jar (application.properties and YAML variants).
10. @PropertySource annotations on your @Configuration classes.
11. Default properties (specified using SpringApplication.setDefaultProperties).

Lab:

**Exercise 2: Application Properties File
& External Configuration Files**

4979_spring_boot.zip



SpringApplication Class

What does *SpringApplication* class do?

- When *SpringApplication.run(MyConfiguration.class, args)* is called, it bootstraps and launches a Spring application from a Java main method by performing the following steps
 - > Create an appropriate ApplicationContext instance (depending on your classpath) - By default, an *AnnotationConfigApplicationContext* (for Java application) or *AnnotationConfigEmbeddedWebApplicationContext* (for Web application) will be used
 - > Register a *CommandLinePropertySource* to expose command line arguments as Spring properties
 - > Refresh the application context, loading all singleton beans
 - > Trigger any *CommandLineRunner* beans

How do you run the application?

- In most circumstances, the static `run(Object, String[])` method can be called directly from your main method to bootstrap your application
- Provides a convenient way to bootstrap a Spring application that will be started from a `main()` method

```
// Example #1
public static void main(String[] args) {
    SpringApplication.run(MySpringConfiguration.class, args);
}
```

```
// Example #2
public static void main(String[] args) {
    SpringApplication app = new SpringApplication(MySpringConfiguration.class);
    app.setBanner(new MyBanner());
    app.run(args);
}
```

Lab:

Exercise 3: Spring Application Class
4979_spring_boot.zip



Actuator

Monitoring and Managing Application

- Spring Boot includes a number of additional features to help you monitor and manage your application when it's pushed to production
- You can choose to manage and monitor your application using
 - > HTTP endpoints, with JMX or even by remote shell (SSH or Telnet)
- Auditing, health and metrics gathering can be automatically applied to your application.
- Actuator HTTP endpoints are only available with a Spring MVC-based application

Adding Actuator to Maven App

- Add the following ‘starter’ dependency

```
<dependency>
    <groupId>org.springframework.boot</groupId>
    <artifactId>spring-boot-starter-actuator</artifactId>
</dependency>
```

Endpoints


- Actuator endpoints allow you to monitor and interact with your application
- Spring Boot includes a number of built-in endpoints and you can also add your own
 - > autoconfig - displays an auto-configuration report
 - > beans - displays a complete list of all Spring beans in the app
 - > configprops - displays a collated list of all @ConfigurationProperties
 - > dump - performs a thread dump
 - > env - exposes properties from Spring's ConfigurableEnvironment
 - > health - shows application health information
 - > info - displays arbitrary application info
 - > mappings – displays endpoints

Endpoints

- Built-in endpoints (continued from previous slide)
 - > metrics - shows 'metrics' information for the current application
 - > shutdown - allows the application to be gracefully shutdown (not enabled by default)
 - > trace - displays trace information (by default the last few HTTP requests)
- Note: for pretty JSON print, add the following to *application.properties* file

```
spring.jackson.serialization.INDENT_OUTPUT=true
```


autoconfig

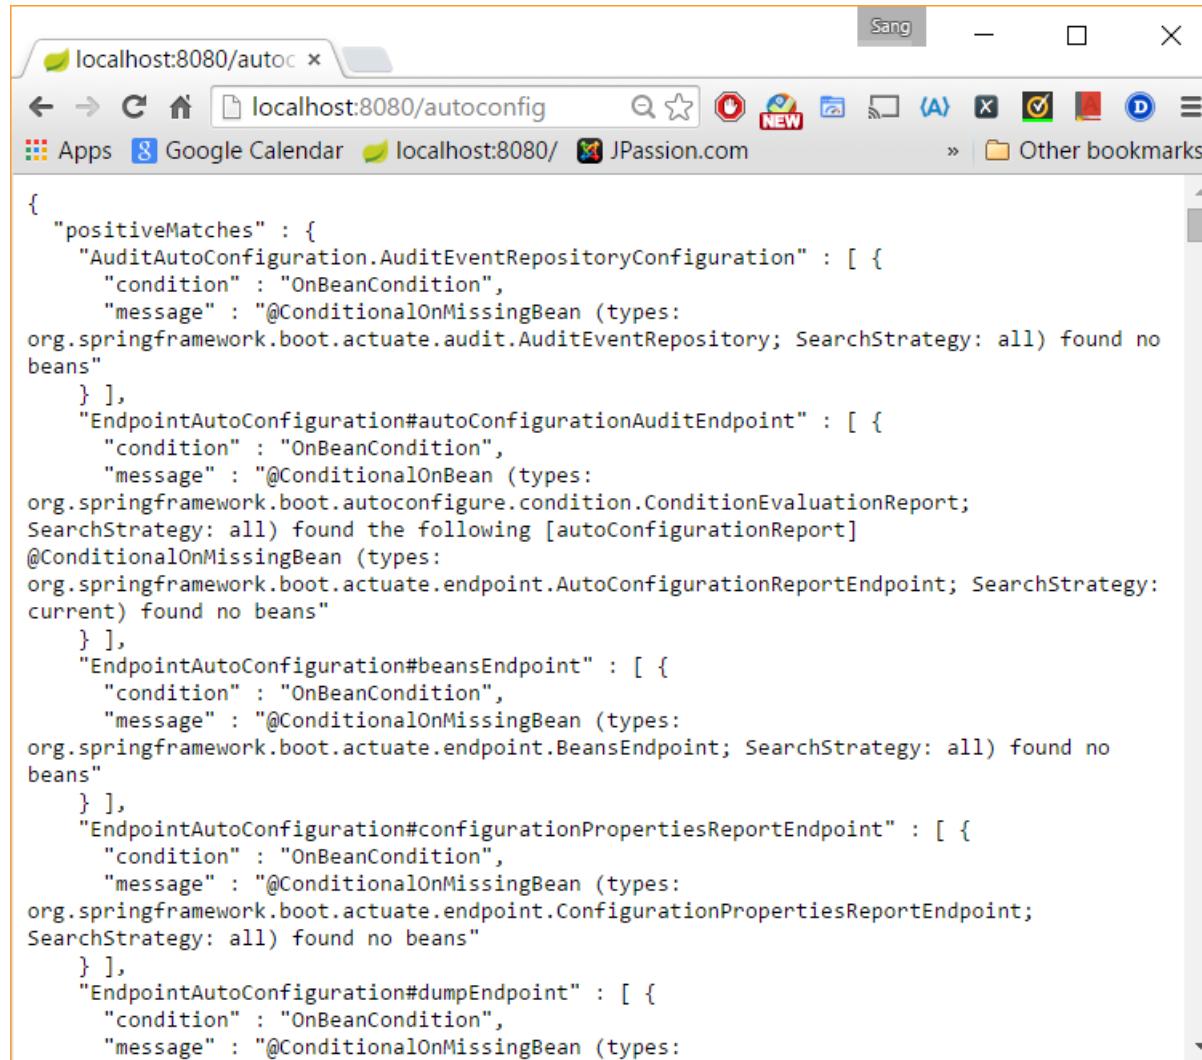


The screenshot shows a browser window with the URL `localhost:8080/autoc`. The page content is a JSON object representing the autoconfiguration report. The report includes sections for various endpoints and their configuration details, such as AuditEventRepositoryConfiguration, autoConfigurationAuditEndpoint, beansEndpoint, configurationPropertiesReportEndpoint, and dumpEndpoint. Each section contains a list of conditions (OnBeanCondition) and messages indicating whether beans were found or not.

```
{
  "positiveMatches": {
    "AuditAutoConfiguration.AuditEventRepositoryConfiguration": [
      {
        "condition": "OnBeanCondition",
        "message": "@ConditionalOnMissingBean (types: org.springframework.boot.actuate.audit.AuditEventRepository; SearchStrategy: all) found no beans"
      }
    ],
    "EndpointAutoConfiguration#autoConfigurationAuditEndpoint": [
      {
        "condition": "OnBeanCondition",
        "message": "@ConditionalOnBean (types: org.springframework.boot.autoconfigure.condition.ConditionEvaluationReport; SearchStrategy: all) found the following [autoConfigurationReport] @ConditionalOnMissingBean (types: org.springframework.boot.actuate.endpoint.AutoConfigurationReportEndpoint; SearchStrategy: current) found no beans"
      }
    ],
    "EndpointAutoConfiguration#beansEndpoint": [
      {
        "condition": "OnBeanCondition",
        "message": "@ConditionalOnMissingBean (types: org.springframework.boot.actuate.endpoint.BeansEndpoint; SearchStrategy: all) found no beans"
      }
    ],
    "EndpointAutoConfiguration#configurationPropertiesReportEndpoint": [
      {
        "condition": "OnBeanCondition",
        "message": "@ConditionalOnMissingBean (types: org.springframework.boot.actuate.endpoint.ConfigurationPropertiesReportEndpoint; SearchStrategy: all) found no beans"
      }
    ],
    "EndpointAutoConfiguration#dumpEndpoint": [
      {
        "condition": "OnBeanCondition",
        "message": "@ConditionalOnMissingBean (types: "
    ]
  }
}
```

health

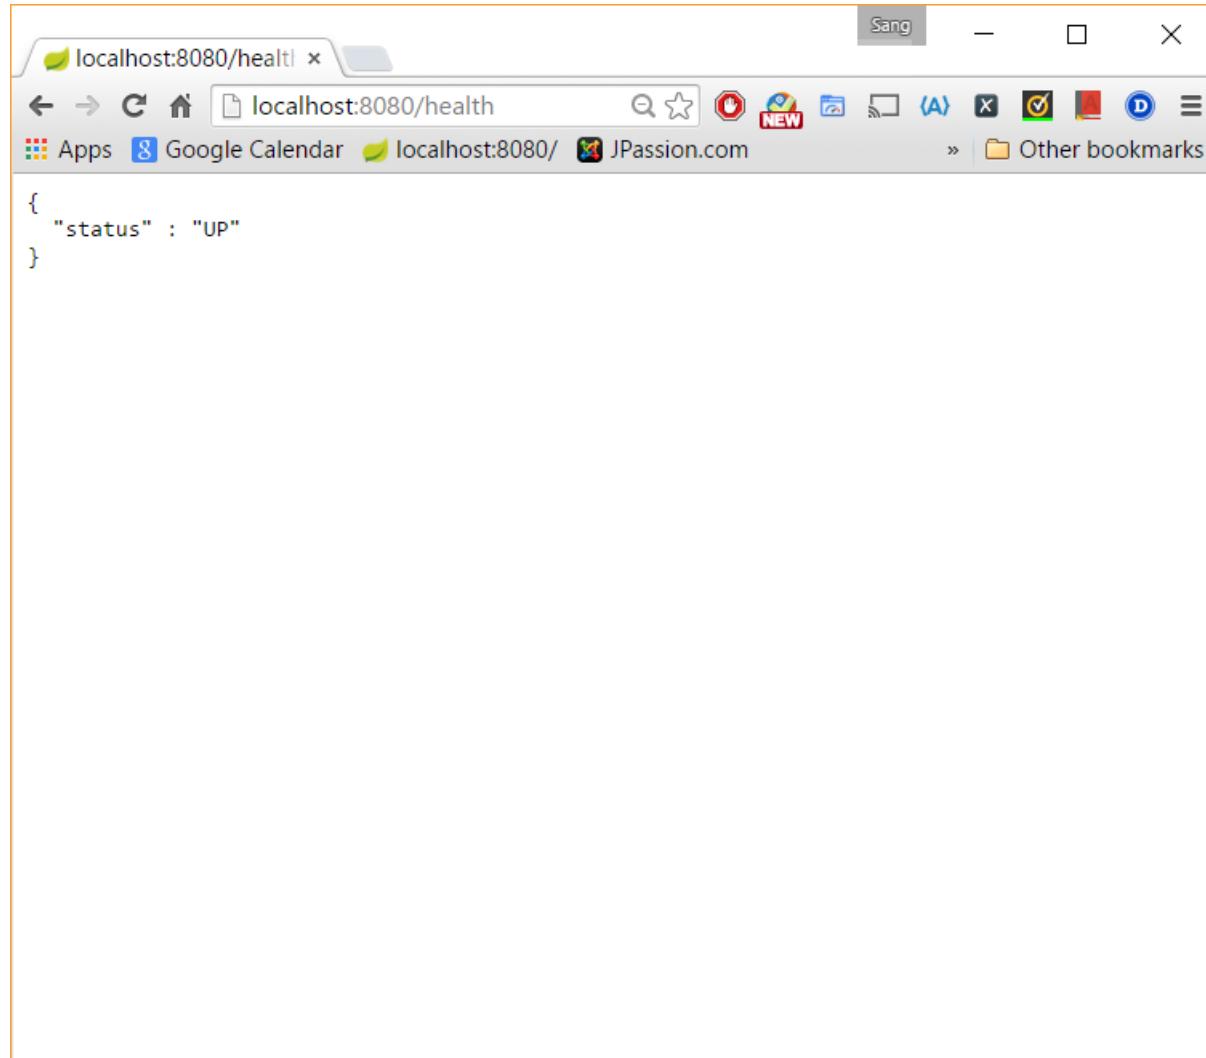


Metrics

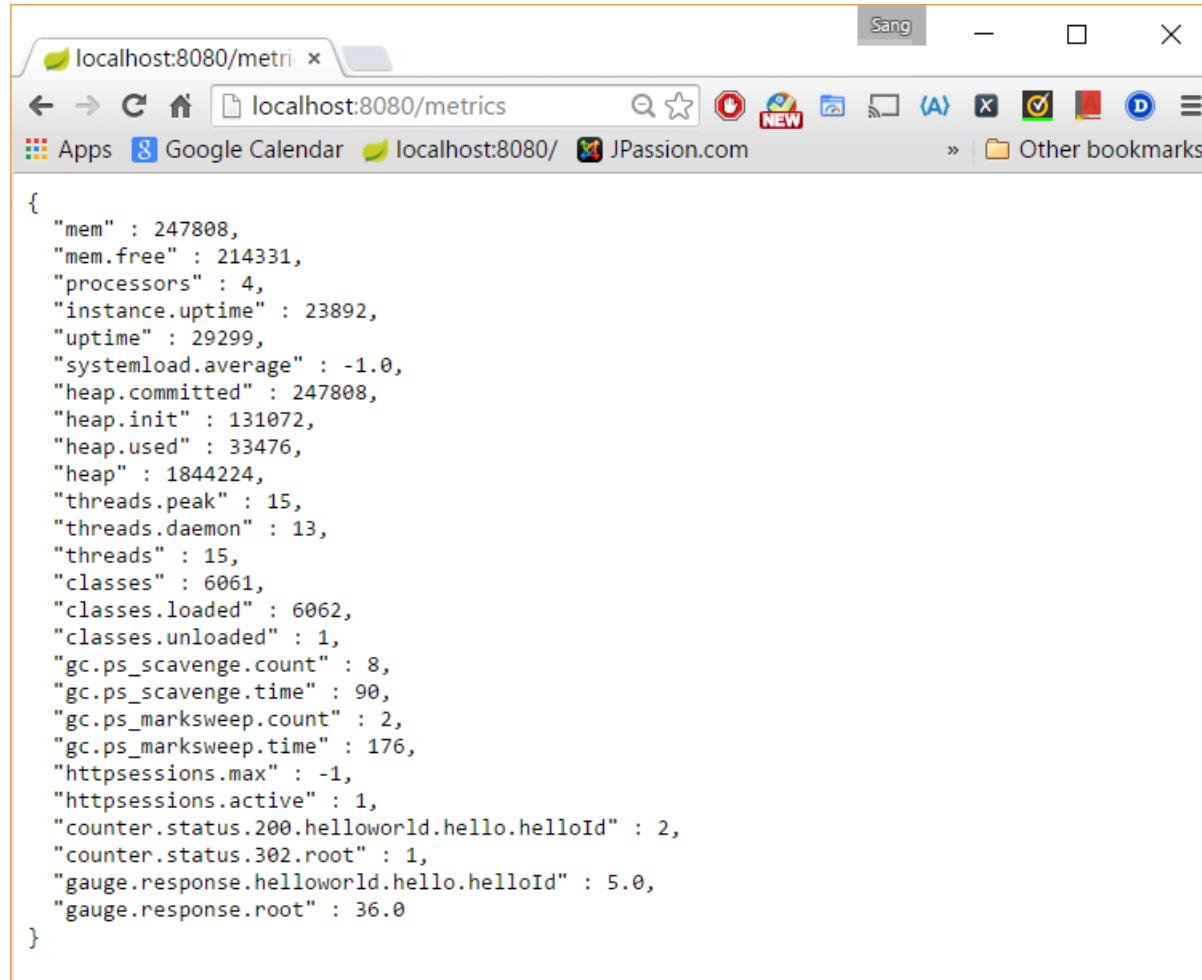

A screenshot of a web browser window titled "localhost:8080/metrics". The browser interface includes a toolbar with icons for back, forward, search, and refresh, and a menu bar with "Sang" selected. The address bar shows the URL. Below the address bar is a bookmarks bar with links to "Apps", "Google Calendar", "localhost:8080", and "JPassion.com". The main content area of the browser displays a JSON object representing system metrics:

```
{  
    "mem" : 247808,  
    "mem.free" : 214331,  
    "processors" : 4,  
    "instance.uptime" : 23892,  
    "uptime" : 29299,  
    "systemload.average" : -1.0,  
    "heap.committed" : 247808,  
    "heap.init" : 131072,  
    "heap.used" : 33476,  
    "heap" : 1844224,  
    "threads.peak" : 15,  
    "threads.daemon" : 13,  
    "threads" : 15,  
    "classes" : 6061,  
    "classes.loaded" : 6062,  
    "classes.unloaded" : 1,  
    "gc.ps_scavenge.count" : 8,  
    "gc.ps_scavenge.time" : 90,  
    "gc.ps_marksweep.count" : 2,  
    "gc.ps_marksweep.time" : 176,  
    "httpsessions.max" : -1,  
    "httpsessions.active" : 1,  
    "counter.status.200.helloworld.hello.helloId" : 2,  
    "counter.status.302.root" : 1,  
    "gauge.response.helloworld.hello.helloId" : 5.0,  
    "gauge.response.root" : 36.0  
}
```


Trace

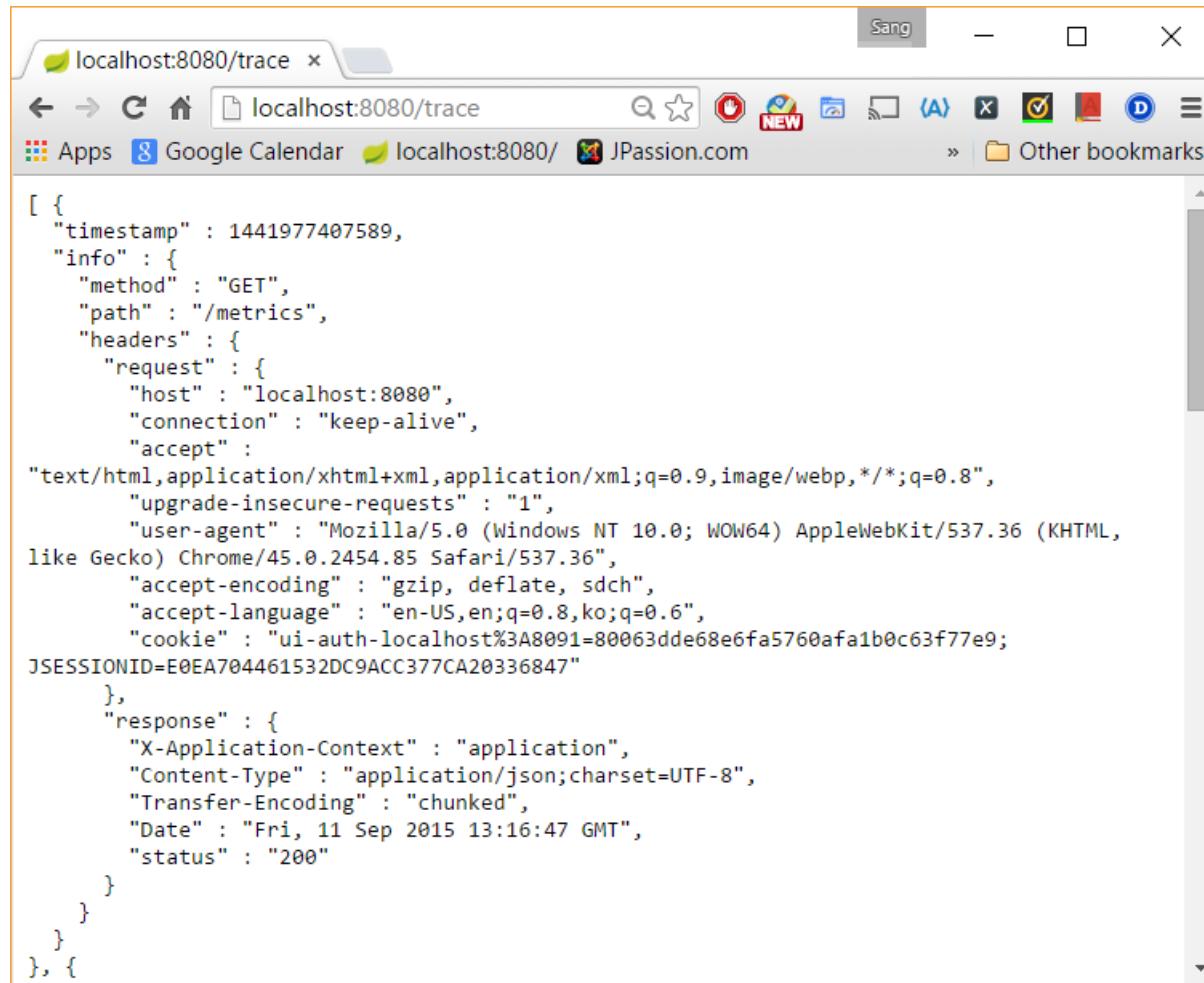

A screenshot of a web browser window titled "localhost:8080/trace". The address bar shows the same URL. The browser interface includes standard buttons for back, forward, search, and refresh, along with a tab bar containing "localhost:8080/trace", "Google Calendar", "localhost:8080/", and "JPassion.com". Below the toolbar, there are links for "Apps" and "Other bookmarks". The main content area displays a JSON-like trace log:

```
[ { "timestamp" : 1441977407589, "info" : { "method" : "GET", "path" : "/metrics", "headers" : { "request" : { "host" : "localhost:8080", "connection" : "keep-alive", "accept" : "text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,*/*;q=0.8", "upgrade-insecure-requests" : "1", "user-agent" : "Mozilla/5.0 (Windows NT 10.0; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/45.0.2454.85 Safari/537.36", "accept-encoding" : "gzip, deflate, sdch", "accept-language" : "en-US,en;q=0.8,ko;q=0.6", "cookie" : "ui-auth-localhost%3A8091=80063dde68e6fa5760afa1b0c63f77e9; JSESSIONID=E0EA704461532DC9ACC377CA20336847" }, "response" : { "X-Application-Context" : "application", "Content-Type" : "application/json;charset=UTF-8", "Transfer-Encoding" : "chunked", "Date" : "Fri, 11 Sep 2015 13:16:47 GMT", "status" : "200" } } }
```

Mappings

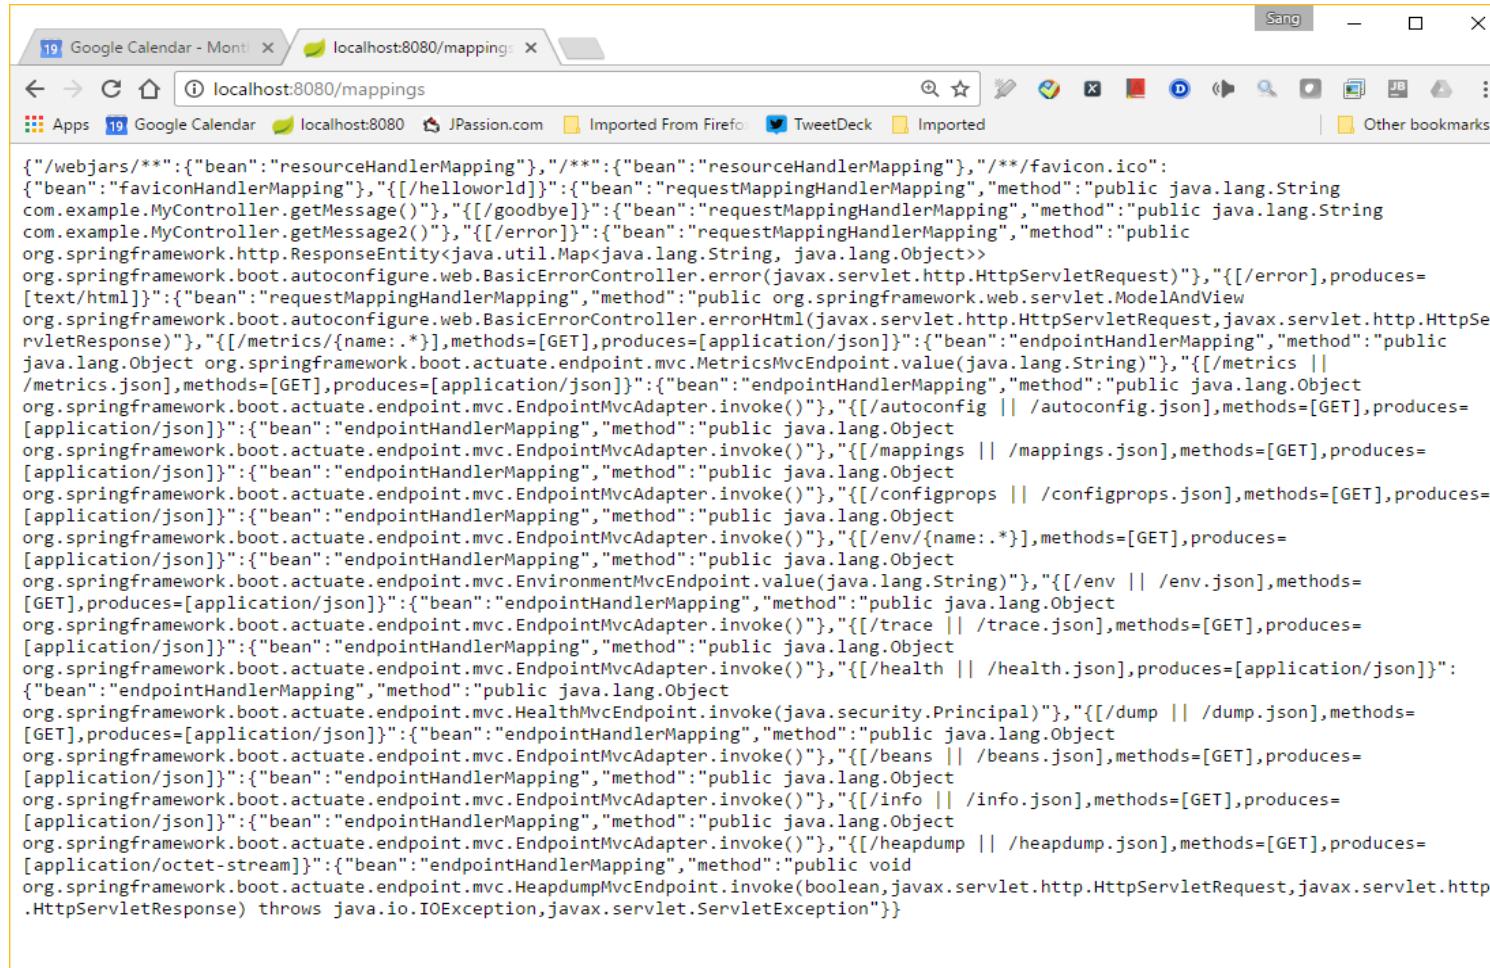

The screenshot shows a web browser window with the URL `localhost:8080/mappings`. The page content is a large block of JSON configuration code, likely generated by a tool like `curl -sSf http://localhost:8080/mappings | jq .`. The code describes various beans and their mappings, including methods like `getMessage()`, `getGoodbye()`, and `getMetrics()`, along with their corresponding HTTP methods and response types.

```
{"webjars/**":{"bean":"resourceHandlerMapping"},"/**":{"bean":"resourceHandlerMapping"},"**/favicon.ico":{"bean":"faviconHandlerMapping"},"/{helloworld}":{"bean":"requestMappingHandlerMapping","method":"public java.lang.String com.example.MyController.getMessage()"},"/{goodbye}":{"bean":"requestMappingHandlerMapping","method":"public java.lang.String com.example.MyController.getMessage2()"},"/{error}":{"bean":"requestMappingHandlerMapping","method":"public org.springframework.http.ResponseEntity<java.util.Map<java.lang.String, java.lang.Object>> org.springframework.boot.autoconfigure.web.BasicErrorController.error(javax.servlet.http.HttpServletRequest)"},"/{error},produces=[text/html]":{"bean":"requestMappingHandlerMapping","method":"public org.springframework.web.servlet.ModelAndView org.springframework.boot.autoconfigure.web.BasicErrorController.errorHtml(javax.servlet.http.HttpServletRequest,javax.servlet.http.HttpServletResponse)"},"/{metrics/{name:.}}",methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.MetricsMvcEndpoint.value(java.lang.String)"},"/{metrics || metrics.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{autoconfig || /autoconfig.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{mappings || /mappings.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{configprops || /configprops.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{env/{name:.}}",methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EnvironmentMvcEndpoint.value(java.lang.String)"},"/{env || /env.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{trace || /trace.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{health || /health.json},produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.HealthMvcEndpoint.invoke(javax.security.Principal)"},"/{dump || /dump.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{beans || /beans.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{info || /info.json},methods=[GET],produces=[application/json]":{"bean":"endpointHandlerMapping","method":"public java.lang.Object org.springframework.boot.actuate.endpoint.mvc.EndpointMvcAdapter.invoke()"},"/{heapdump || /heapdump.json},methods=[GET],produces=[application/octet-stream]":{"bean":"endpointHandlerMapping","method":"public void org.springframework.boot.actuate.endpoint.mvc.HeapdumpMvcEndpoint.invoke(boolean,javax.servlet.http.HttpServletRequest,javax.servlet.http.HttpServletResponse) throws java.io.IOException,javax.servlet.ServletException"}}
```

Lab:

Exercise 4: Actuator
4979_spring_boot.zip



Code with Passion!