

DAY 2 SALES FORCE TRAINING


Block -1

Task 1 :-

1-List of 5 city names, loop through, print each in uppercase

Code:

```
List<String> cities = new List<String>();  
cities.add('Hyderabad');  
cities.add('Chennai');  
for(String city : cities)  
{  
    System.debug(city.toUpperCase());  
}
```

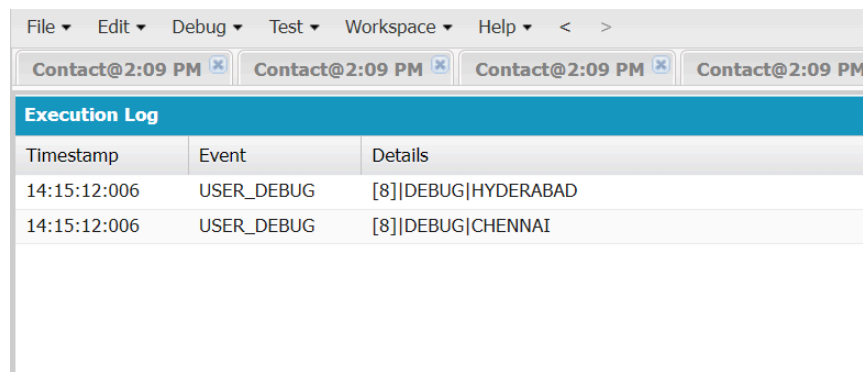


Execution Log		
Timestamp	Event	Details
14:15:12:006	USER_DEBUG	[8] DEBUG HYDERABAD
14:15:12:006	USER_DEBUG	[8] DEBUG CHENNAI

2- Set from a SOQL query of your custom object (no duplicates), print the size

Code:

```
Set<Id> cityIds = new Set<Id>();  
  
for (City__c city : [SELECT Id FROM City__c]) {  
    cityIds.add(city.Id);  
}  
  
System.debug('Total Cities: ' + cityIds.size());
```

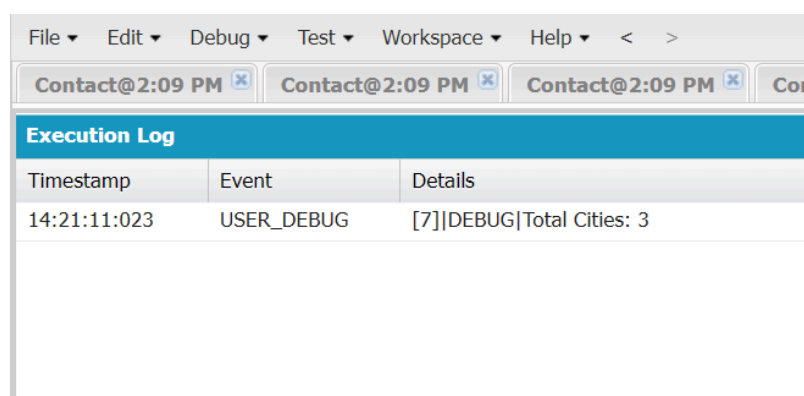

Execution Log		
Timestamp	Event	Details
14:21:11:023	USER_DEBUG	[7] DEBUG Total Cities: 3

3. Map from a SOQL query, look up one record by Id, print a field value

Code:

```
Map<Id, City__c> cityMap = new Map<Id, City__c>(
    [SELECT Id, Name, State__c, Population__c FROM City__c]
);
```


```
Id firstCityId = cityMap.keySet().iterator().next();
```

```
City__c city = cityMap.get(firstCityId);
```

```
System.debug('City Name: ' + city.Name);
```

```
System.debug('State: ' + city.State__c);
```

```
System.debug('Population: ' + city.Population__c);
```

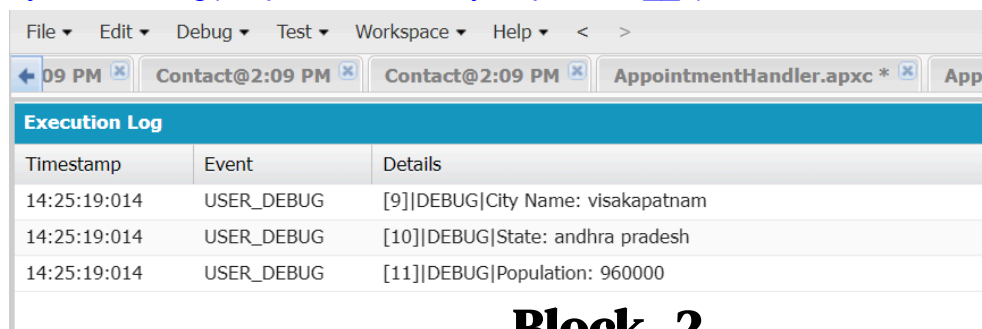

Execution Log		
Timestamp	Event	Details
14:25:19:014	USER_DEBUG	[9] DEBUG City Name: visakapatnam
14:25:19:014	USER_DEBUG	[10] DEBUG State: andhra pradesh
14:25:19:014	USER_DEBUG	[11] DEBUG Population: 960000

Block -2

Task 2 :-

4. Map from a SOQL query, look up one record by Id, print a field value

Code:

```
trigger CityTrigger on city__c (after insert) {
```

```
    for(city__c city : Trigger.new){
```

```
        List<city__c> cities = [
            SELECT Id, Name,state__c
            FROM city__c
            WHERE Id = :city.Id
        ];
```

```
        System.debug(cities);
```

```
    }
}
```

5. Insert 200 records at once (Data Import) and watch it hit a governor limit.

Code:


```
List<city__c> cityList = new List<city__c>();
```

```
for(Integer i = 1; i <= 200; i++) {
```

```
    cityList.add(new city__c(
        Name = 'City ' + i,
        City_code__c = 'C' + i,
        population__c = 100000 + i,
        state__c = 'Andhra Pradesh'
    ));
```

```
}
```

```
insert cityList;
```

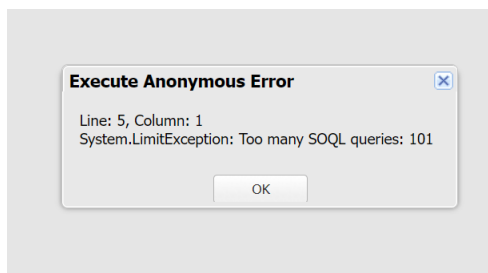

6. Fix it: move SOQL/DML outside the loop using a List or Map. Re-run with 200+ records

Code:

```
trigger CityTrigger on city__c (after insert) {
```

```
    Set<Id> cityIds = new Set<Id>();
```

```
    for(city__c city : Trigger.new){
```

```
        cityIds.add(city.Id);
```

```
    }
```

```
    List<city__c> cities = [
```

```
        SELECT Id, Name, City_code__c, population__c, state__c
```

```
        FROM city__c
```

```
        WHERE Id IN :cityIds
```

```
    ];
```

```
    for(city__c c : cities){
```

```
        System.debug(c.Name);
```

```
    }
```

```
}
```

The screenshot shows the SAP IDE debugger interface. The top pane displays the 'Execution Log' with a table of events. The bottom pane shows the 'Overall Code Coverage' for the 'CityTrigger.apxt' project.

Timestamp	Event	Details
15:18:31:429	USER_DEBUG	[15] DEBUG City 1
15:18:31:429	USER_DEBUG	[15] DEBUG City 2
15:18:31:429	USER_DEBUG	[15] DEBUG City 3
15:18:31:429	USER_DEBUG	[15] DEBUG City 4
15:18:31:429	USER_DEBUG	[15] DEBUG City 5
15:18:31:429	USER_DEBUG	[15] DEBUG City 6
15:18:31:429	USER_DEBUG	[15] DEBUG City 7
15:18:31:429	USER_DEBUG	[15] DEBUG City 8
15:18:31:429	USER_DEBUG	[15] DEBUG City 9
15:18:31:429	USER_DEBUG	[15] DEBUG City 10
15:18:31:429	USER_DEBUG	[15] DEBUG City 11
15:18:31:429	USER_DEBUG	[15] DEBUG City 12
15:18:31:429	USER_DEBUG	[15] DEBUG City 13
15:18:31:429	USER_DEBUG	[15] DEBUG City 14
15:18:31:429	USER_DEBUG	[15] DEBUG City 15
15:18:31:429	USER_DEBUG	[15] DEBUG City 16
15:18:31:429	USER_DEBUG	[15] DEBUG City 17
15:18:31:429	USER_DEBUG	[15] DEBUG City 18
15:18:31:429	USER_DEBUG	[15] DEBUG City 19
15:18:31:429	USER_DEBUG	[15] DEBUG City 20
15:18:31:429	USER_DEBUG	[15] DEBUG City 21
15:18:31:429	USER_DEBUG	[15] DEBUG City 22

Class	Percent	Lines
Overall	0%	
AppointmentHandler	0%	0/6
AppointmentTrigger	0%	0/1
CityTrigger	0%	0/6
StringListTest	0%	0/2

Block -3

Task 3:-

Write a simple @future method that takes a record Id, queries it, and updates one field. Call it from Execute Anonymous.

Code:

```
public class CityFutureHandler {

    @future
    public static void updateCity(Id cityId){

        City__c city = [
            SELECT Id, Name, state__c
            FROM City__c
            WHERE Id = :cityId
            LIMIT 1
        ];
        city.state__c = 'Updated'; // 7 characters

        update city;
    }
}
```

Calling it from execute anonymous window:

```
City__c city = [  
    SELECT Id  
    FROM City__c  
    LIMIT 1  
];
```

```
CityFutureHandler.updateCity(city.Id);
```

```
System.debug('Future Method Called');
```

 **Apex Jobs**

[Click here to go to the new batch jobs page](#)

Apex Jobs

[Help for this Page](#)

Monitor the status of all Apex jobs, and optionally, abort jobs that are in progress.

 **Percent of Asynchronous Apex Used: 0%**
You have currently used 1 asynchronous Apex operations out of an allowed 24-hour organization limit of 250,000. To learn about how this limit is calculated and what contributes to it, see the [Lightning Platform Apex Limits](#) topic.

View: All [Create New View](#)

Action	Submitted Date	Job Type	Status	Status Detail	Total Batches	Batches Processed	Failures	Submitted By	Completion Date	Apex Class	Apex Method	Apex Job ID
	29/07/2026, 3:33 pm	Future	Completed		0	0	0	Sasikiran_Mamchim	29/07/2026, 3:33 pm	CityFutureHandler	updateCity	707dL00001GXGol

Difference between a Future method and Queueable Apex?

Future Method: Used for simple asynchronous operations. It accepts only primitive parameters and cannot chain other jobs.

Queueable Apex: More flexible and powerful. It supports complex data types, job chaining, and better monitoring through Apex Jobs. It is the preferred choice for most new asynchronous Apex implementations.

Why would you need Batch Apex instead of a normal trigger?

Batch Apex is used to process large volumes of records that would exceed the governor limits of a normal trigger. It processes records in smaller batches, making it efficient and reliable for large data operations.

Block -4

Task 4:-


Build two small LWCs on your custom object

7. Parent → Child: Parent passes a record Id to a child via a public @api property. The child displays a field from that record.

8. Child → Parent: Button in the child fires a custom event. The parent listens and updates something on screen when it fires.

Zip file :

https://drive.google.com/file/d/1xVWwOPbqgC1-GIMI5_Og9tykEWrnTegL/view?usp=sharing

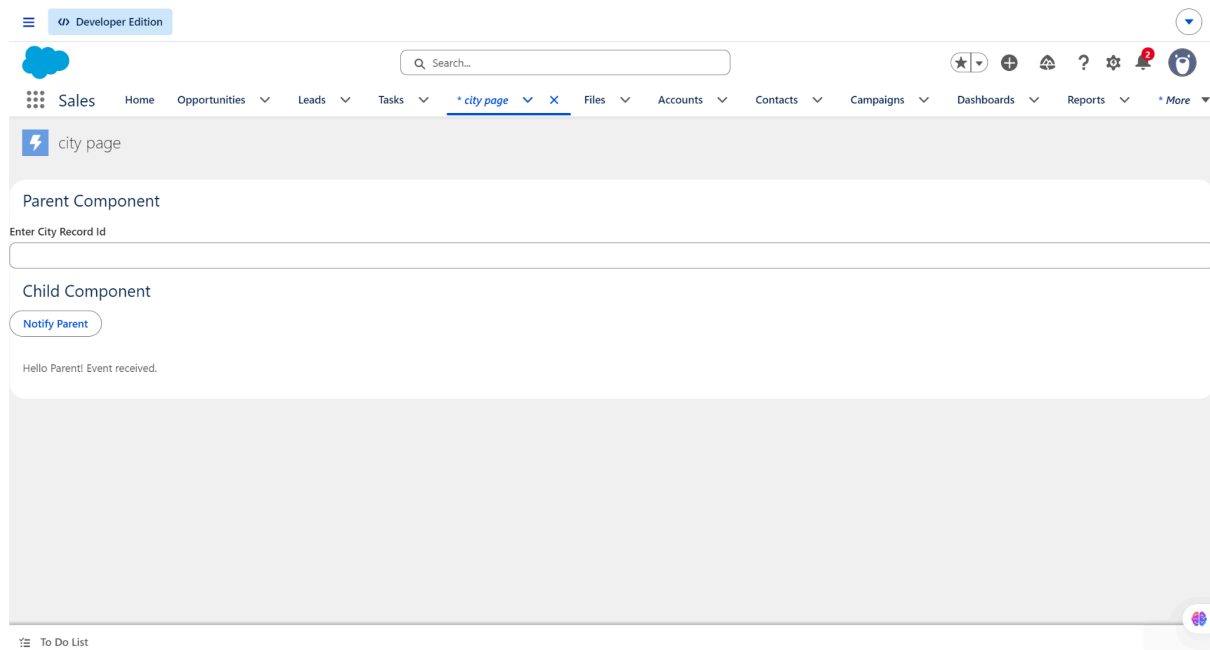

Team mates:

R.Yamineeswar(23pa1a5749):<https://drive.google.com/file/d/1tsvHPsl1Lm1C01Hib8uEXVrn8AwdXLNi/view?usp=drivesdk>

P.Lahari(24pa5a5708):<https://drive.google.com/file/d/1BoZLAAiHUzRBp6QsYkcS7cW0HyKUV-K/view?usp=sharing>

G.Pravallika(23pa1a5715):<https://drive.google.com/file/d/1CCuSPDQSR1cSVSvdup0eW-iUMwXNB-YB/view?usp=drivesdk>

G.Geetha(24pa5a5705):<https://drive.google.com/file/d/17JgMTvoXtDVk19mQfxdq4VokKfGZAD0/view?usp=drivesdk>

K.Rajasri(24pa5a5706):https://drive.google.com/file/d/1mcGe_3lbQy4XrM6uk8Owzu5dVcFVtTtE/view?usp=sharing

