NPCI
भारतीय राष्ट्रीय भुगतान निगम
NATIONAL PAYMENTS CORPORATION OF INDIA

EMBEDDED AND IOT BASED PAYMENTS TSD

V1.8

UPI
UNIFIED PAYMENTS INTERFACE

Copyright © 2008-2020 NPCI ® All Rights Reserved

National Payments Corporation of India (NPCI), Mumbai, Maharashtra, India

The Programs, which include both the software and documentation, contain information that is proprietary to National Payments Corporation of India and its licensors; they are provided under a license agreement containing restrictions on use and disclosure and are also protected by copyright and other intellectual and industrial property laws. Except as may be expressly permitted in such license agreement, no part of the Programs may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose.

The information contained in this document is subject to change without notice. If you find any problems in the documentation, please report them to us in writing. This document is not warranted to be error-free.

NPCI product names are trademarks of National Payments Corporation of India. Other names may be trademarks of their respective owners.

Contents

Preface **3**

Document History **3**

1 Introduction **5**

2 Design Flow (Device with interface and with internet) **5**

2.1 (a) Device Binding *5*

2.1 (b) CL Registration Secondary App *6*

2.2 Registration *7*

2.3 Payment Flow *7*

2.4 To limit setup, modification, and cancellation for dependent device *8*

2.5 Limit query of dependent device through primary device *9*

2.6 (a) Deregistration (Primary App initiated) *9*

2.7 (b) Deregistration (Secondary App initiated) *10*

3 API Specifications **11**

3.1 Register Embedded Device API *11*

3.1.1 ReqRegED API From PSPo to UPI to PSPe: SETDEVICE 12

3.1.2 RespRegED API From PSPe to UPI to PSPo: SETDEVICE 13

3.1.3 ReqRegED API From PSPe to UPI to PSPo: SETUPIID 13

3.1.4 RespRegED API From PSPo to UPI to PSPe: SETUPIID 14

3.2 Limit Management API *15*

3.2.1 ReqLimitMgt API From PSPo to UPI to PSPe: SETLIMIT 15

3.2.2 RespLimitMgt API From PSPe to UPI to PSPo: SETLIMIT 16

3.2.3 ReqLimitMgt API From PSPo to UPI to PSPe: DISPLAYLIMIT 17

3.2.4 RespLimitMgt API From PSPe to UPI to PSP0: DISPLAYLIMIT 18

3.3 Disable Embedded Device *18*

3.3.1 ReqRegED API From PSPo to UPI to PSPe : DISABLE Initiated By Primary Device 18

3.3.2 RespRegED API From PSPe to UPI to PSPo: DISABLE 20

3.3.3 ReqRegED API From PSPe to UPI to PSPo: DISABLE Initiated By Embedded Device 20

3.3.4 RespRegED API From PSPo to UPI to PSPe: DISABLE 21

3.4 List Account API *22*

3.4.1 ReqListAccount From PSPe to UPI to PSPo. 22

3.4.2 RespListAccount From PSPo to UPI to PSPe. 23

3.5 Payment using Embedded Payments *23*

3.5.1 ReqPay (From Payer PSPe to UPI) 23

3.5.2 ReqAuthDetails from UPI to Payee PSP 28

3.5.3 RespAuthDetails from Payee PSP 28

3.5.4 Internal call by UPI to Auth Engine 30

3.5.5 ReqPay UPI to Remitter bank (DEBIT) 30

3.5.6 RespPay from Remitter bank to UPI (DEBIT) 31

3.5.7 ReqPay to Beneficiary bank (CREDIT) 32

3.5.8 RespPay from beneficiary bank to UPI (CREDIT) 33
3.5.9 Final RespPay from UPI to Payer PSPe 34

3.6 Transaction Confirmation 36
3.6.1 ReqTxnConfirmation 36
3.6.2 RespTxnConfirmation 36

3.7 Transaction Confirmation For PSPo 36
3.7.1 ReqSync API From PSPe to UPI to PSPo: TXNCONF 36
3.7.2 RespSync API From PSPo to UPI to PSPe: TXNCONF 37

4 Tag Specifications for RegED API 38

4.1 ReqRegED 38

4.2 RespRegED 40

4.3 ReqLimitMgt 42

4.4 RespLimitMgt 44

Preface

This document enlists the specifications for Embedded and IOT based Payments implementation.

Document History

Version Number	Description	Created by	Reviewed By	Remarks
1.0	Embedded and IoT based payments	Reemi Suryawanshi	Zeeshan Khan	API flows and Tag specifications
1.1	Embedded and IoT based payments	Reemi Suryawanshi	Zeeshan Khan	Removal of Payee Tag in section 2.1.4
1.2	Embedded and IoT based payments	Reemi Suryawanshi	Zeeshan Khan	Change in section 2.3.1, 2.3.3 removal of primary party VPA
1.3	Embedded and IoT based payments	Reemi Suryawanshi	Zeeshan Khan	From Section 3.1.4, 3.2.2 , 3.3.2, 3.3.4 Payer ref amount, currency is removed, Payee ref is removed. Section 3.3.4

				Validity is removed. Section 3.2.4, 3.2.3 rule tag is removed. Addition of Section 2 Design Flow
1.4	Embedded and IoT based payments	Reemi Suryawanshi, Agathiyan J	Zeeshan Khan	Note added in section 3.4.2
1.5	Embedded and IoT based payments	Reemi Suryawanshi	Zeeshan Khan	Addition of Ac tag in Section 3.1.3 and replacement of PSP1 to PSPe. In Section 3.2.1, 3.2.3 Replacement of PSP1 to PSPo.
1.6	Embedded and IoT based payments	Reemi Suryawanshi	Zeeshan Khan	Addition of Ac tag in sec 3.3.1, 3.3.3. In Sec 3.1.4 added note
1.7	Embedded and IoT based payments	Reemi Suryawanshi	Zeeshan Khan	Change in ReqRegED and RespRegED Removal of Start time and Validity Period), Removal of Additional Ac tag from section 3.3.1 & 3.3.3. Added Account details in Rule tag if 3.3.1 and 3.3.3. Note Added in ReqPay
1.8	Embedded and IoT based payments	Reemi Suryawanshi	Zeeshan Khan	In Sec 3.2.1, 3.2.3 Removal of Additional Ac tag and Added Account details in Rule tag.

1 Introduction

This document describes the changes in UPI for Embedded and IoT based Payments implementation. This includes changes in the existing API flow along with tag level changes.

2 Design Flow (Device with interface and with internet)

2.1 (a) Device Binding

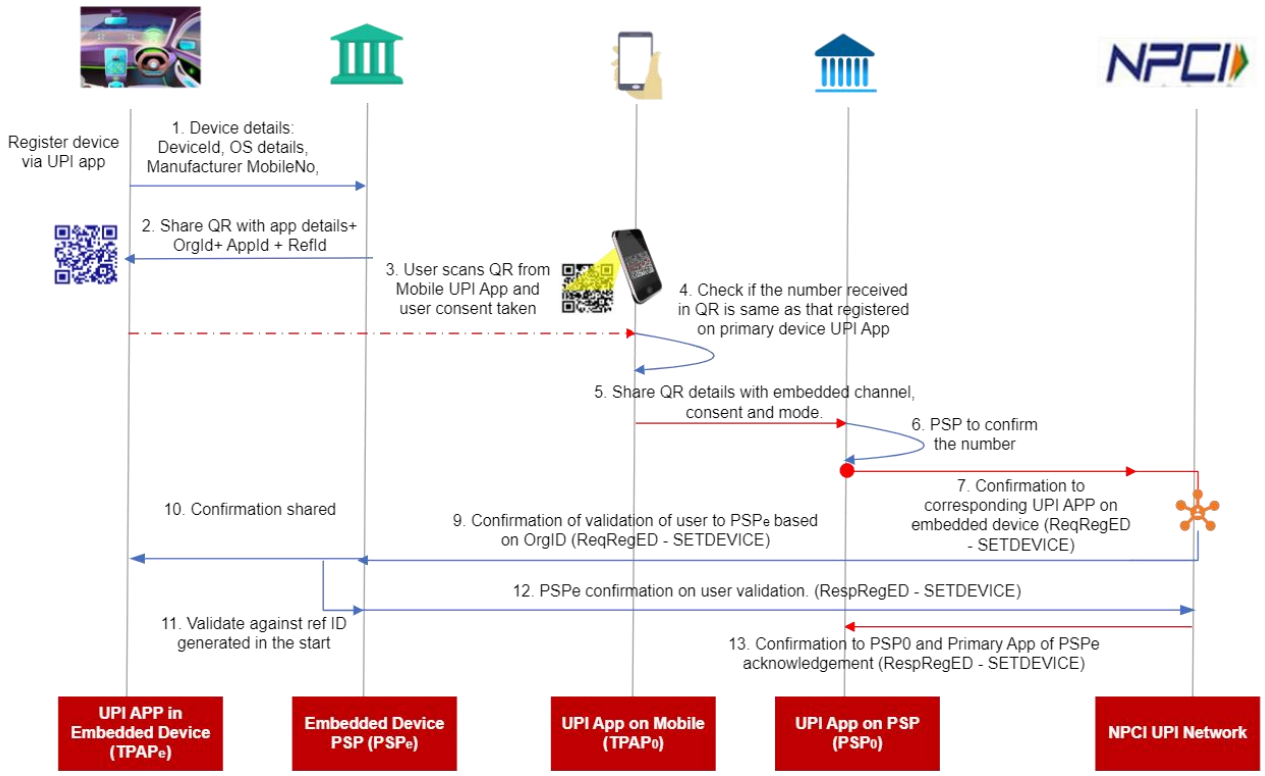

Embedded device UPI Registration:

Registration can be done by any UPI enable on users pre-registered UPI APP. This will make the solution interoperable, and Manufacturer does not necessarily become a TPAP to the device binding and registration.

Note - If user is the first-time user of primary app then the user has to onboard itself on the UPI app of the primary app as per existing process of UPI on mobile phones.

Steps

2.1 (b) CL Registration Secondary App

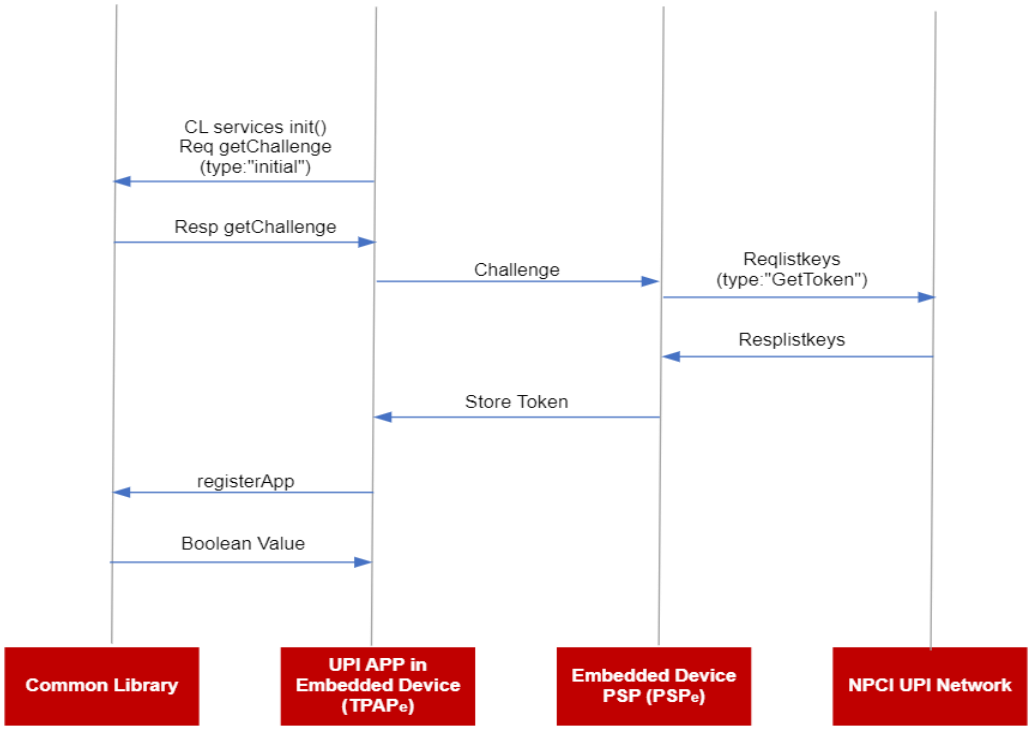

2.2 Registration

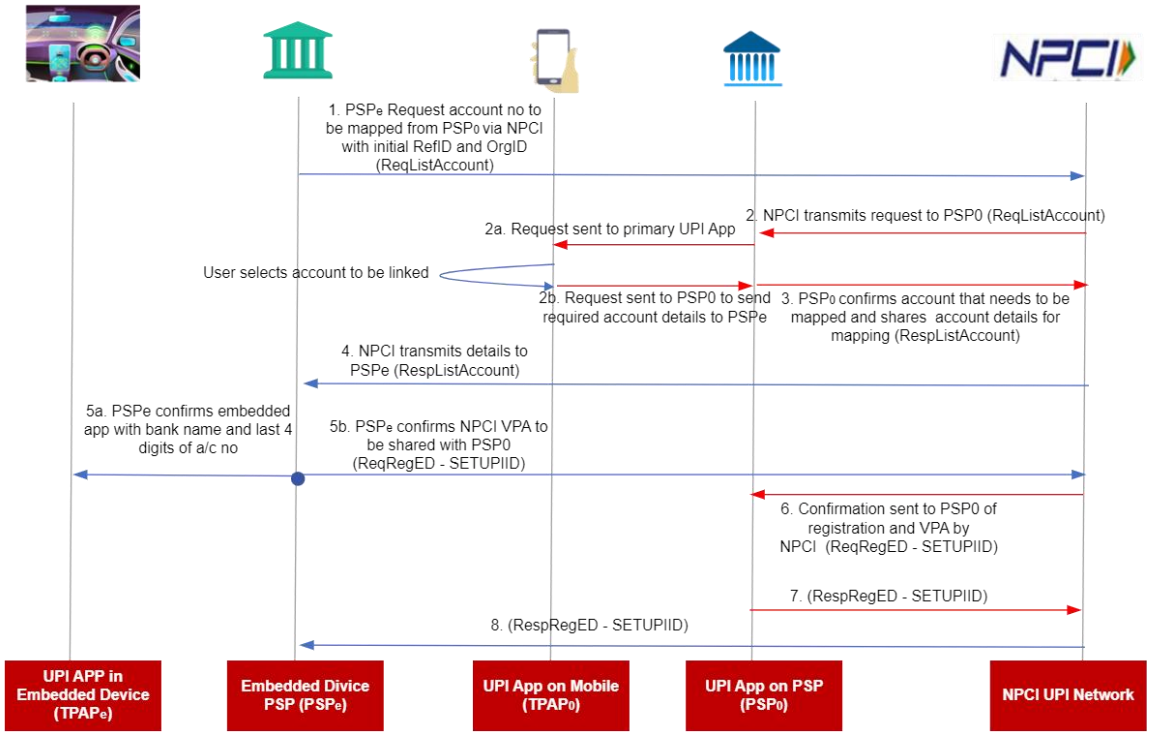

2.3 Payment Flow

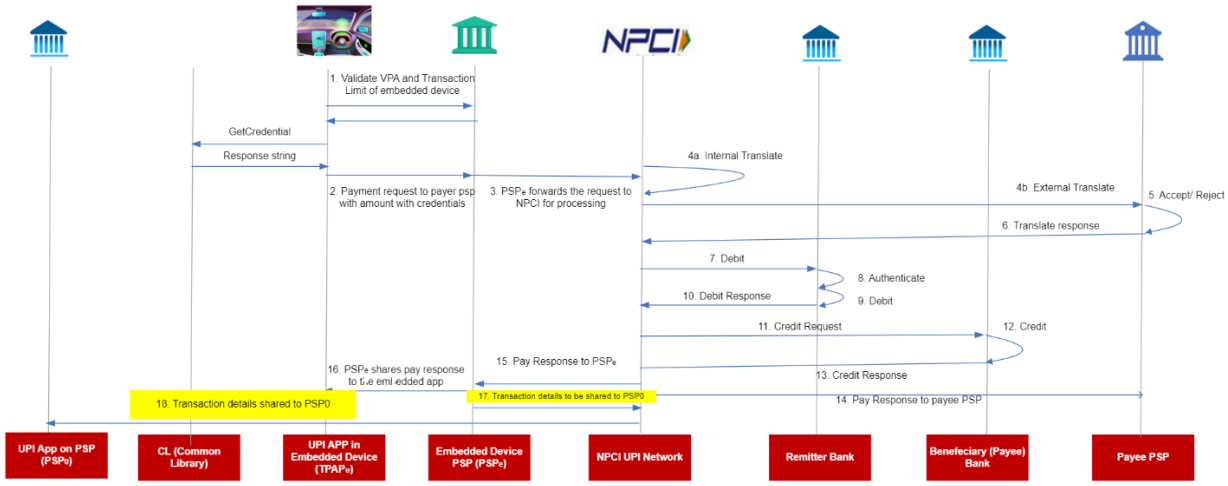

2.4 To limit setup, modification, and cancellation for dependent device

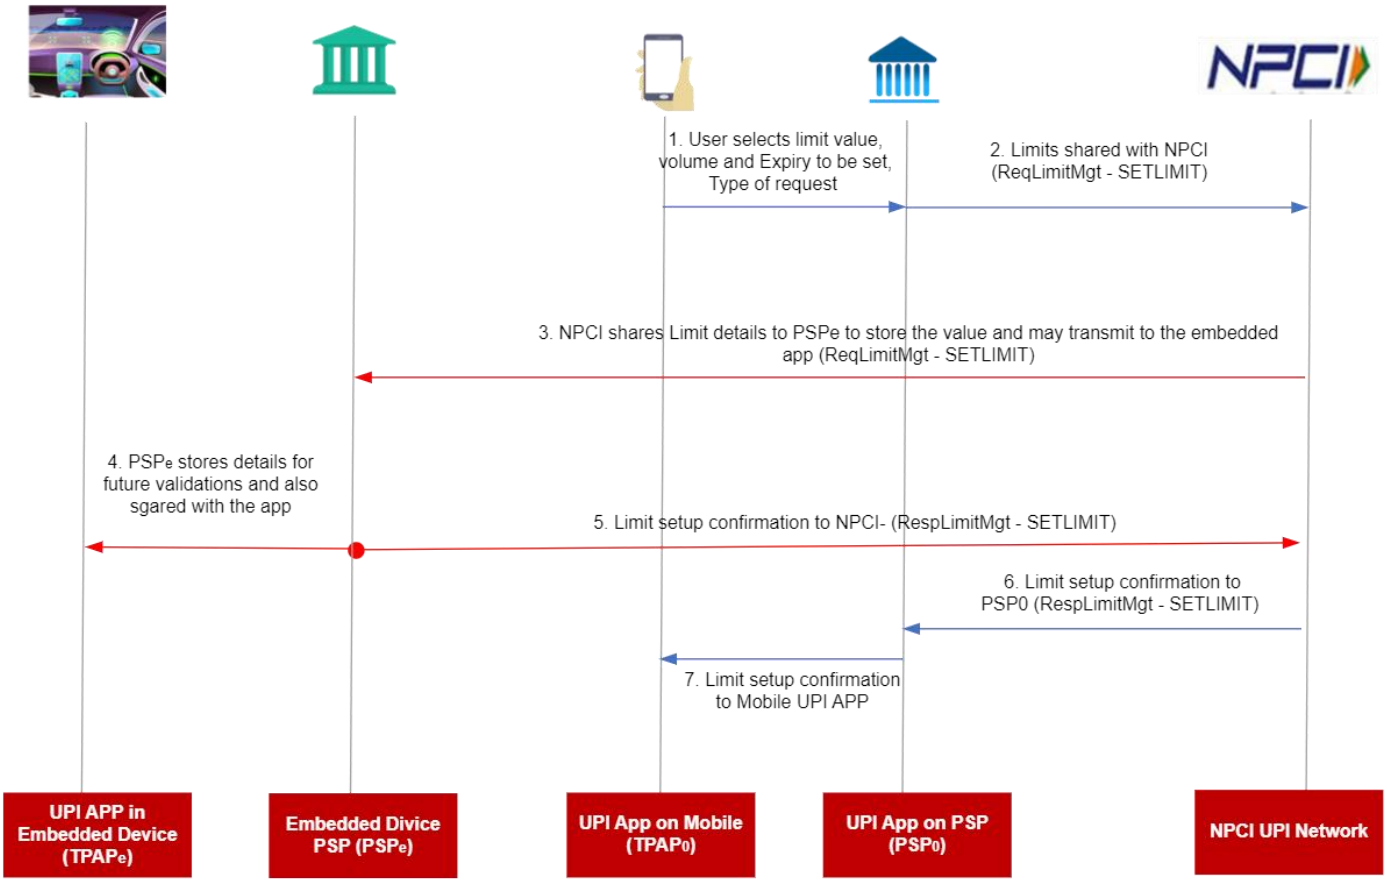

2.5 Limit query of dependent device through primary device

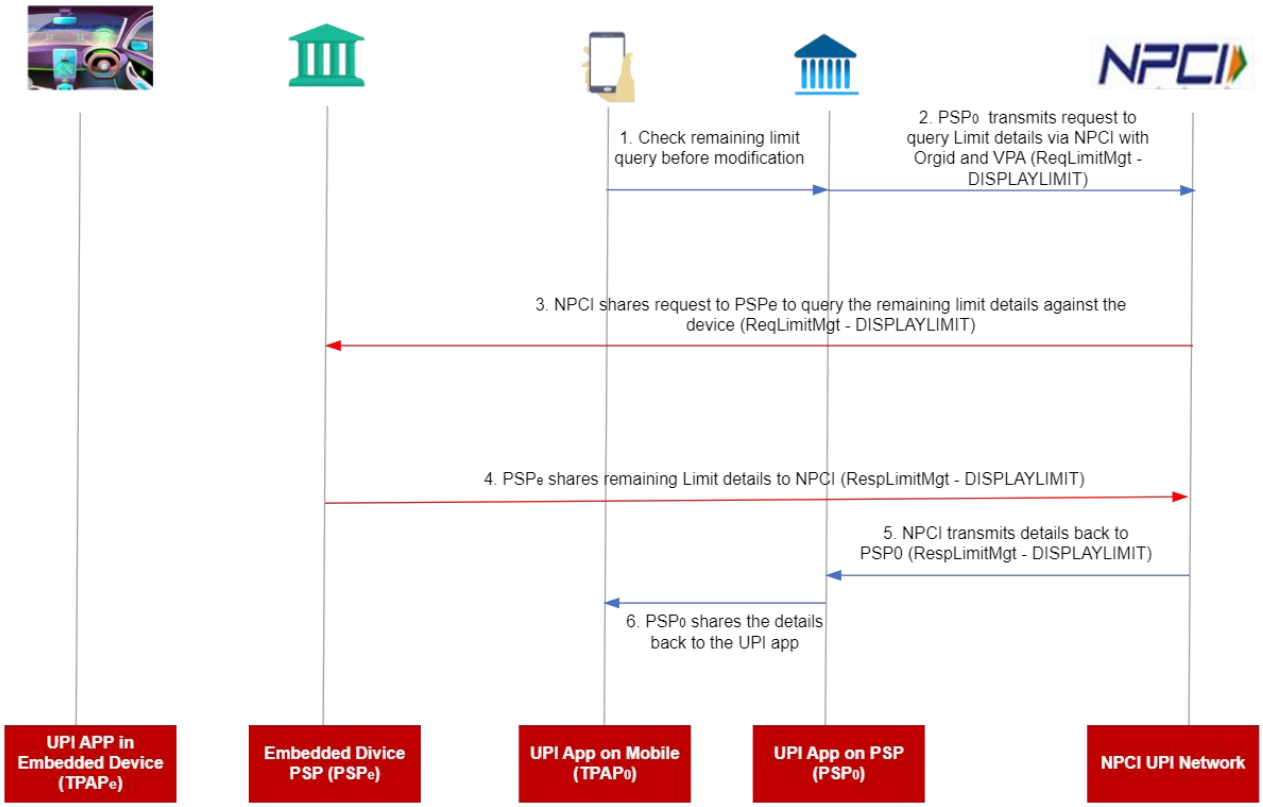

2.6 (a) Deregistration (Primary App initiated)

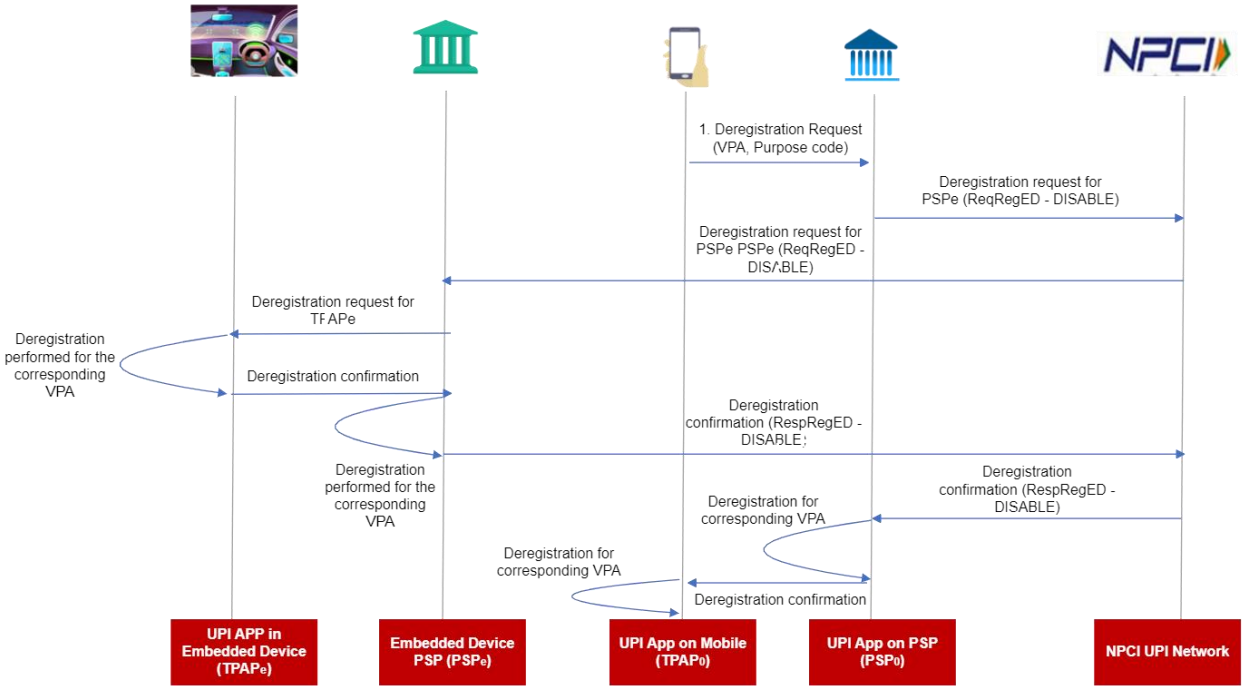

2.7 (b) Deregistration (Secondary App initiated)

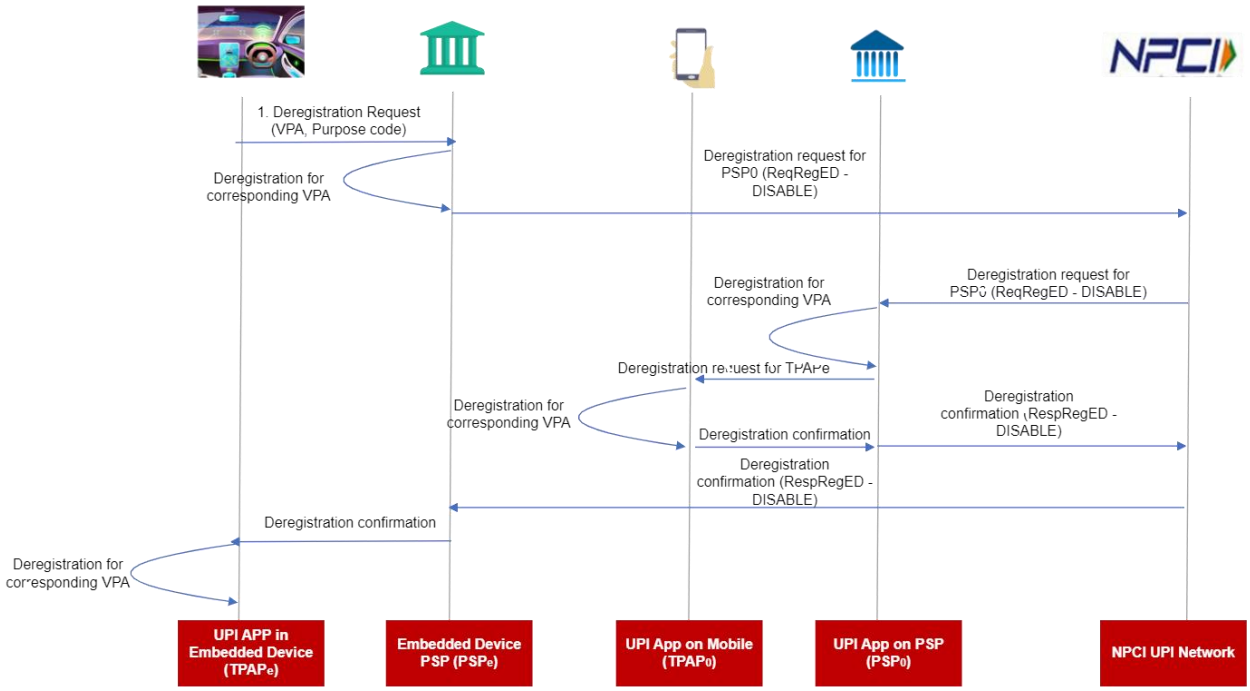

3 API Specifications

Sr. No.	Step	Description	API	Parameters (M)	Parameters(O)	Path of API
1	Device Binding	Device Binding confirmation API to inform PSPe after successful device binding of dependent device	New	refID, orgID, mobile number, start date, end date, timestamp, status, purpose code, type, consent, device type "embedded", GeoLocation	Device ID, app ID, OS, version, model, OS, initiating channel, initiation mode	NPCI to PSPe
2	Registration	To send account details to PSPe and back confirmation to generate VPA	New	Account details, bank identification, orgID (pspe and psp0), timestamp, purpose code, type, device type "embedded"	Device ID, mobile no., IP, OS, App ID, initiating channel, initiation mode	Req - PSPe to NPCI to PSP0 Resp - PSP0 to NPCI to PSPe
3	Limit Set	To set limits for dependent device	New	Expiry, value, volume, VPA, timestamp, purpose code, type, device type "embedded"	Device ID, mobile no., IP, OS, App ID, initiating channel, initiation mode	Req - PSP0 to NPCI to PSPe Resp - PSPe to NPCI to PSP0
4	Limit Balance Check	To check the remaining limits for the dependent device	New	Expiry, value, volume, orgID (pspe and psp0), VPA, start date, end date, timestamp, purpose code, type, device type "embedded"	Device ID, mobile no., IP, OS, App ID, initiating channel, initiation mode	Req - PSP0 to NPCI to PSPe Resp - PSPe to NPCI to PSP0
5	VPA registration	After the VPA is generated by PSPe, PSPe sends the VPA to NPCI to store and NPCI further sends to PSP0	New	VPA, orgID (pspe and psp0), mob no, timestamp, purpose code, type, device type "embedded"	Device ID, mobile no., IP, OS, App ID, initiating channel, initiation mode	Req - PSPe to NPCI to PSP0 Resp - NPCI to PSPe
6	Deregistration	After user initiates deregistration from TPAP0, PSP0 should inform the same to PSPe and PSPe should deregister the user from TPAPe. It should happen both ways, even if initiated from TPAPe	New	VPA, , mob no, timestamp, purpose code, type, device type "embedded", orgID (pspe and psp0)	Device ID, mobile no., IP, OS, App ID, initiating channel, initiation mode	Req - PSP0 to NPCI to PSPe Resp - PSPe to NPCI to PSP0 OR Req - PSPe to NPCI to PSP0 Resp - PSP0 to NPCI to PSPe
7	Payment	To send payment confirmation to PSP0	Existing API	Transaction details, Parent VPA (TPAP0), Org ID (PSP0), mob no, timestamp, purpose code, type, device type "embedded", orgID (pspe and psp0), Device ID, mobile no., IP, OS, App ID, initiating channel, initiation mode		NPCI to PSP0, NPCI to PSPe

3.1 Register Embedded Device API

The API covers the **Device binding confirmation** which is provided from Primary device (PSPo) to Embedded device (PSPe), Limit Set and Limit Balance check, VPA generated at PSPe is populated to PSPo.

Note:

1. **There will be no change in existing Device binding flow for Primary device, the following API's are only for Embedded Device (secondary device) device binding.**
2. **New purpose code is assigned for Embedded Payment**
3. **New initiation mode will also be assigned.**

3.1.1 ReqRegED API From PSPo to UPI to PSPe: SETDEVICE


```
<ns2:ReqRegED xmlns:ns2="http://npci.org/upi/schema/">

<Head ver="2.0" ts="2024-02-21T15:21:04+05:30" orgId="PSPo"
msgId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk"/>

<Txn id="XXX0000000000001GRDiejTt4C2MyWOZJeM" note=""
refId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk" refUrl="http://upi" ts="2022-12-08T12:12:18"
type="SETDEVICE|SETUPIID|DISABLE" orgTxnId="" initiationMode="33|34|35" purpose="83" />

        <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">            <Device>


                <Tag name="GEOCODE" value="123,456"/>

                <Tag name="LOCATION" value="0.0,0.0"/>

                <Tag name="IP" value="192.168.1.100"/>

                <Tag name="TYPE" value="”MOBILE"/>

                <Tag name="MOBILE" value=""/>

                <Tag name="ID" value="3616d7b816c05115"/>

                <Tag name="OS" value="Android"/>

                <Tag name="APP" value="org.npci.bhim"/>

                <Tag name="CAPABILITY" value="1"/>

                <Tag name="MANUFACTURER" value=" "/>

                <Tag name="MODEL" value=" "/>

                <Tag name="USERCONSENT" value="Y/N"/>

            </Device>

             <Ac addrType="ORG">

    <Detail name="ORGID" value=""/>  PSPe

  </Ac>
```

```
<QR   QrPayLoad="">
        <EmbeddedDevice>
                <Tag name="TYPE" value="CAR"/>
                <Tag name="MODE" value=""/>
                <Tag name="ORGID" value="PSPe"/>
                <Tag name="DEVICEID" value=""/>
                <Tag name="APP" value="org.npci.bhim"/>
                <Tag name="MOBILE" value="9500000891"/>
                <Tag name="GEOCODE" value=""/>
        </EmbeddedDevice>
</QR>
</Payer>
</ns2:ReqRegED>
```

Note:

1. The mobile number of Primary device and QR details should be same.

2. The validityPeriod and orgTxnId is optional

3.1.2 RespRegED API From PSPe to UPI to PSPo: SETDEVICE

```
<upi:RespRegED  xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId=""/>
<Txn id="" note="" refId="" refUrl="" ts="" type=" SETUPIID|SETDEVICE |DISABLE" orgTxnId="" appID= ”” initiationMode="33|34|35"  purpose="83" />
<Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
</upi:RespRegED>
```

3.1.3 ReqRegED API From PSPe to UPI to PSPo: SETUPIID

```
<ns2:ReqRegED xmlns:ns2="http://npci.org/upi/schema/">
<Head ver="2.0" ts="2024-02-28T17:51:41+05:30" orgId="PSPe" msgId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk"/>
```

```
<Txn id="XXX0000000000001GRDiemTrqBmBtVOZRks" note=""
refId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk" refUrl="http://upi" ts="2022-12-08T12:12:18"
type="SETDEVICE|SETUPIID|DISABLE " orgTxnId="" initiationMode="33|34|35" purpose="83" />

        <Payer addr="" name="" seqNum="" code="">
                <Device>
                        <Tag name="ORGID" value=""/>
                        <Tag name="VPAEMBD" value=""/>
                        <Tag name="TIMESTAMP" value=""/>
                        <Tag name="DEVICECATEGORY" value=""/>
                        <Tag name="MOBILE" value=""/>
                        <Tag name="TYPE" value=""/>
                </Device>
<Ac addrType="ORG">
      <Detail name="ORGID" value=""/>  PSPo
    </Ac>

        </Payer>
</ns2:ReqRegED>
```


3.1.4 RespRegED API From PSPo to UPI to PSPe: SETUPIID


```
<upi:RespRegED  xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId=""/>
<Txn id="" note="" refId="" refUrl="" ts=""
type="SETDEVICE|SETUPIID|DISABLE orgTxnId="" appID= ”” initiationMode="33|34|35"
purpose="83" />

<Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="">

<Ref type="PAYER" seqNum="1" addr="bhalkubham@mypsp" approvalNum="307983"
respCode="00"  regName=""  acNum="117795514570"  IFSC="AABY0036037"  code="0000"
accType="SAVINGS">
```

```
</Ref>

</Resp>
</ns2:ResqRegED>
```

Note: The refID of QR will be captured and populated in refID of txn.

3.2 Limit Management API

3.2.1 ReqLimitMgt API From PSPo to UPI to PSPe: SETLIMIT

```
<ns2:ReqLimitMgt  xmlns:ns2="http://npci.org/upi/schema/">
<Head ver="2.0" ts="2024-02-28T16:02:35+05:30" orgId="PSPo"
msgId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk"/>
<Txn id="XXX0000000000001GRDiemTrqBmBiplN5ok" note=" "
refId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk" refUrl="http://upi" ts="2022-12-08T12:12:18"
type="SETLIMIT|DISPLAYLIMIT orgTxnId="" initiationMode="33|34|35"  purpose="83"/>
        <Rules>
            <Rule name="AMOUNTVALUE" value=""/>
            <Rule name="VOLUMECOUNT" value=""/>
            <Rule name="LIMITEXPIRY" value=""/>
            <Rule name="VPAEMBD" value=""/>
            <Rule name="DEVICECATEGORY " value=""/>
            <Rule name="TYPE" value=""/>
            <Rule name="IFSC" value=""/>
            <Rule name="ACTYPE" value=""/>
            <Rule name="ACNUM" value=""/>

        </Rules>
    </Txn>
<Payer addr="" name="" seqNum="" code="">
        <Device>
            <Tag name="GEOCODE" value="123,456"/>
```

```
<Tag name="LOCATION" value="0.0,0.0"/>
<Tag name="IP" value="192.168.1.100"/>
<Tag name="TYPE" value="MOBILE "/>
<Tag name="ID" value="3616d7b816c05115"/>
<Tag name="OS" value="Android"/>
<Tag name="APP" value="org.npci.bhim"/>
<Tag name="CAPABILITY" value="1"/>
<Tag name="MANUFACTURER" value="Xiaomi"/>
<Tag name="MODEL" value="Redmi Note 7 Pro"/>
<Tag name="USERCONSENT" value="Y/N"/>
</Device>
<Ac addrType="ORG">
<Detail name="ORGID" value=""/>   //orgID of PSPe
</Ac>
</Payer>

</ns2:ReqLimitMgt>
```


3.2.2 RespLimitMgt API From PSPe to UPI to PSPo: SETLIMIT


```
<upi:RespLimitMgt  xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId=""/>
<Txn id="" note="" refId="" refUrl="" ts="” type="SETLIMIT|DISPLAYLIMIT" orgTxnId="" appID= ””,
initiationMode=""33|34|35""  purpose="83"  />
<Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="">
<Ref type="PAYER" seqNum="1" addr="bhalkubham@mypsp" approvalNum="307983"
respCode="00"  regName=""  acNum="117795514570"  IFSC="AABY0036037"  code="0000"
accType="SAVINGS">
</Ref>
</Resp>
</upi:RespLimitMgt/>
```

3.2.3 ReqLimitMgt API From PSPo to UPI to PSPe: DISPLAYLIMIT


```
<upi:ReqLimitMgt xmlns:upi="http://npci.org/upi/schema/">

<Head ver="2.0" ts="2024-02-28T16:02:35+05:30" orgId="PSPo"
msgId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk"/>

<Txn id="XXX0000000000001GRDiemTrqBmBiplN5ok" note=""
refId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk" refUrl="http://upi" ts="2022-12-08T12:12:18"
type="SETLIMIT|DISPLAYLIMIT" orgTxnId="" initiationMode="33|34|35"  purpose="83" >

</Txn>

<Rules>

                    <Rule name="IFSC" value=""/>

                    <Rule name="ACTYPE" value=""/>

                    <Rule name="ACNUM" value=""/>


</Rules>


<Payer addr="" name="" seqNum="" code="">

            <Device>

                    <Tag name="GEOCODE" value="123,456"/>

                    <Tag name="LOCATION" value="0.0,0.0"/>

                    <Tag name="IP" value="192.168.1.100"/>

                    <Tag name="TYPE" value="MOBILE "/>

                    <Tag name="ID" value="3616d7b816c05115"/>

                    <Tag name="OS" value="Android"/>

                    <Tag name="APP" value="org.npci.bhim"/>

                    <Tag name="CAPABILITY" value="1"/>

                    <Tag name="MANUFACTURER" value="Xiaomi"/>

                    <Tag name="MODEL" value="Redmi Note 7 Pro"/>

                    <Tag name="USERCONSENT" value="Y/N"/>

</Device>


            <Ac addrType="ORG">
```

```
    <Detail name="ORGID" value="111011"/>      //orgID of PSPe
  </Ac>
      </Payer>

</ns2:ReqLimitMgt>
```

3.2.4 RespLimitMgt API From PSPe to UPI to PSP0: DISPLAYLIMIT

```
<upi:RespLimitMgt  xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId=""/>
<Txn id="" note="" refId="" refUrl="" ts="" type="SETLIMIT|DISPLAYLIMIT " orgTxnId="" appID= "",
initiationMode="33|34|35"  purpose="83" deviceType="Embedded"  >
</Txn>

<Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
<Ref type="PAYER" seqNum="1" addr="bhalkubham@mypsp" approvalNum="307983"
respCode="00"    regName=""    acNum="117795514570"    IFSC="AABY0036037"    code="0000"
accType="SAVINGS">
</Ref>
 <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
        <Limits>
            <Limit name ="" value ="" count="" />>

        </ Limits >
 </Payer>
</upi:RespLimitMgt>
```

3.3 Disable Embedded Device

3.3.1 ReqRegED API From PSPo to UPI to PSPe : DISABLE Initiated By Primary Device

```
<ns2:ReqRegED xmlns:ns2="http://npci.org/upi/schema/">
<Head ver="2.0" ts="2024-02-28T18:01:09+05:30" orgId="PSPo"
msgId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk"/>
```

```
<Txn id="XXX0000000000001GRDiemTrqBmBuVSEHXa" note=""
refId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk" refUrl="http://upi" ts="2022-12-08T12:12:18"
type="SETDEVICE|SETUPIID|DISABLE " orgTxnId="" initiationMode="33|34|35"  purpose="83" >
<Rules>
        <Rule name="VPAEMBD" value=""/>
        <Rule name="MOBILE" value=""/>
        <Rule name="DEVICECATEGORY" value=""/>
        <Rule name="TYPE" value=""/>
        <Rule name="USERCONSENT" value="Y/N"/>
        <Rule name="IFSC" value=""/>
        <Rule name="ACTYPE" value=""/>
        <Rule name="ACNUM" value=""/>

</Rules>
</Txn>
        <Payer addr="" name="" seqNum="" code="">
                <Device>
                        <Tag name="ORGID" value=""/>
                        <Tag name="TIMESTAMP" value=""/>
                        <Tag name="MOBILE" value=""/>
                        <Tag name="TYPE" value=""/>
                </Device>
                <Ac addrType="ORG">
                        <Detail name="ORGID" value=""/>     /orgID of PSPe
                 </Ac>
        </Payer>
</ns2:ReqRegED>
```


Note:
Rule tag is optional in this API

3.3.2 RespRegED API From PSPe to UPI to PSPo: DISABLE


```
<upi:RespRegED  xmlns:upi="http://npci.org/upi/schema/">

<Head ver="2.0" ts="" orgId="" msgId=""/>

<Txn id="" note="" refId="" refUrl="" ts="" startTime="" validityPeriod="" type="SETDEVICE|SETUPIID|DISABLE " orgTxnId="" initiationMode="33|34|35"  purpose="83" >

<Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="">

<Ref type="PAYER" seqNum="1" addr="bhalkubham@mypsp" approvalNum="307983"

respCode="00"  regName=""  acNum="117795514570"  IFSC="AABY0036037"  code="0000" accType="SAVINGS">

</Ref>

</Resp>

</upi:RespRegED>
```


3.3.3 ReqRegED API From PSPe to UPI to PSPo: DISABLE Initiated By Embedded Device


```
<ns2:ReqRegED xmlns:ns2="http://npci.org/upi/schema/">

<Head ver="2.0" ts="2024-02-28T18:01:09+05:30" orgId="PSPe" msgId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk"/>

<Txn id="XXX0000000000001GRDiemTrqBmBuVSEHXa" note="SYNC" refId="001z471mSJPg4ykHhLViLcvkTFd1hR31nRk" refUrl="http://upi" ts="2022-12-08T12:12:18" type="SETDEVICE|SETUPIID|DISABLE " orgTxnId="" initiationMode="33|34|35"  purpose="83" >

<Rules>

    <Rule name="VPA" value=""/>

    <Rule name="MOBILE" value=""/>

    <Rule name="DEVICECATEGORY" value=""/>

    <Rule name="TYPE" value=""/>

    <Rule name="USERCONSENT" value="Y/N"/>

    <Rule name="IFSC" value=""/>
```

```
            <Rule name="ACTYPE" value=""/>
            <Rule name="ACNUM" value=""/>

    </Rules>
    </Txn>
            <Payer addr="" name="" seqNum="" code="">
                    <Device>
                            <Tag name="ORGID" value=""/>
                            <Tag name="TIMESTAMP" value=""/>
                            <Tag name="MOBILE" value=""/>
                            <Tag name="TYPE" value=""/>
                    </Device>
                    <Ac addrType="ORG">
                            <Detail name="ORGID" value="PSPo"/>
                     </Ac>

            </Payer>
    </ns2:ReqRegED>
```

3.3.4 RespRegED API From PSPo to UPI to PSPe: DISABLE

```
<upi:RespRegED  xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId=""/>
<Txn id="" note="" refId="" refUrl="" ts="" startTime="" type="SETDEVICE|SETUPIID|DISABLE "
orgTxnId="" initiationMode="33|34|35"   purpose="83" >

<Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="">

<Ref type="PAYER" seqNum="1" addr="bhalkubham@mypsp approvalNum="307983"

 respCode="00"  regName=""  orgAmount="1000.00"  acNum="117795514570"  IFSC="AABY0036037"
code="0000" accType="SAVINGS">

</Ref>

</Resp>
```

```
</upi:RespRegED>
```

3.4 List Account API

Embedded PSP (PSPe) will get the Account details from PSP0, Additional parameter needs to added in Transaction which is mandatory for PSPe, in the absence of this parameter from PSPe the request will be declined by NPCI

3.4.1 ReqListAccount From PSPe to UPI to PSPo.

```
<upi: ReqListAccount xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="2.0" ts="" orgId="" msgId=""/>
<Txn id="" note="" refId="" refUrl="" ts="" type=" ListAccount " purpose="83" />
        <Link type="MOBILE|AADHAAR" value=""/>
        <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code=""
aadhaarConsent="Y|N">
                <Device>
                        <Tag name="MOBILE" value=""/>
                        <Tag name="GEOCODE" value=""/>
                        <Tag name="LOCATION" value="" />
                        <Tag name="IP" value=""/>
                        <Tag name="TYPE" value="Embedded"/>
                        <Tag name="ORGIDPSPe" value="" />
                        <Tag name="ID" value=""/>
                        <Tag name="OS" value=""/>
                        <Tag name="APP" value=""/>
                        <Tag name="CAPABILITY" value=""/>
                        <Tag name="TELECOM" value=""/>
                </Device>

                <Ac addrType="ORG">
                        <Detail name="ORGID" value=""/> orgID of PSPo
                 </Ac>
        </Payer>
```

```
        </Payer>
</upi:ReqListAccount >
```

3.4.2 RespListAccount From PSPo to UPI to PSPe.

```
<upi:RespListAccount xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="1.0|2.0" ts="" orgId="" msgId=""/>
        <Txn id="" note="" refId="" refUrl="" ts="" type="" purpose="83" />
        <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
        <AccountList>
<Account accType="" mbeba="" accRefNumber="" maskedAccnumber="" ifsc="" mmid="" name="" aeba="Y|N">
                <CredsAllowed type="PIN" subType="MPIN" dType="" dLength=""/>
                <CredsAllowed type="PIN" subType="ATMPIN" dType="" dLength=""/>
                <CredsAllowed type="OTP" subType="SMS" dType="" dLength=""/>
            </Account>
        </AccountList>
</upi:RespListAccount>
```

NOTE:

1. mbeba : Mbeba flag is used to mention the UPI PIN availabilitiy maskedAccnumber="" ifsc="HDFC0000101" mmid="9056014" name="" aeba="Y/N" aadhaarNo='1234 5678 9012"
2. aadhaarNo : if user consent for Aadhaar (aadhaarConsent) is "Y" and aeba="Y" then bank should send the Aadhaar no. Masked accout.no should be masked with capital letter"X"
3. The refID of QR will be captured and populated in refID of txn.

3.5 Payment using Embedded Payments

3.5.1 ReqPay (From Payer PSPe to UPI)

```
<upi:ReqPay xmlns:upi="http://npci.org/upi/schema/">
        <Head ver="1.0|2.0" ts="" orgId="" msgId="" prodType= "UPI|IMPS|AEPS"/>
        <Meta>
            <Tag name="PAYREQSTART" value=""/>
            <Tag name="PAYREQEND" value=""/>
        </Meta>
```

```
<Txn id="" note="" custRef="" refId="" refUrl="" ts="" refCategory="" type="PAY" orgTxnId="" purpose="83" initiationMode="33|34|35" subType="" orgRespCode="">
        <RiskScores>
            <Score provider="sp" type="TXNRISK" value=""/>
            <Score provider="npci" type="TXNRISK" value=""/>
        </RiskScores>
        <Rules>
            <Rule name="EXPIREAFTER" value="1 minute to max 64800 minutes"/>
            <Rule name="MINAMOUNT" value=""/>
        </Rules>
        <QR qVer="" ts="" qrMedium="" expireTs="" query="" verToken="" stan=""/>
    </Txn>
    <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
        <Merchant>
            <Identifier subCode="" mid="" sid="" tid="" merchantType="SMALL|LARGE" merchantGenre="OFFLINE|ONLINE" onBoardingType="BANK|AGGREGATOR|NETWORK|TPAP" pinCode="" regIdNo="" tier="" merchantLoc="" merchantInstId="" />
            <Ownership type="PROPRIETARY|PARTNERSHIP|PRIVATE|PUBLIC|OTHERS"/>
            <Invoice name="" num="" date="" />
        </Merchant>
        <Institution type="MTO|BANK" route="MTSS|RDA">
            <Name value="" acNum=""/>
            <Purpose code="" note=""/>
            <Originator name="" type="INDIVIDUAL|COMPANY" refNo="">
                <Address location="" city="" country="" geocode=""/>
            </Originator>
            <Beneficiary name=""/>
        </Institution>
        <Info>
            <Identity id="" type="PAN|AADHAAR|ACCOUNT" verifiedName="" />
            <Rating VerifiedAddress="TRUE|FALSE"/>
        </Info>
```

```
<Device>
        <Tag name="MOBILE" value=""/>
        <Tag name="GEOCODE" value=""/>
        <Tag name="LOCATION" value="" />
        <Tag name="IP" value=""/>
        <Tag name="TYPE" value=""/>
        <Tag name="ID" value=""/>
        <Tag name="OS" value=""/>
        <Tag name="APP" value=""/>
        <Tag name="CAPABILITY" value=""/>
        <Tag name="TELECOM" value=""/>
        <Tag name="cardAccpTrId" value=""/>
        <Tag name="cardAccIdCode" value=""/>
        <Tag name="posEntryCode" value=""/>
        <Tag name="posServCdnCode" value=""/>
</Device>
<Ac  addrType ="AADHAAR">
        <Detail  name="IIN" value=""/>
        <Detail name="UIDNUM" value=""/>
</Ac>
<Ac addrType="ACCOUNT">
        <Detail name="IFSC" value=""/>
        <Detail name="ACTYPE" value=""/>
        <Detail name="ACNUM" value=""/>
</Ac>
<Ac addrType ="MOBILE">
        <Detail name="MMID" value=""/>
        <Detail name="MOBNUM" value=""/>
</Ac>
<Ac addrType ="CARD">
        <Detail name="ACTYPE" value="SAVINGS|CURRENT|DEFAULT"/>
        <Detail name="CARDNUM" value=""/>
</Ac>
```

```
<Consent name="GST" type="PAN|AADHAAR|AADHAARTOKEN
PASSPORT|VOTERID|DRIVINGLICENSE" value=""/>
<Creds>
<Cred type="AADHAAR" subType="AADHAAR-BIO-FP|AADHAAR-BIO-
IRIS|AADHAAR-BIO-OTP">
<Meta lk="" ac="" sa="" uid="" ver=""/>
<Data code="" Ki=""> base-64 encoded/ encrypted authentication data </Data>
</Cred>
<Cred type="UPI-Mandate" subType="DS">
<Data> base-64 encoded digitally signed UPI-Mandate</Data>
</Cred>
<Cred type="OTP" subType="SMS|EMAIL|HOTP|TOTP">
<Data code="" ki="">base-64 encoded/encrypted authentication data</Data>
</Cred>
<Cred type="PIN" subType="MPIN">
<Data code="" ki=""> base-64 encoded/encrypted authentication data</Data>
</Cred>
<Cred type="CARD" subType="CVV1|CVV2|EMV">
<Data code="" ki=""> base-64 encoded/encrypted authentication data</Data>
</Cred>
<Cred type="PREAPPROVED" subType="NA">
<Data> base-64 encoded</Data>
</Cred>
</Creds>
<Amount value="" curr="INR">
<Split name="" value=""/>
</Amount>
</Payer>
<Payees>
<Payee addr="" name="" seqNum="" type="PERSON|ENTITY" code="" >
<Institution QrPayLoad="" conCode="" netInstId=""/>
<Merchant>
```

```
                    <Identifier subCode="" mid="" sid="" tid=""
merchantType="SMALL|LARGE" merchantGenre="OFFLINE|ONLINE"
onBoardingType="BANK|AGGREGATOR|NETWORK|TPAP" pinCode="" regIdNo="" tier=""/>
<Ownership type="PROPRIETARY|PARTNERSHIP|PRIVATE|PUBLIC|OTHERS"/>
                    <Invoice name="" num="" date="" />
                </Merchant>
                <Info>
                <Identity id="" type="PAN|AADHAAR|ACCOUNT" verifiedName=""/>
                    <Rating VerifiedAddress="TRUE|FALSE"/>
                </Info>
                <Device>
                    <Tag name="MOBILE" value=""/>
                    <Tag name="GEOCODE" value=""/>
                    <Tag name="LOCATION" value="" />
                    <Tag name="IP" value=""/>
                    <Tag name="TYPE" value=""/>
                    <Tag name="ID" value=""/>
                    <Tag name="OS" value=""/>
                    <Tag name="APP" value=""/>
                    <Tag name="CAPABILITY" value=""/>
                    <Tag name="TELECOM" value=""/>
                </Device>
                <Ac  addrType ="AADHAAR">
                    <Detail  name="IIN" value=""/>
                    <Detail name="UIDNUM" value=""/>
                </Ac>
                <Ac addrType="ACCOUNT">
                    <Detail name="IFSC" value=""/>
                    <Detail name="ACTYPE" value=""/>
                    <Detail name="ACNUM" value=""/>
                </Ac>
            <Consent name="GST" type="PAN|AADHAAR|AADHAARTOKEN
PASSPORT|VOTERID|DRIVINGLICENSE" value=""/>
                <Amount value="" curr="INR">
```

```
                    <Split name="" value=""/>
                </Amount>
            </Payee>
        </Payees>
</upi:ReqPay>
```


Note :

1. In Payer device Tag, the details related to Card and Post are Optional.

3.5.2 ReqAuthDetails from UPI to Payee PSP


```
<ns2:ReqAuthDetails xmlns:ns2="http://npci.org/upi/schema/"
xmlns:ns3="http://npci.org/cm/schema/">
<Head ver="2.0" ts="2019-06-11T13:21:51+05:30" orgId="NPCI"
msgId="1GRDpegAQsFrxHwxghBu"/>
<Txn id="UPI0942748834dk0GUANtBpLYqGjL" note="UPI" refId="12345"
refUrl="https://www.google.co.in" ts="2019-06-11T13:21:50+05:30" type="PAY"
custRef="124921100002" initiationMode="33|34|35"
purpose="83" ><RiskScores/></Txn><Payees><Payee
addr="merchant@acqpsp" name="test1" seqNum="1"
type="PERSON" code="0000"><Amount value="1000.00" curr="INR"/></Payee></Payees><Payer
addr="bhalkubham@mypsp" name="Bhalku Bham"
 seqNum="1" type="PERSON" code="0000"><Info><Identity type="ACCOUNT" verifiedName=""
id=""/>
 <Rating verifiedAddress="TRUE"></Rating></Info><Ac addrType="ACCOUNT"><Detail name="IFSC"
value="AABY0036037"/>
 <Detail name="ACTYPE" value="SAVINGS"/><Detail name="ACNUM" value="117795514570" />
</Ac><Amount value="1000.00" curr="INR"/></Payer>
 </ns2:ReqAuthDetails>
```


3.5.3 RespAuthDetails from Payee PSP


```
<upi:RespAuthDetails xmlns:upi="http://npci.org/upi/schema/">
  <Head msgId="ICIf06061d4fe4e4e7895930da7d1a11072" orgId="190001"
    ts="2019-06-11T13:21:51+05:30" ver="2.0"/>
  <Resp reqMsgId="1GRDpegAQsFrxHwxghBu" result="SUCCESS"/>
```

```
<Txn custRef="124921100002" id="UPI0942748834dk0GUANtBpLYqGjL"
 initiationMode="33|34|35" note="UPI" purpose="83"
 refId="12345"
 refUrl="https://www.sbi.co.in" ts="2019-06-11T13:21:50+05:30" type="PAY">
 <RiskScores>
  <Score provider="psp2" type="TXNRISK" value="00030"/>
  <Score provider="NPCI" type="TXNRISK" value="00030"/>
 </RiskScores>
</Txn>
<Payer addr="bhalkubham@mypsp" code="0000"
 name="Bhalku Bham" seqNum="1" type="PERSON">
 <Info>
  <Identity id="" type="ACCOUNT" verifiedName=""/>
  <Rating verifiedAddress="TRUE"/>
 </Info>
 <Ac addrType="ACCOUNT">
  <Detail name="IFSC" value="AABY0036037"/>
  <Detail name="ACTYPE" value="SAVINGS"/>
  <Detail name="ACNUM" value="117795514570" />
 </Ac>
 <Amount curr="INR" value="1000.00"/>
</Payer>
<Payees>
 <Payee addr="merchant@acqpsp@icici" code="5411"
  name="" seqNum="1" type="ENTITY">
  <Info>
   <Identity id="" type="ACCOUNT" verifiedName=""/>
   <Rating verifiedAddress="TRUE"/>
  </Info>
  <Ac addrType="ACCOUNT">
   <Detail name="IFSC" value="AAZY0036033"/>
   <Detail name="ACTYPE" value="CURRENT"/>
   <Detail name="ACNUM" value="136035514570" />
  </Ac>
```

```
 <Amount curr="INR" value="1000.00"/>
   <Merchant>
     <Identifier merchantType="SMALL" mid="5411" sid="ABC123"
      subCode="5411" tid="ABC1234"/>
     <Name brand="Test" franchise="Test" legal="Test"/>
     <Ownership type="OTHERS"/>
    </Merchant>
  </Payee>
 </Payees>
</upi:RespAuthDetails>
```


3.5.4 Internal call by UPI to Auth Engine

Post Address resolution and FRM leg, UPI shall forward the request to Auth Engine for ARQC validation and DEBIT. In response UPI shall get the ARPC.

3.5.5 ReqPay UPI to Remitter bank (DEBIT)


```
<ns2:ReqPay xmlns:ns2="http://npci.org/upi/schema/" xmlns:ns3="http://npci.org/cm/schema/">
  <Head ver="2.0" ts="2021-09-06T21:08:59+05:30" orgId="NPCI"
msgId="1vRRpw1b9vnj3kBDFV2N" />
  <Meta/>
  <Txn id="UPI0942748834dk0GUANtBpLYqGjL" note="Lite PAY" refId="12345"
refUrl="http://www.google.co.in/" ts="2021-09-06T21:09:08.833+05:30"
  type="DEBIT" subType="PAY" custRef="124921100002" initiationMode="33|34|35" purpose="83"
>
    <RiskScores>
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Payer addr="bhalkubham@mypsp" name="Bhalku Bham" seqNum="1" code="0000">
  <Device>
      <Tag name="MOBILE" value="919743251692" />
      <Tag name="IP" value="127.0.0.0" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="A8B6003C5F43461C8CA75F1B547728EE" />
```

```
        <Tag name="OS" value="ANDROID" />
        <Tag name="APP" value="com.testbank.mobility.beta" />
        <Tag name="TELECOM" value="BSNL" />
      </Device>
<Ac addrType="ACCOUNT">
        <Detail name="ACNUM" value="117795514570" />
        <Detail name="IFSC" value="AABY0036037" />
        <Detail name="ACTYPE" value="SAVINGS" />
      </Ac>
            <Amount value="1000.00" curr="INR" />
                    </Amount>
            </Payer>
            <Payees>
      <Payee addr="mechant@acqpsp" seqNum="1" code="5411" type="ENTITY">
        <Ac addrType="ACCOUNT">
          <Detail name="ACNUM" value="136035514570" />
          <Detail name="IFSC" value="AAZY0036033" />
          <Detail name="ACTYPE" value="CURRENT" />
        </Ac>
        <Amount value="1000.00" curr="INR" />
                    <Merchant>
       <Identifier merchantType="SMALL" mid="5411" sid="ABC123"
        subCode="5411" tid="ABC1234"/>
       <Name brand="Test" franchise="Test" legal="Test"/>
       <Ownership type="OTHERS"/>
      </Merchant>
        </Payee >
    </Payees>
</ns2:ReqPay>
```


3.5.6 RespPay from Remitter bank to UPI (DEBIT)


```
<ns2:RespPay xmlns:ns2="http://npci.org/upi/schema/">
  <Head msgId="1vRRpw1b9vnj3kBDFVsq" orgId="199991"
    ts="2019-06-11T13:21:40+05:30" ver="2.0"/>
```

```
<Txn custRef="124921100002" id="UPI0942748834dk0GUANtBpLYqGjL"
 initiationMode="33|34|35" note="UPI" purpose="83"  refId="12345"
 refUrl="http://www.google.co.in/" subType="PAY"
 ts="2019-06-11T13:21:40+05:30" type="DEBIT">
 <RiskScores>
  <Score provider="NPCI" type="TXNRISK" value="00030"/>
 </RiskScores>
</Txn>
<Resp reqMsgId="1vRRpw1b9vnj3kBDFV2N" result="SUCCESS">
 <Ref IFSC="AAZY0036033" acNum="136035514570" accType="CURRENT"
  addr="mechant@acqpsp" approvalNum="307983" code="0000"
  regName="User test" respCode="00" seqNum="1"
  settAmount="1000.00" settCurrency="INR" type="PAYEE"/>
</Resp>
</ns2:RespPay>
```


3.5.7 ReqPay to Beneficiary bank (CREDIT)


```
<ns2:ReqPay xmlns:ns2="http://npci.org/upi/schema/" xmlns:ns3="http://npci.org/cm/schema/">
 <Head ver="2.0" ts="2021-09-06T21:08:59+05:30" orgId="NPCI"
msgId="1vRRpw1b9vnj3kBDFV2N" />
 <Meta/>
 <Txn id="UPI0942748834dk0GUANtBpLYqGjL" note="Lite PAY" refId="12345"
refUrl="http://www.google.co.in/" ts="2021-09-06T21:09:08.833+05:30"
 type="CREDIT" subType="PAY" custRef="124921100002" initiationMode="33|34|35"
purpose="83" >
   <RiskScores>
     <Score provider="NPCI" type="TXNRISK" value="00999" />
   </RiskScores>
 </Txn>
 <Payer addr="shubham@mypsp" name="Shubh Bham" seqNum="1" code="0000">
 <Device>
     <Tag name="MOBILE" value="919743251692" />
     <Tag name="IP" value="127.0.0.0" />
     <Tag name="TYPE" value="MOB" />
```

```
      <Tag name="ID" value="A8B6003C5F43461C8CA75F1B547728EE" />
      <Tag name="OS" value="ANDROID" />
      <Tag name="APP" value="com.testbank.mobility.beta" />
      <Tag name="TELECOM" value="BSNL" />
    </Device>
<Ac addrType="ACCOUNT">
      <Detail name="ACNUM" value="117795514570" />
      <Detail name="IFSC" value="AABY0036037" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
          <Amount value="1000.00" curr="INR" />
                </Amount>
          </Payer>
          <Payees>
    <Payee addr="mechant@acqpsp" seqNum="1" code="5411" type="ENTITY">
      <Ac addrType="ACCOUNT">
        <Detail name="ACNUM" value="136035514570" />
        <Detail name="IFSC" value="AAZY0036033" />
        <Detail name="ACTYPE" value="CURRENT" />
      </Ac>
      <Amount value="1000.00" curr="INR" />
                <Merchant>
     <Identifier merchantType="SMALL" mid="5411" sid="ABC123"
      subCode="5411" tid="ABC1234"/>
     <Name brand="Test" franchise="Test" legal="Test"/>
     <Ownership type="OTHERS"/>
    </Merchant>
      </Payee >
  </Payees>
</ns2:ReqPay>
```


3.5.8 RespPay from beneficiary bank to UPI (CREDIT)


```
<ns2:RespPay xmlns:ns2="http://npci.org/upi/schema/">
  <Head msgId="1vRRpw1b9vnj3kBDFVsq" orgId="199991"
```

```
  ts="2019-06-11T13:21:40+05:30" ver="2.0"/>
 <Txn custRef="124921100002" id="UPI0942748834dk0GUANtBpLYqGjL"
  initiationMode="33|34|35" note="UPI" purpose="83"
  refId="12345"
  refUrl="http://www.google.co.in/" subType="PAY"
  ts="2019-06-11T13:21:40+05:30" type="CREDIT">
  <RiskScores>
   <Score provider="NPCI" type="TXNRISK" value="00030"/>
  </RiskScores>
 </Txn>
 <Resp reqMsgId="1vRRpw1b9vnj3kBDFV2N" result="SUCCESS">
  <Ref IFSC="AAZY0036033" acNum="136035514570" accType="CURRENT"
   addr="mechant@acqpsp" approvalNum="307983" code="0000"
   regName="User test" respCode="00" seqNum="1"
   settAmount="1000.00" settCurrency="INR" type="PAYEE"/>
 </Resp>
</ns2:RespPay>
```


3.5.9 Final RespPay from UPI to Payer PSPe


```
<ns2:RespPay xmlns:ns2="http://npci.org/upi/schema/" xmlns:ns3="http://npci.org/cm/schema/">
<Head ver="2.0" ts="2019-06-11T13:21:52+05:30" orgId="NPCI"
msgId="1GRDpegAQsFrxHwIg7o5"/>
<Txn id="UPI0942748834dk0GUANtBpLYqGjL" note="UPI" refId="12345"
refUrl="https://www.google.co.in" ts="2019-06-11T13:21:50+05:30" type="PAY"
custRef="124921100002" initiationMode="00" purpose="83" >
<RiskScores><Score provider="NPCI" type="TXNRISK" value="00030"/></RiskScores></Txn><Resp
reqMsgId="c87924e5b9c4137806c2e68f0593c66"
result="SUCCESS"><Ref type="PAYER" seqNum="1" addr="bhalkubham@mypsp"
settAmount="1000.00" settCurrency="INR" approvalNum="307983"
 respCode="00" regName="" orgAmount="1000.00" acNum="117795514570" IFSC="AABY0036037"
code="0000" accType="SAVINGS">
        <Creds>
         <Cred type="ARPC">
```

<Data>eyJlbmMiOiJBMTI4Q0JDLUhTMjU2IiwiYWxnIjoiUlNBLU9BRVAtMjU2In0.bSCe9waI2pQXiJhS0y
zMhCy_IUX2MsQFAa7VDi4mvNYv5mFN7HCIXQQrUB69QMdhvsDl4rFB1DrbALXzu-
E92TiIYuOsqPohfD5TewQ4UtTPALEqu-
2kPNEmsExAgcS91exJW0WFaB8aYG7ThYRx43zSYFQpAo1SHH9hqHh9w0wKOvfbo17rFl2Sidv-
my094xbva8EDp_MgVXTUOqg93kCAT60wJg7HRAmfEDyUnF55SrV_TLIW4giANhb4Nk7q2rp7weL9Ny
YyZS9QrpumLbh5r-
9PlIr7T_GuQPw9o1qkPWvlyNJOwWU3XXSmwU0iQtm_tmgGutXRUvKmG2NK3g.kjqaSSKHb8s96O8X
6wQVaQ.8oMAPC5A9UXF2mJBmzKGSoqNEYQOJQTR_V66EG5jxNWpywrKgoyEHcApnv1x7PJocYfa87
HBjjzSmgJBVcqYbd82l_5zGYxbz-
f4wRJMKaw8HJ6uzXgDDp013p9pThY565F4f7j2bClUBB6h3HnTGqJcrY9hey21SHhiZbbElFzigmOiGvx0y
2t2E4P8Do9HRJxdGVRFlV-MjvbPYMiOnhBFjisrOe5-_0u1ScYwcaB8qg-
sDt4u93WEd3XEOdbOlTi3GiZt5hgJD4VVF34aivCaYOfhU9lCXi3TgKDn4tkG-5V5VaHs9VERGCAj-
BdJPMN57S4EBAj2uuyGC_6AlPnJ1a4GG6j44CSjrb4hh4aOAHaX6KnFQhMsFEqS_muEjd45_c_wX3uU4
3raddHimDmNFwr4kdm-4yTWqWXfeVDCYsfnRimO0re2YqjFnZwtYLLaXOOjFn4WFXf-
Cp_oSOIutaQEIbom2wCfbe6106CpoPaeCjLwJ9iR9B-
liBEbyvyVDQLOJ7f53eIfyjKnkmIIR0Z7ulyHy0OF0taQXu5o7bzVY2-f5Cb_GFYcZW_D6-
qLnX6gxkYgmJbN4QJ0FxUbEJMxCVuuRzt22a3W3u2ZfpefXU_jKx_ySodIuD6m3fORETwbHx3gCyi0g-
rUxG1KnQQ31hNzhx6qNEFrTYAxbH9bmlKyw8kH_Q0f7QppWYo4E8oR2NSAf1MbdItBKHxIqDTo6aTS
e8hoiMRptJ_0xA_mlP4BWQ3uI6DcNpJwodlSQf-
iZC5XrsMisyh6iJqUOmAYXv50u4seB9EPSuTlhUXqbr_x1Uc96l8Ct9N4AXgtNznXCo0Ifv1xK8m6cfLURrx
Aaqo8zkCHE7DQNvF9Qpezf9p9gNt_B4onjnI07fb0XmpTMgHKSJ6N7tJ4q2jZAG9mWTa789qTK_JFZMc
iUlAL0fz6ChjOaqGOIdJsbU6LkZxVdHAh7GJV3nP8cq822DH4iaFqeg_1Bkykv-uzW8Uq9-
9B9xeEKkY4VPDbtsuCM5DucenuV43XzKw7nKCytputcq_GXEzgwlRrqpOyjEuwi-
XoPb3Nx0JTTID5LyrikC-EVbhVWMxlxHXgJsmUaikcg6JmiFF5v4gZ1TaqaudcXP-
ZO0DZCFWG6WJVaeZPR2mmu1fj1WClKYgdbZHCel7YqpyRuDq9wEMuYvRY4hLfi-
UpHJg0gXfrvcUT6Tpz78zOBvdk1I2NR0HjuO33dNOTUpig8a8pG2JYqMxCXZcFKpAFOBntW6noBjwbIPb
67GmQ3Esn40C6U199pFzu2sehE892x33KDHe0rqI.tatCw72eBwEEN59d8nnWIw</Data>
</Cred>
</Creds>
</Ref>
<Ref type="PAYEE" IFSC="AAZY0036033" acNum="136035514570" accType="CURRENT"
addr="mechant@acqpsp" approvalNum="307983" code="0000" regName="User test"
respCode="00" seqNum="1" settAmount="1000.00" settCurrency="INR" />

```
</Resp>
</ns2:RespPay>
```

3.6 Transaction Confirmation

3.6.1 ReqTxnConfirmation

```
<upi:ReqTxnConfirmation xmlns:upi="http://npci.org/upi/schema/">
<Head ver="1.0|2.0" ts="" orgId="" msgId=""/>
<Txn id="" note="" refId="" refUrl="" ts="" type="TxnConfirmation" orgTxnId=""
initiationMode="33|34|35" purpose="" refCategory=""/>
<TxnConfirmation note="" orgStatus="SUCCESS|FAILURE|PENDING" orgErrCode=""
type="" actn="">
<Ref type="PAYER|PAYEE" seqNum="" addr="" regName="" settAmount=""
orgAmount="" settCurrency="" approvalNum="" acNum="" IFSC="" code="" accType=""
respCode="" reversalRespCode=""/>
</TxnConfirmation>
</upi:ReqTxnConfirmation>
```

3.6.2 RespTxnConfirmation

```
<upi:RespTxnConfirmation xmlns:upi="http://npci.org/upi/schema/">
<Head ver="1.0|2.0" ts="" orgId="" msgId=""/>
<Txn id="" custRef="" note="" refId="" refUrl="" ts="" type="TxnConfirmation"
refCategory="00|01|02|03|04|05|06|07|08|09" orgTxnId=""initiationMode="33|34|35"
purpose="00|01|02|03|04|05|06|07|08|09|10|11" />
<Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
</upi:RespTxnConfirmation>
```

3.7 Transaction Confirmation For PSPo

3.7.1 ReqSync API From PSPe to UPI to PSPo: TXNCONF

```
<ns2:ReqSync xmlns:ns2="http://npci.org/upi/schema/" xmlns:ns3="http://npci.org/cm/schema/">
```

<Head ver="2.0" ts="2019-06-11T13:21:52+05:30" orgId="NPCI"

msgId="1GRDpegAQsFrxHwIg7o5"/>

<Txn id="UPI0942748834dk0GUANtBpLYqGjL" note="UPI" refId="12345"

refUrl="https://www.google.co.in" ts="2019-06-11T13:21:50+05:30" type=" TXNCONF "

custRef="124921100002" initiationMode=""33|34|35"" purpose="83" orgTxnId=" "/>

<Ref type="PAYER" seqNum="1" addr="bhalkubham@mypsp" settAmount="1000.00" settCurrency="INR" approvalNum="307983"

respCode="00" regName="" orgAmount="1000.00" acNum="117795514570" IFSC="AABY0036037" code="0000" accType="SAVINGS"/>

<Ref type="PAYEE" IFSC="AAZY0036033" acNum="136035514570" accType="CURRENT" addr="mechant@acqpsp" approvalNum="307983" code="0000" regName="User test"

respCode="00" seqNum="1" settAmount="1000.00" settCurrency="INR" />

</ns2:ReqSync>

3.7.2 RespSync API From PSPo to UPI to PSPe: TXNCONF

<upi:RespSync xmlns:upi="http://npci.org/upi/schema/">

<Head ver="2.0" ts="" orgId="" msgId=""/>
<Txn id="" note="" refId="" refUrl="" ts="" startTime="" validityPeriod="" type=" TXNCONF" orgTxnId="" , initiationMode="33|34|35" purpose="83" />

<Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="">

<Ref type="PAYEE" IFSC="AAZY0036033" acNum="136035514570" accType="CURRENT"

addr="mechant@acqpsp" approvalNum="307983" code="0000" regName="User test"

respCode="00" seqNum="1" settAmount="1000.00" settCurrency="INR" />

<Ref type="PAYER" seqNum="1" addr="bhalkubham@mypsp" settAmount="1000.00" settCurrency="INR" approvalNum="307983" respCode="00" regName="" orgAmount="1000.00" acNum="117795514570" IFSC="AABY0036037" code="0000" accType="SAVINGS"/>

</Resp>

</upi:RespSync>

4 Tag Specifications for RegED API

4.1 ReqRegED

Tag Num	Message Item	<XMLTag>	Datatype	Length	Mandatory
1.1	API Name	<ReqRegED >			Y
1.1.1	API Schema namespace	xmlns	Alphanumeric	Min Length : 1 Max Length : 255	Y
2.1	**Header for the message**	**<Head>**	**Alphabetic**	**Fixed value**	**Y**
2.1.1	Version of the API	Ver	Numeric	Min Length : 1 Max Length : 6	Y
2.1.2	Time of request from the creator of the message	Ts	ISODatetime	Min Length : 1 Max Length : 255	Y
2.1.3	Organization id that created the message	orgId	Numeric	Min Length : 6 Max Length : 20	Y
2.1.4	Message identifier- used to correlate between request and response	msgId	Alphanumeric	Length : 35	Y
3.1	**Transaction information, Carried throughout the system, visible to all parties**	**<Txn>**	**Alphabetic**	**Fixed value**	**Y**
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	Alphanumeric	Fixed Length : 35	Y
3.1.2	Description of the transaction (which will be printed on Passbook)	note	Alphanumeric	Min Length : 1 Max Length : 50	Y
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	Alphanumeric	Min Length : 1 Max Length : 35	Y

3.1.4	URL for the transaction	refUrl	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.5	Transaction origination time by the creator of the message	ts	ISODateTime	Min Length : 1 Max Length : 255	Y
3.1.6	Defines start time of validity	startTime	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.7	Defines end time of validity	validityPeriod	Alphanumeric	Min Length : 1 Max Length : 35	N
3.1.8	Type of the Transaction, ReqRegED_SETUPIID ReqRegED_SETDEVICE ReqRegED_DISABLE	type	Code	Min Length : 1 Max Length : 20	Y
3.1.9	Original transaction ID when reversal/Refund has to be done	orgTxnId	Alphanumeric	Length : 35	N
3.1.10	Initiation mode	InitiationMode	Code	Min Length : 1 Max Length : 35	Y
3.1.11	Purpose of the txn	purpose	Code	Fixed value	Y
4.1	Details related to the Payer	**<Payer>**	**Alphabetic**	**Fixed value**	**Y**
4.1.1	Address of the Payer	addr	Alphanumeric	Min Length : 1 Max Length : 255	Y
4.1.2	Name of the Payer	name	Alphanumeric	Min Length : 1 Max Length : 99	Y
4.1.3	Unique identifier for each transactio n inside a file including payer and payee	seqNum	Numeric	Min Length : 1 Max Length : 35	Y
4.1.4	Type of the Payer	type	Code	Fixed value	Y
4.15	Merchant Classification Code - MCC	code	Numeric	Length : 4	Y
4.2	Details of device from which the transaction was initiated	<Payer.Device>	Alphabetic	Fixed value	Y
4.2.1	Device Tag	<Payer.Device. Tag>	Alphabetic	Fixed value	Y
4.2.2	Name of the property	name	Code(MOBILE,GEOCODE,LOCATION,IP,TYPE,ID,OS,APP,CA	Fixed value	Y

			PABILITY ,TELECO M		
4.2.3	Value of the property	value	Alphanumeric	Min Length : 1 Max Length : 20	Y
5.1	Only one entity is allowed for a payer	<Payer.Ac>	Alphabetic	Fixed value	Y
5.1.1	Type of the address	addrType	Code	Min Length : 1 Max Length : 20	Y
5.2	Details related to Payer Address	<Payer.Ac.Detail>	Alphabetic	Min Length : 1 Max Length : 255	Y
5.2.1	Name of the property	name	Code	Fixed value	Y
5.2.2	Value of the property	value	Alphanumeric	Min Length : 1 Max Length : 20	Y
5.3	Embedded QR	QR			
5.4	Details of device from which the transaction was initiated	<Payer.Device>	Alphabetic	Fixed value	Y
5.4.1	Device Tag	<Payer.Device. Tag>	Alphabetic	Fixed value	Y
5.4.2	Name of the property	name	Code(MOBILE,GEOCODE,LOCATION,IP,TYPE,ID,OS,APP,CAPABILITY ,TELECO M	Fixed value	Y
5.4.3	Value of the property	value	Alphanumeric	Min Length : 1 Max Length : 20	Y

4.2 RespRegED

Tag Num	Message Item	<XMLTag>	Datatype	Length	Mandatory
1.1	API Name	<RespRegED >			Y
1.1.1	API Schema namespace	xmlns	Alphanumeric	Min Length : 1 Max Length : 255	Y
2.1	Header for the message	<Head>	Alphabetic	Fixed value	Y
2.1.1	Version of the API	Ver	Numeric	Min Length : 1 Max Length : 6	Y

2.1.2	Time of request from the creator of the message	Ts	ISODatetime	Min Length : 1 Max Length : 255	Y
2.1.3	Organization id that created the message	orgId	Numeric	Min Length : 6 Max Length : 20	Y
2.1.4	Message identifier- used to correlate between request and response	msgId	Alphanumeric	Length : 35	Y
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	Alphabetic	Fixed value	Y
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	Alphanumeric	Fixed Length : 35	Y
3.1.2	Description of the transaction(which will be printed on Pass book)	note	Alphanmeric	Min Length : 1 Max Length : 50	Y
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.4	URL for the transaction	refUrl	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.5	Transaction origination time by the creator of the message	ts	ISODateTime	Min Length : 1 Max Length : 255	Y
3.1.6	Defines start time of validity	startTime	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.7	Defines end time of validity	validityPeriod	Alphanumeric	Min Length : 1 Max Length : 35	N
3.1.8	Type of the Transaction, ReqRegED_SETUPIID ReqRegED_SETDEVICE ReqRegED_DISABLE	type	Code	Min Length : 1 Max Length : 20	Y
3.1.9	Original transaction ID when reversal/Refund has to be done	orgTxnId	Alphanumeric	Length : 35	N
3.1.10	App ID	appID	Alphanumeric		

3.1.11	Initiation mode	InitiationMode	Code	Min Length : 1 Max Length : 35	Y
3.1.12	Purpose of the txn	purpose	Code	Fixed value	Y
3.1.13	Device Type	deviceType	Alphanumeric		Y
4.1	Response	<Resp>	Alphabetic	Fixed value	Y
4.1.1	Request Message identifier	reqMsgId	Alphanumeric	Length: 35	Y
4.1.2	Result of the transaction	result	Code	Min Length : 1 Max Length : 20	Y
4.1.3	Error code if failed	errCode	Alphanumeric	Min Length : 1 Max Length : 20	Y
5.1	Response Reference	<Ref>	Alphabetic	Fixed value	Y
5.1.1	Reference type	type	Code	Fixed value	Y
5.1.2	Sequence Number	seqNum	Numeric	Min Length : 1 Max Length : 3	Y
5.1.3	Payment address	addr	Alphanumeric	Min Length : 1 Max Length : 255	Y
5.1.4	Approval Reference Number	approvalNu m	Alphanumeric	Length: 6	Y
5.1.5	Response code	respCode	Alphanumeric	Min Length : 1 Max Length : 20	Y
5.1.6	Registered name with bank	regName	Alphanumeric	Min Length : 1 Max Length : 99	Y
5.1.7	Reversal Response Code	reversalRespCode	Alphanumeric	Min Length : 1 Max Length : 20	Y
5.1.8	Account number	acNum	Alphanumeric	Min Length : 1 Max Length : 30	Y
5.1.9	Merchant Classification Code - MCC	code	Numeric	Length: 4	Y

4.3 ReqLimitMgt

Tag Num	Message Item	<XMLTag>	Datatype	Length	Mandatory
1.1	API Name	<ReqLimitMgt >			Y
1.1.1	API Schema namespace	xmlns	Alphanumeric	Min Length : 1 Max Length : 255	Y

2.1	**Header for the message**	**<Head>**	**Alphabetic**	**Fixed value**	**Y**
2.1.1	Version of the API	Ver	Numeric	Min Length : 1 Max Length : 6	Y
2.1.2	Time of request from the creator of the message	Ts	ISODatetime	Min Length : 1 Max Length : 255	Y
2.1.3	Organization id that created the message	orgId	Numeric	Min Length : 6 Max Length : 20	Y
2.1.4	Message identifier- used to correlate between request and response	msgId	Alphanumeric	Length : 35	Y
3.1	**Transaction information, Carried throughout the system, visible to all parties**	**<Txn>**	**Alphabetic**	**Fixed value**	**Y**
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	Alphanumeric	Fixed Length : 35	Y
3.1.2	Description of the transaction (which will be printed on Passbook)	note	Alphanumeric	Min Length : 1 Max Length : 50	Y
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.4	URL for the transaction	refUrl	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.5	Transaction origination time by the creator of the message	ts	ISODateTime	Min Length : 1 Max Length : 255	Y
3.1.6	Type of the Transaction, ReqLimitMgt_DISPLAY LIMIT ReqLimitMgt_SETLIMIT	type	Code	Min Length : 1 Max Length : 20	Y
3.1.7	Original transaction ID when reversal/Refund has to be done	orgTxnId	Alphanumeric	Length : 35	Y
3.1.8	Initiation mode	InitiationMode	Code	Min Length : 1 Max Length : 35	Y
3.1.9	Purpose of the txn	purpose	Code	Fixed value	Y

4.1	Rules that govern the payment	<Txn.Rules>	Alphabetic	Fixed value	N
4.1.1	Rule for the transaction	<Txn.Rules.Rule>	Alphabe tic	Fixed value	N
4.1.2	Name of the property	name	Code	Min Length : 1 Max Length : 20	Y
4.1.3	Value of the property	value	Alphanumeric	Min Length : 1 Max Length : 255	Y
5.1	Details of device from which the transaction was initiated	<Payer.Device>	Alphabetic	Fixed value	Y
5.1.1	Device Tag	<Payer.Device. Tag>	Alphabetic	Fixed value	Y
5.1.2	Name of the property	name	Code(MOBILE,GEOCODE,LOCATION,IP,TYPE,ID,OS,APP,CAPABILITY,TELECO M	Fixed value	Y
5.1.3	Value of the property	value	Alphanumeric	Min Length : 1 Max Length : 20	Y
6.1	Only one entity is allowed for a payer	<Payer.Ac>	Alphabetic	Fixed value	Y
6.1.1	Type of the address	addrType	Code	Min Length : 1 Max Length : 20	Y
6.2	Details related to Payer Address	<Payer.Ac.Detail>	Alphabetic	Min Length : 1 Max Length : 255	Y
6.2.1	Name of the property	name	Code	Fixed value	Y
6.2.2	Value of the property	value	Alphanumeric	Min Length : 1 Max Length : 20	Y

4.4 RespLimitMgt

Tag Num	Message Item	<XMLTag>	Datatype	Length	Mandatory
1.1	API Name	<RespLimitMgt >			Y
1.1.1	API Schema namespace	xmlns	Alphanumeric	Min Length : 1 Max Length : 255	Y

2.1	Header for the message	<Head>	Alphabetic	Fixed value	Y
2.1.1	Version of the API	Ver	Numeric	Min Length : 1 Max Length : 6	Y
2.1.2	Time of request from the creator of the message	Ts	ISODatetime	Min Length : 1 Max Length : 255	Y
2.1.3	Organization id that created the message	orgId	Numeric	Min Length : 6 Max Length : 20	Y
2.1.4	Message identifier- used to correlate between request and response	msgId	Alphanumeric	Length : 35	Y
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	Alphabetic	Fixed value	Y
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	Alphanumeric	Fixed Length : 35	Y
3.1.2	Description of the transaction(which will be printed on Pass book)	note	Alphanmeric	Min Length : 1 Max Length : 50	Y
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.4	URL for the transaction	refUrl	Alphanumeric	Min Length : 1 Max Length : 35	Y
3.1.5	Transaction origination time by the creator of the message	ts	ISODateTime	Min Length : 1 Max Length : 255	Y
3.1.6	Type of the Transaction, Type of the Transaction, ReqLimitMgt_DISPLAYLIMIT ReqLimitMgt_SETLIMIT	type	Code	Min Length : 1 Max Length : 20	Y
3.1.7	Original transaction ID when reversal/Refund has to be done	orgTxnId	Alphanumeric	Length : 35	Y

3.1.8	App ID	appID	Alphanumeric		
3.1.9	Initiation mode	InitiationMode	Code	Min Length : 1 Max Length : 35	Y
3.1.10	Purpose of the txn	purpose	Code	Fixed value	Y
4.1	Response	<Resp>	Alphabetic	Fixed value	Y
4.1.1	Request Message identifier	reqMsgId	Alphanumeric	Length: 35	Y
4.1.2	Result of the transaction	result	Code	Min Length : 1 Max Length : 20	Y
4.1.3	Error code if failed	errCode	Alphanumeric	Min Length : 1 Max Length : 20	Y
5.1	Response Reference	<Ref>	Alphabetic	Fixed value	Y
5.1.1	Reference type	type	Code	Fixed value	Y
5.1.2	Sequence Number	seqNum	Numeric	Min Length : 1 Max Length : 3	Y
5.1.3	Payment address	addr	Alphanumeric	Min Length : 1 Max Length : 255	Y
5.1.4	Approval Reference Number	approvalNu m	Alphanumeric	Length: 6	Y
5.1.5	Response code	respCode	Alphanumeric	Min Length : 1 Max Length : 20	Y
5.1.6	Registered name with bank	regName	Alphanumeric	Min Length : 1 Max Length : 99	Y
5.1.7	Reversal Response Code	reversalRespCode	Alphanumeric	Min Length : 1 Max Length : 20	Y
5.1.8	Account number	acNum	Alphanumeric	Min Length : 1 Max Length : 30	Y
5.1.9	Merchant Classification Code - MCC	code	Numeric	Length: 4	Y
5.1.10	IFSC code	IFSC	Alphanumeric	Length: 11	Y
5.1.11	Account type	ACTYPE	Code	Fixed Value	Y