



Assignmnet:6

Problem Statement: Upload a static website on S3.

1. Sign up for an AWS account, search for 'S3' then click on it.

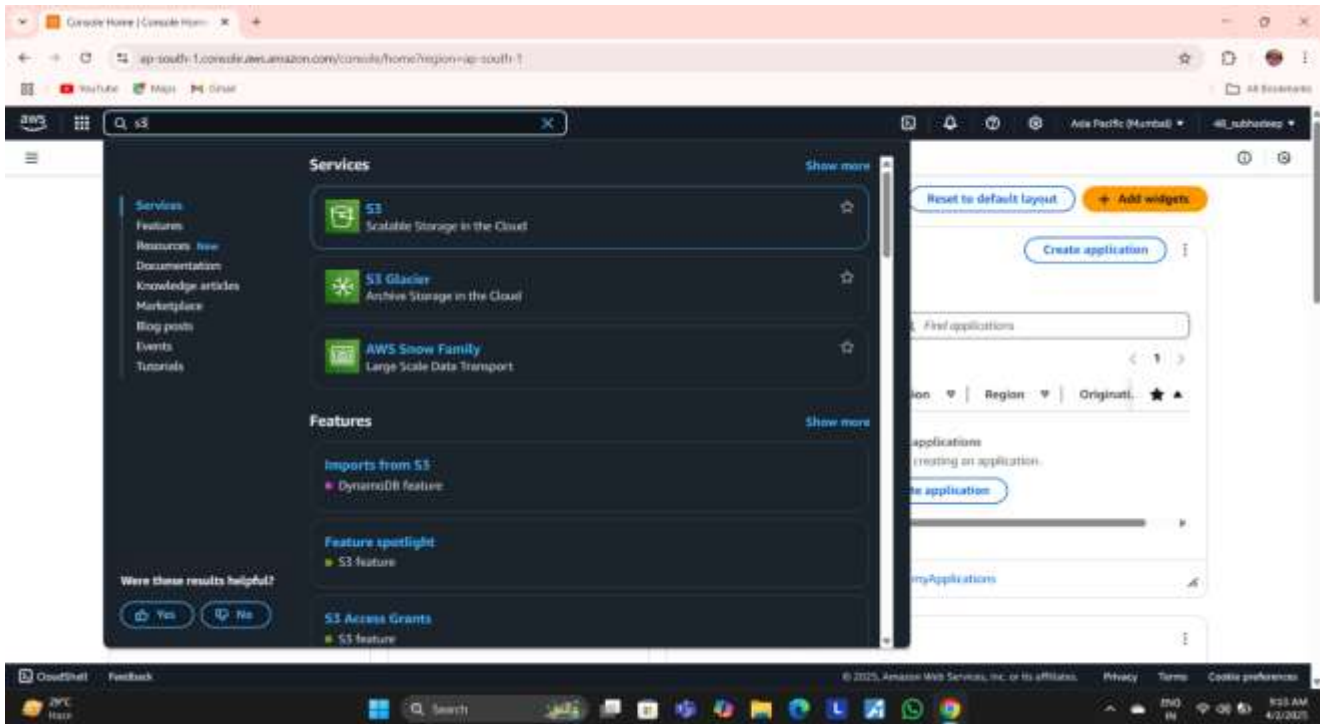

2. Click on 'Create bucket'.

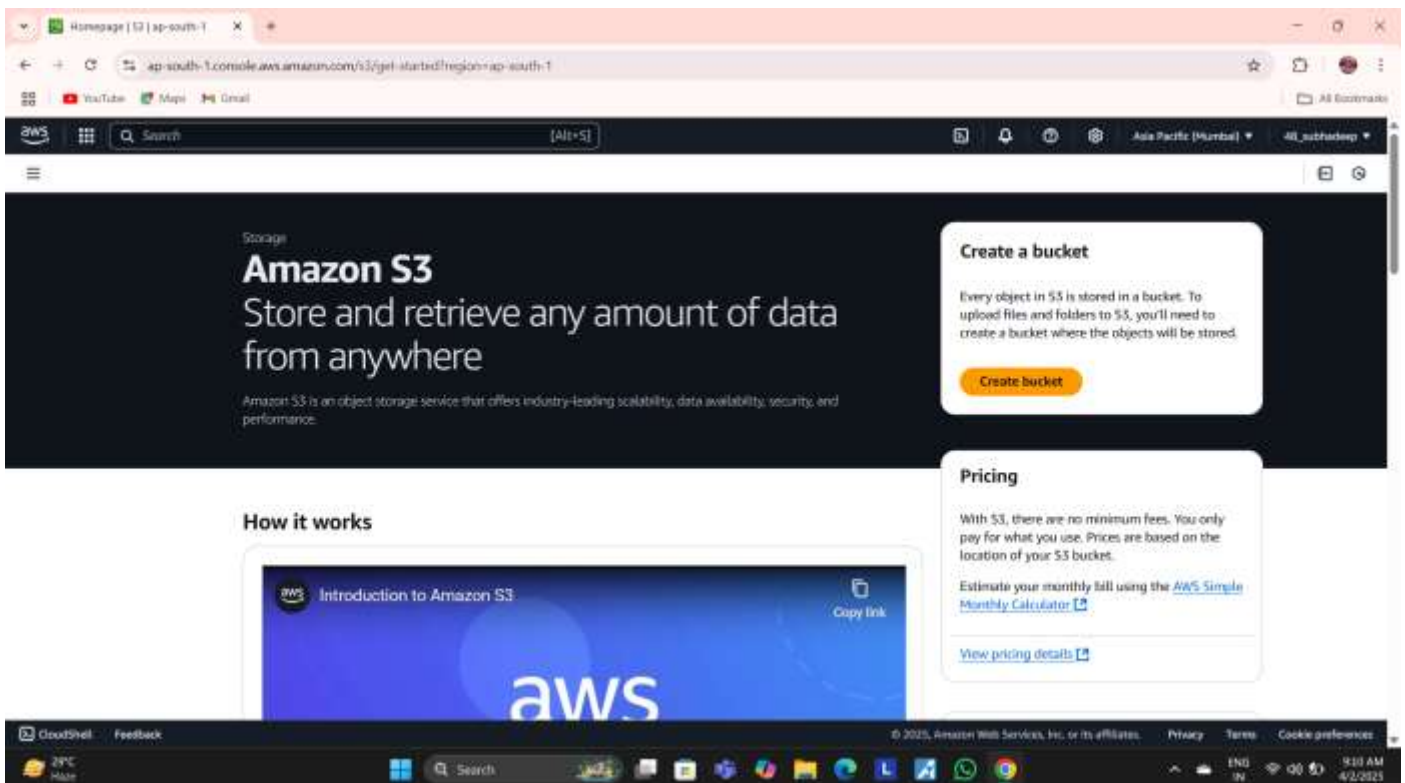

3. Fill up the required details: 'Aws Region', 'Bucket name'. Click on 'ACLs enabled', uncheck 'Block all public access', tick 'I acknowledge...' and then click on 'Create bucket'.

Create S3 bucket | S3 | ap-south-1

ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1&bucketType=general

Amazon S3 > Buckets > Create bucket

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type [info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Designed for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [info](#)

mybucket06

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and to objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and to objects can be specified using ACLs.

We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

23°C Pune

Search

9:12 AM 4/12/2025

Create S3 bucket | S3 | ap-south-1

ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1&bucketType=general

Amazon S3 > Buckets > Create bucket

Bucket name [info](#)

mybucket06

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and to objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and to objects can be specified using ACLs.

We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☐ **Object writer**
The object writer controls the object owner.

If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

23°C Pune

Search

9:12 AM 4/12/2025

Create S3 bucket | S3 | ap-south-1

ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1&bucketType=general

Amazon S3 > Buckets > Create bucket

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to the bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

- ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off Block all public access might result in this bucket and the objects within becoming public.
AWS recommends that you turn on Block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ **Disable**


☐ **Enable**

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences


23°C Pune

Search

9:12 AM 4/12/2025

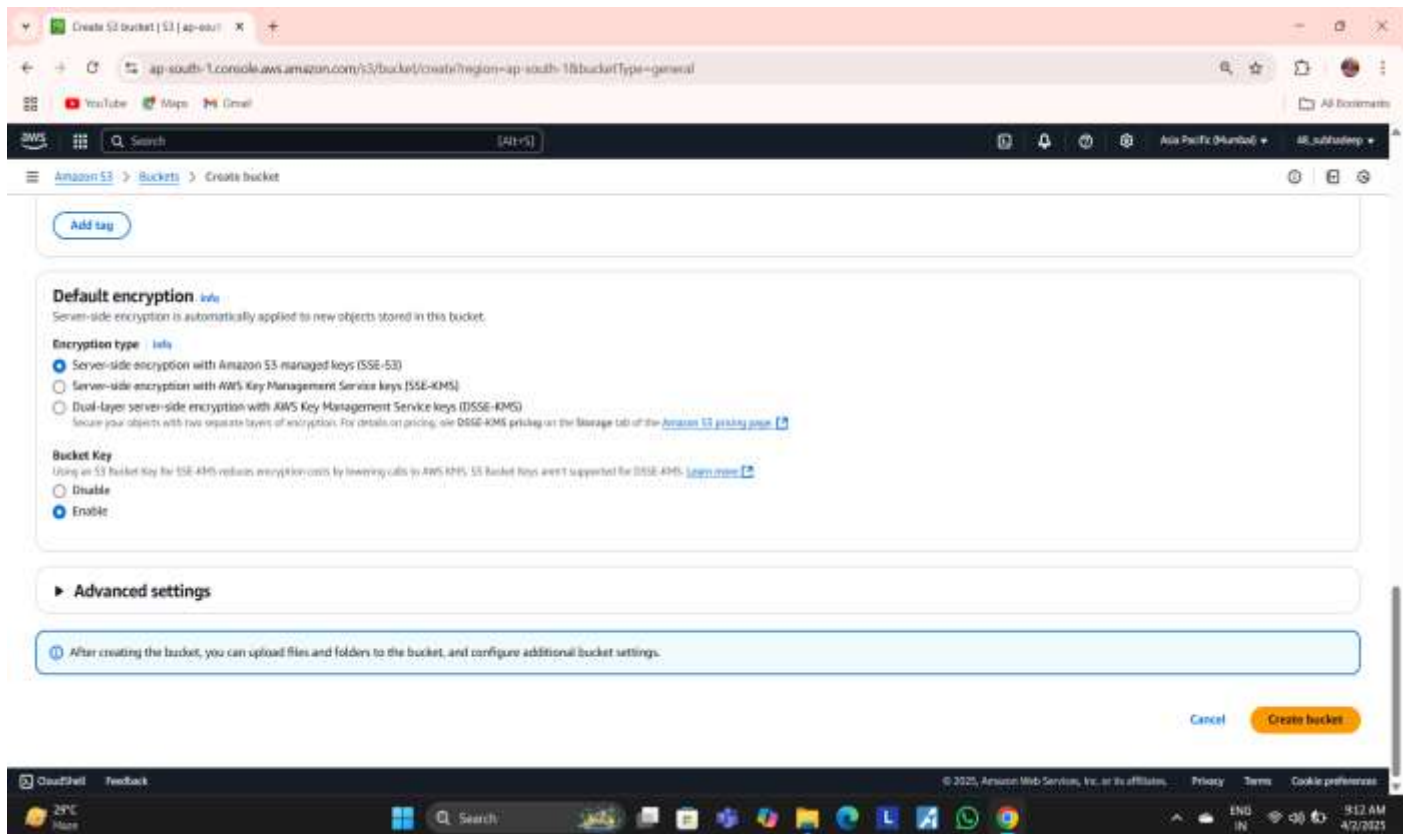

4. The bucket is created successfully. Click on the bucket name.

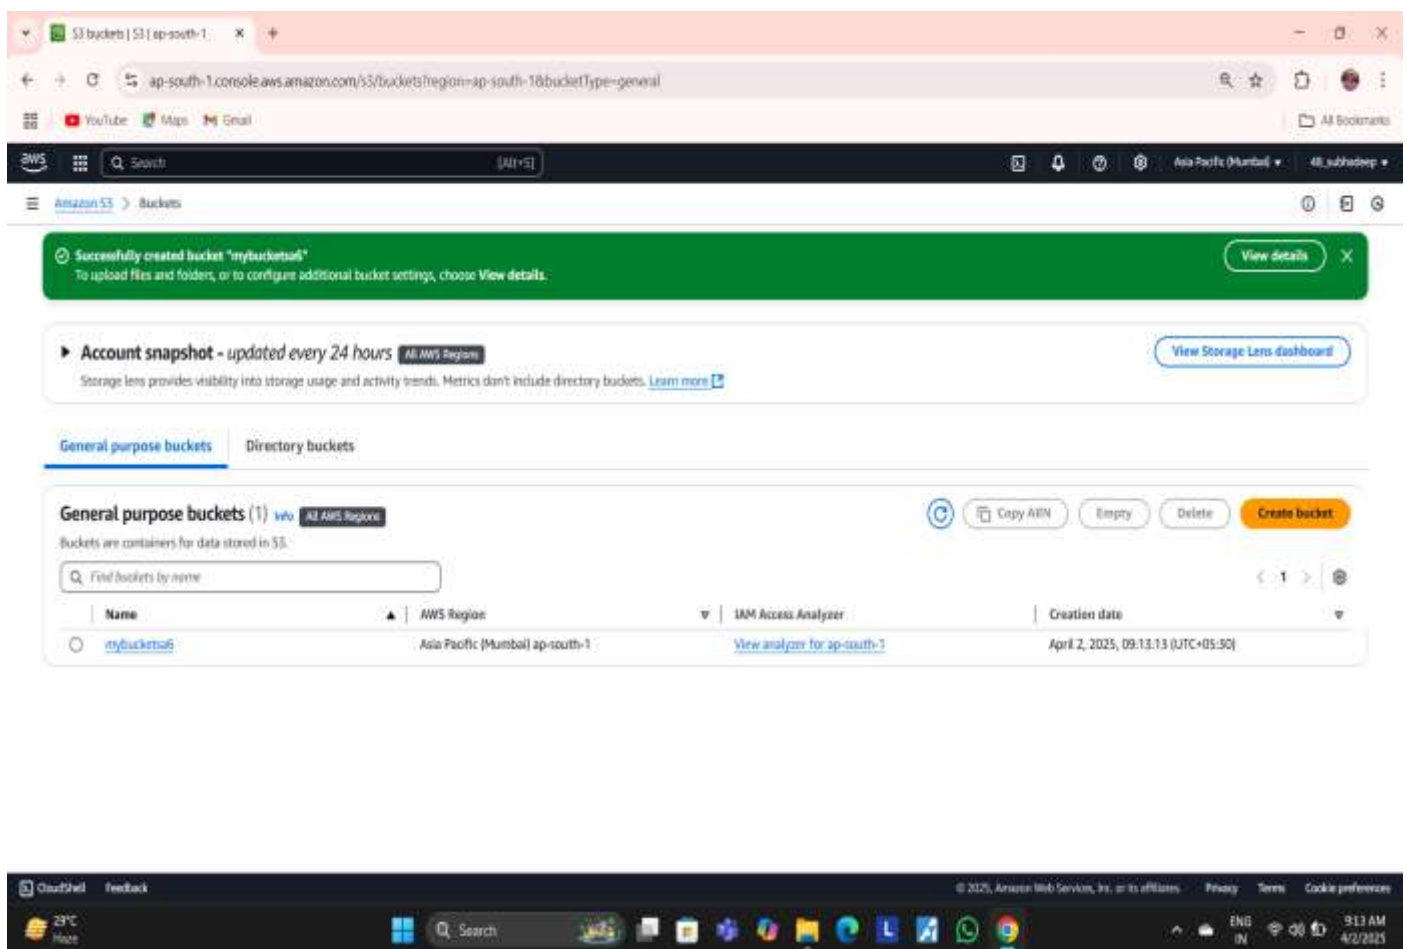

5. Click on 'Upload' then choose the three html files and upload those. Click on 'Add files' and add the three html files.

The first screenshot shows the 'mybucketsa6' bucket in the AWS Management Console. The 'Objects' tab is selected, showing an empty bucket with a message: 'No objects. You don't have any objects in this bucket.' Below this is an 'Upload' button.

The second screenshot shows the 'Upload: status' page after uploading three files. A green banner at the top says 'Upload succeeded'. Below it, a blue box states: 'After you navigate away from this page, the following information is no longer available.' The 'Summary' section shows: 'Destination: s3://mybucketsa6', 'Succeeded: 3 files, 1.3 KB (100.00%)', and 'Failed: 0 files, 0 B (0%)'. The 'Files and folders' section shows a table with 3 items:

Name	Folder	Type	Size	Status	Error
hello.html	-	text/html	426.0 B	Succeeded	-
index.html	-	text/html	434.0 B	Succeeded	-
about.html	-	text/html	422.0 B	Succeeded	-

6. make them as public

Upload objects - S3 bucket my- X Make objects public - S3 buck- X

ap-south-1.console.aws.amazon.com/s3/buckets/mybucket/sf/object/edit_public_read_access?region=ap-south-1&bucketType=general&showversions=false

Amazon S3 > Buckets > mybucket/sf > Make public

Make public [help](#)

The make public action enables public read access in the object access control list (ACL) settings. [Learn more](#)

When public read access is enabled and not blocked by Block Public Access settings, anyone in the world can access the specified objects.

Specified objects

Find objects by name

Name	Type	Last modified	Size
about.html	html	April 2, 2025, 09:14:52 (UTC+05:30)	422.0 B
hello.html	html	April 2, 2025, 09:14:51 (UTC+05:30)	426.0 B
index.html	html	April 2, 2025, 09:14:52 (UTC+05:30)	434.0 B

[Cancel](#) [Make public](#)

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

NZ - PMK Live

ap-south-1.console.aws.amazon.com/s3/buckets/mybucket/sf/object/edit_public_read_access?region=ap-south-1&bucketType=general&showversions=false

Amazon S3 > Buckets > mybucket/sf > Make public

Successfully edited public access. View details below.

Make public: status [Close](#)

After you navigate away from this page, the following information is no longer available.

Summary

Source s3://mybucket/sf	Successfully edited public access 3 objects, 1.3 KB	Failed to edit public access 0 objects
--	--	---


[Failed to edit public access](#) [Configuration](#)

Failed to edit public access (0)


Find objects by name

Name	Folder	Type	Last modified	Size	Error
No objects failed to edit					


7. Viewing the bucket, go to properties and select Static website hosting.

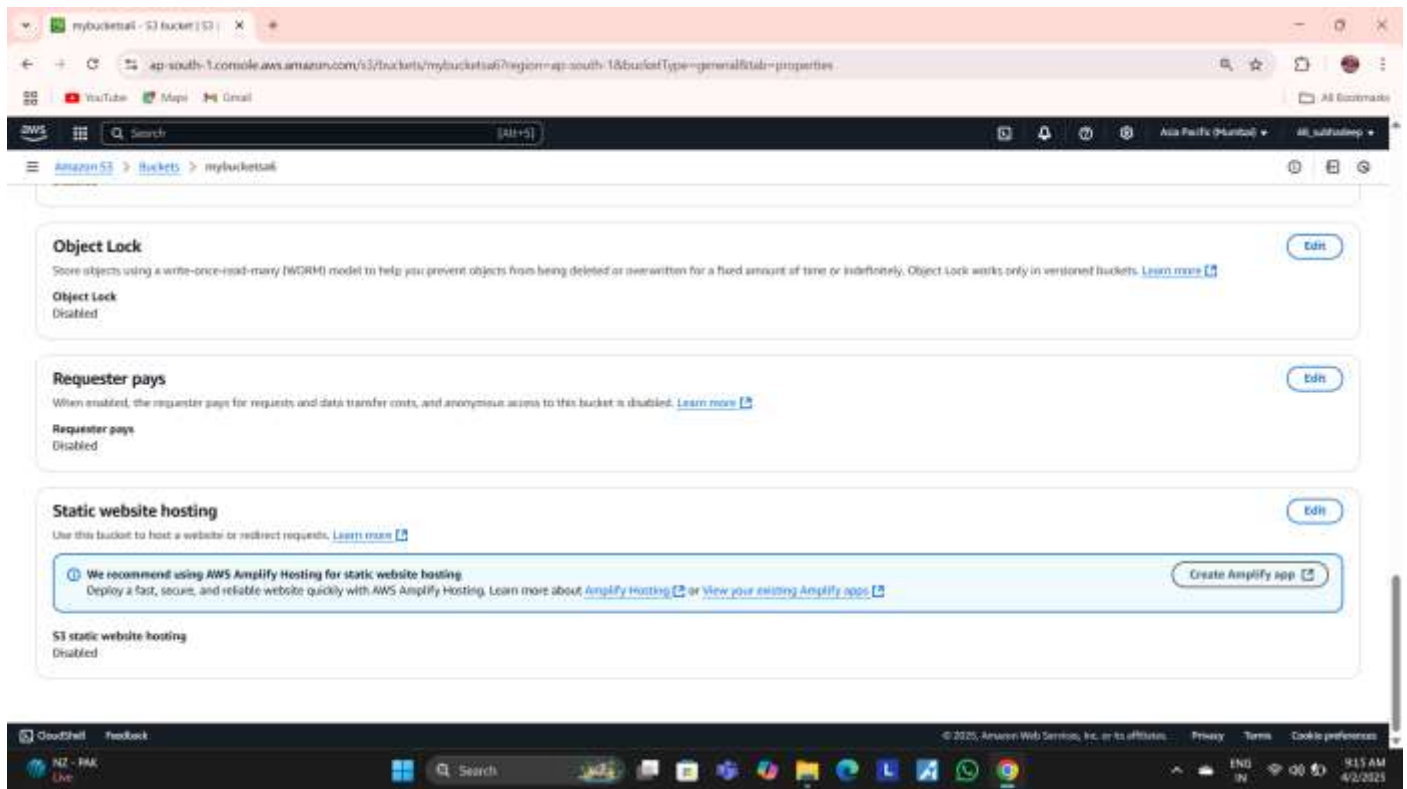


8. Under 'Static website hosting', click on 'Enable', then fill in the name of index document and click on 'Save changes'.

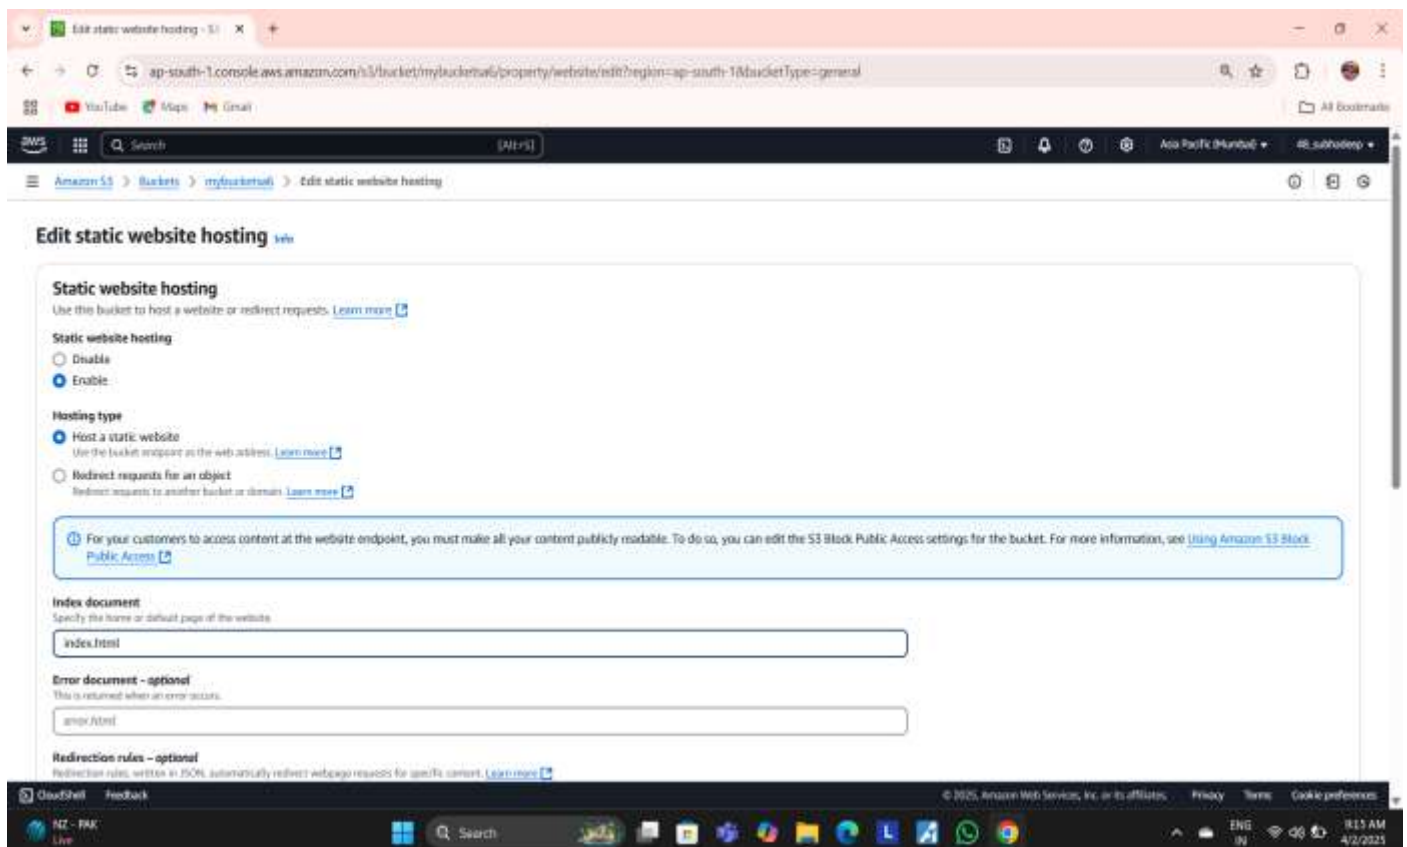

9. The 'Static website hosting' is successfully edited. Now under 'Static website hosting', copy the 'Bucket website endpoint'.

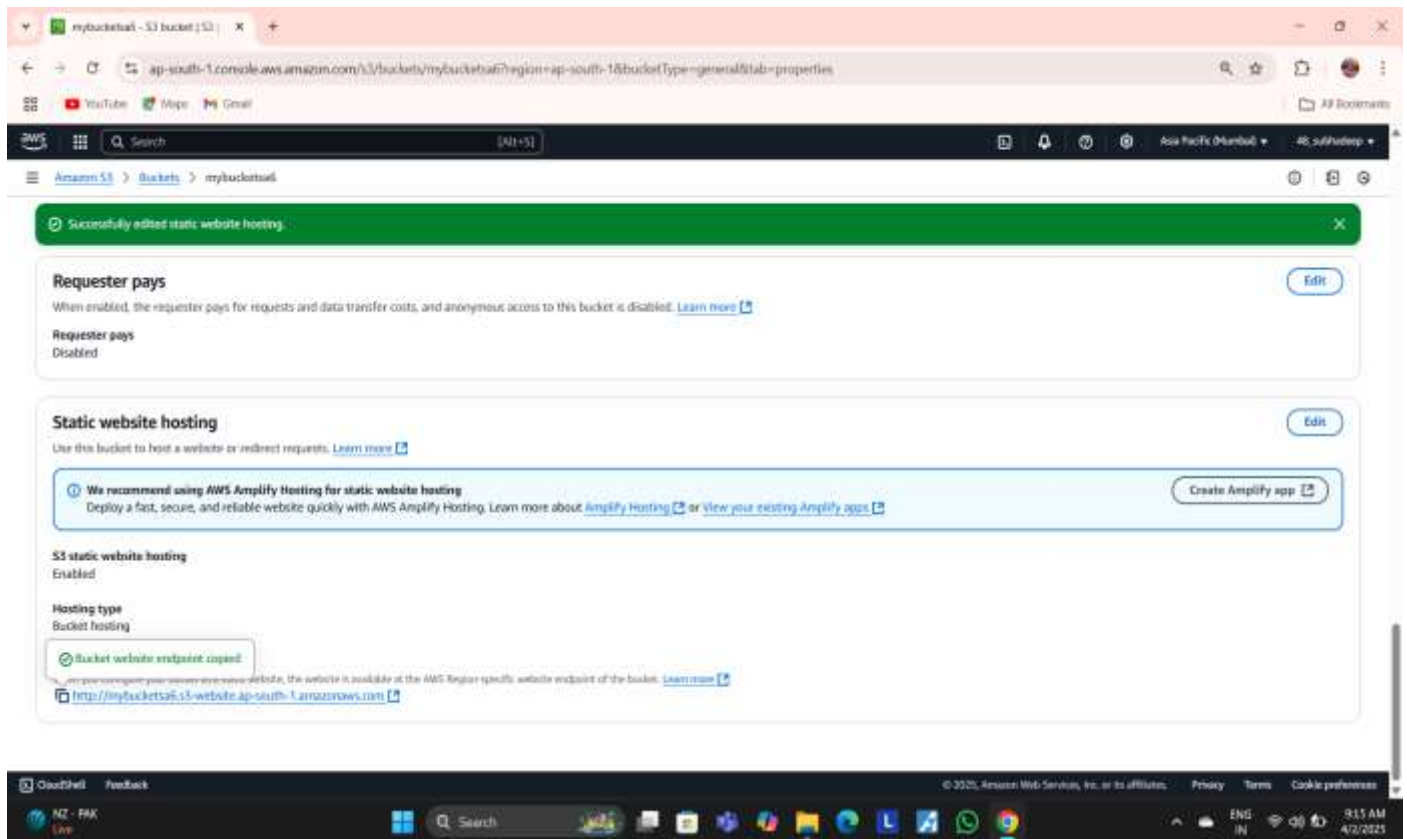

10. Open a new browser and paste the 'Bucket website endpoint' on the address bar. The results are as expected.

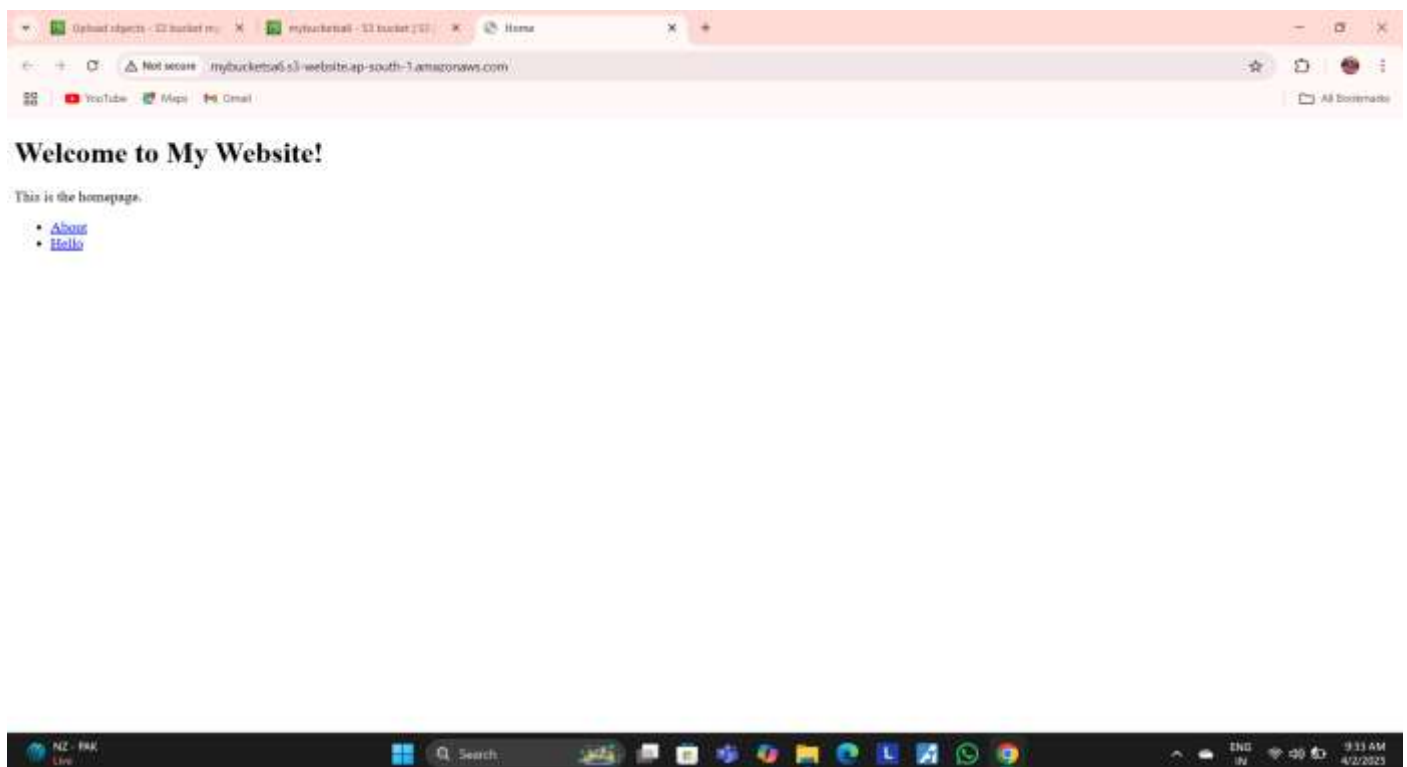



Hello World!

This is the hello page.

- [Home](#)
- [About](#)

mybucketus-east-1.s3-website-us-south-1.amazonaws.com/about.html

