


Assignment-4


Problem Statement: Create a private bucket in AWS. Upload a file and check by presigned URL whether you can access the file or not.

The steps are as follows: -

1. Access the AWS console, search for S3, and select the top option from the search results.

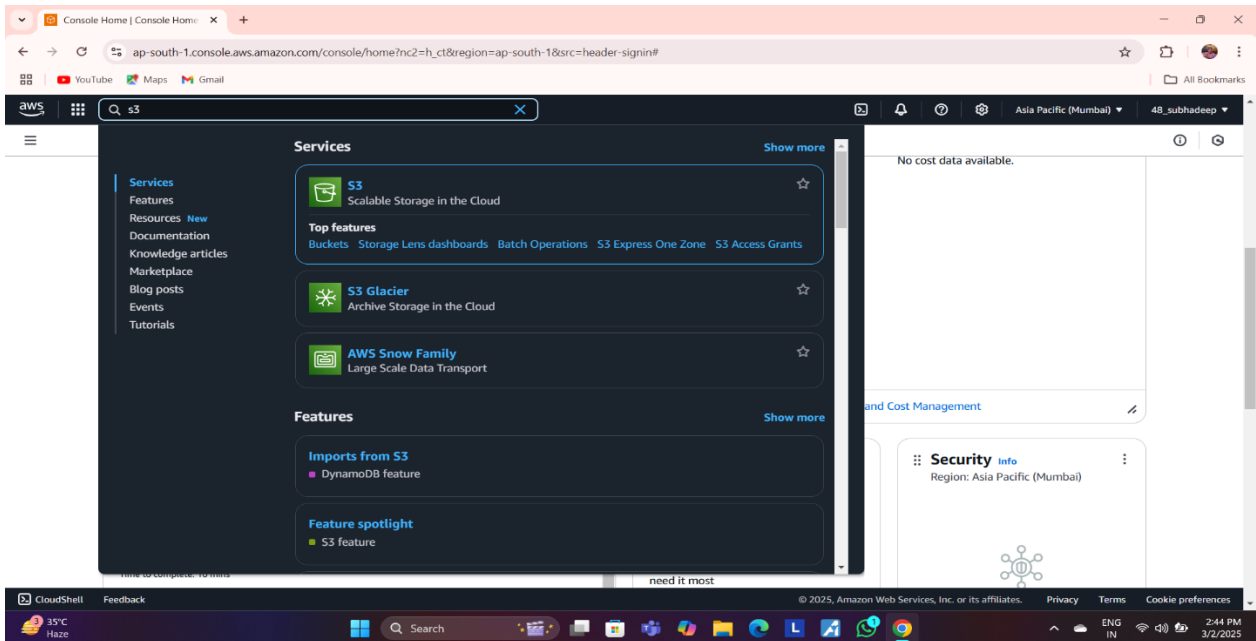



2. Click on 'Create bucket'.

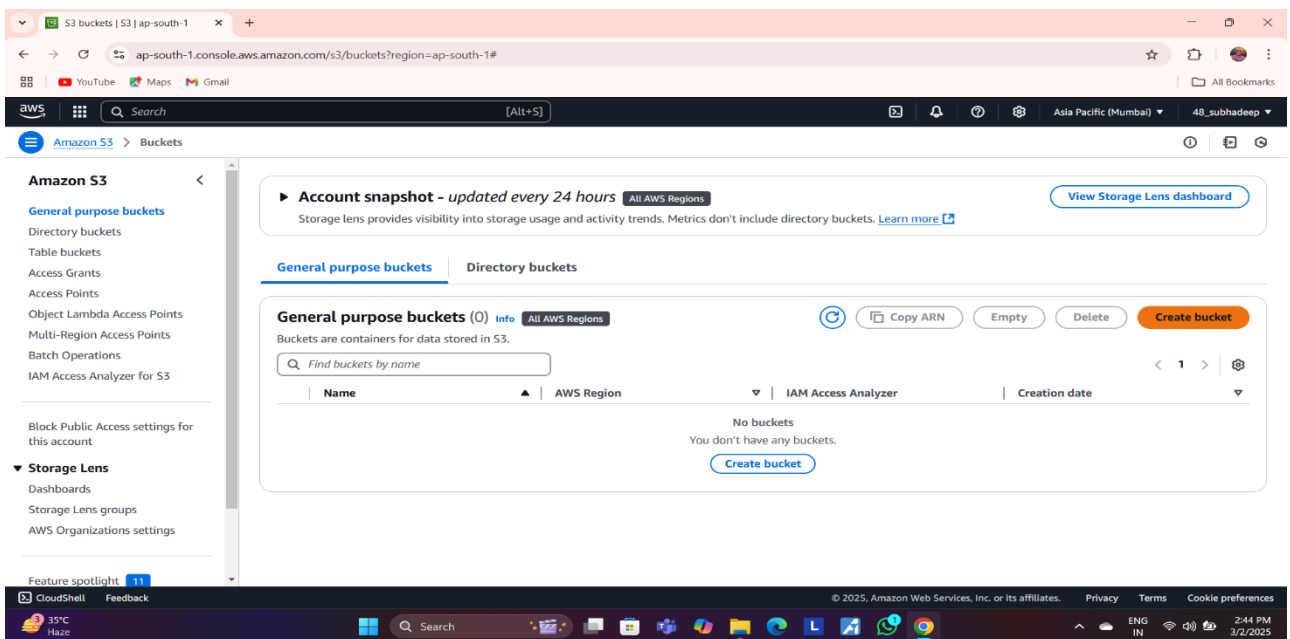


3. The subsequent window appears. By default, the Object Ownership is set to 'ACLs disabled' in this window. We will not make any adjustments as we are creating a private bucket. Similarly, we will leave the settings unchanged as the 'Block all public access' checkbox is already selected by default, aligning with our intention to create a private bucket. select 'Asia Pacific (Mumbai) ap-south-1' as the AWS Region. Next, specify a bucket name, such as '-pvtbucket'.

The screenshot shows the 'Create bucket' page in the AWS console. The browser address bar indicates the URL: `ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1&bucketType=general`. The page title is 'Create bucket' with an 'Info' link. Below the title, it states 'Buckets are containers for data stored in S3.' The 'General configuration' section is active, showing the 'AWS Region' as 'Asia Pacific (Mumbai) ap-south-1'. Under 'Bucket type', 'General purpose' is selected with a radio button, and a description explains it's recommended for most use cases. The 'Directory' option is also visible. The 'Bucket name' field contains 'panbuckets'. A note states 'Bucket name must be unique within the global namespace and follow the bucket naming rules.' Below this, there's a section for 'Copy settings from existing bucket - optional' with a 'Choose bucket' button and a format example: `s3://bucket/prefix`. The 'Object Ownership' section is partially visible at the bottom.


This screenshot shows the 'Object Ownership' and 'Block Public Access settings for this bucket' sections of the 'Create bucket' page. In the 'Object Ownership' section, 'ACLs disabled (recommended)' is selected with a radio button, and a description states 'All objects in this bucket are owned by this account.' The 'Object Ownership' is set to 'Bucket owner enforced'. The 'Block Public Access settings for this bucket' section explains that public access is granted through ACLs, bucket policies, or access point policies. The 'Block all public access' checkbox is checked. Below it, four sub-settings are listed, all of which are checked: 'Block public access to buckets and objects granted through new access control lists (ACLs)', 'Block public access to buckets and objects granted through any access control lists (ACLs)', 'Block public access to buckets and objects granted through new public bucket or access point policies', and 'Block public and cross-account access to buckets and objects through any public bucket or access point policies'.

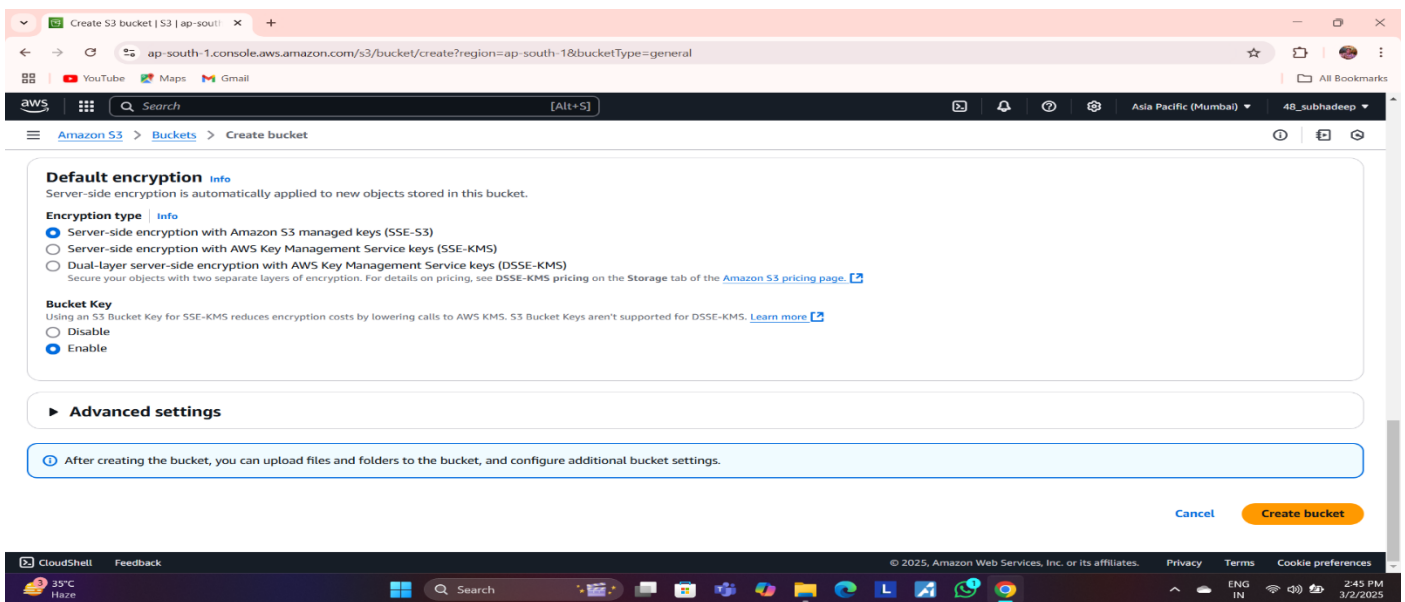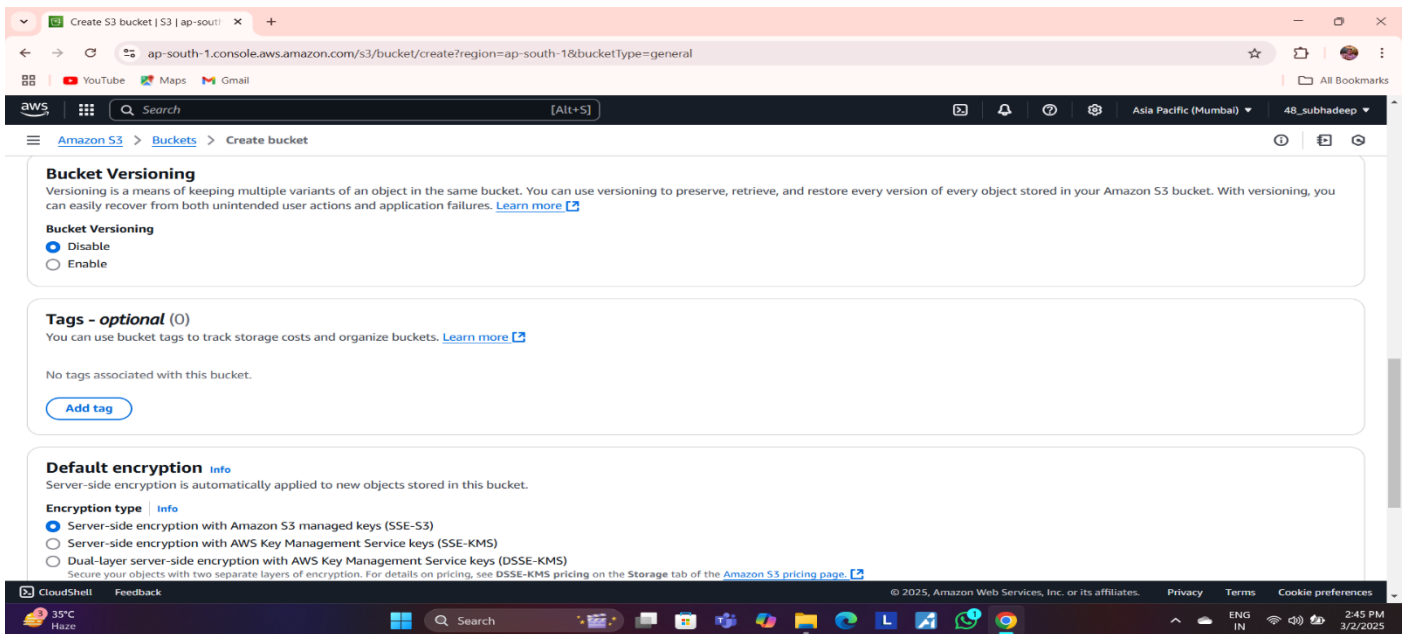


4. Now, without making any additional modifications, scroll down and proceed to click on 'Create Bucket'. A green coloured pop-up dialogue box shall confirm the creation of our bucket. It shall also be displayed on the bucket list.

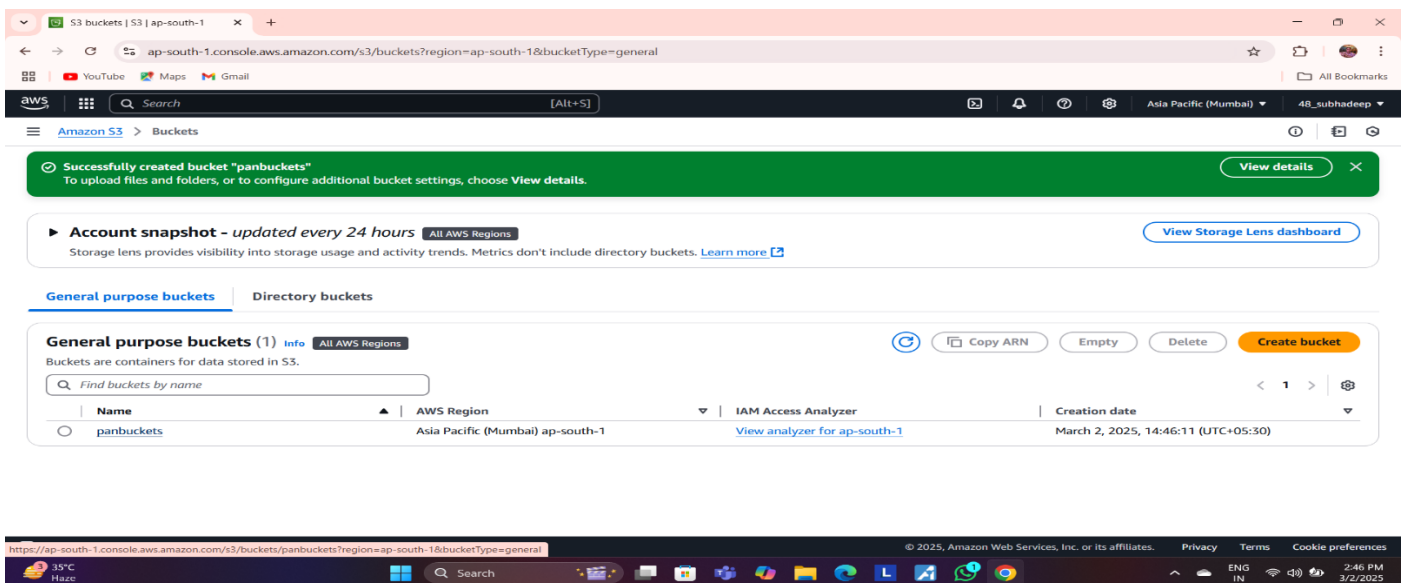


5. Now click on the bucket name (appears in blue). Details of the bucket appears. Choose the 'Upload' option, which will lead to the opening of the subsequent window.

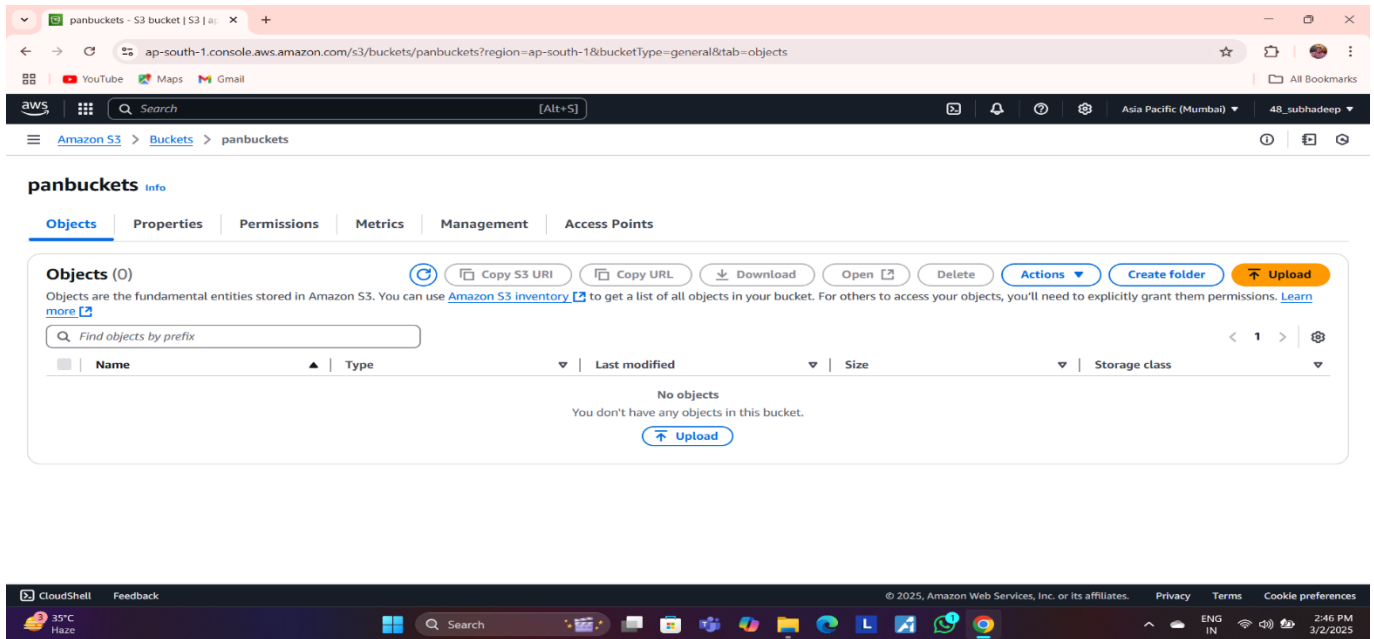


6. From there, click on 'Add files' and proceed to upload your desired file into the selected bucket (in this case, upload_me.txt). Scroll down and proceed to click on 'Upload'.

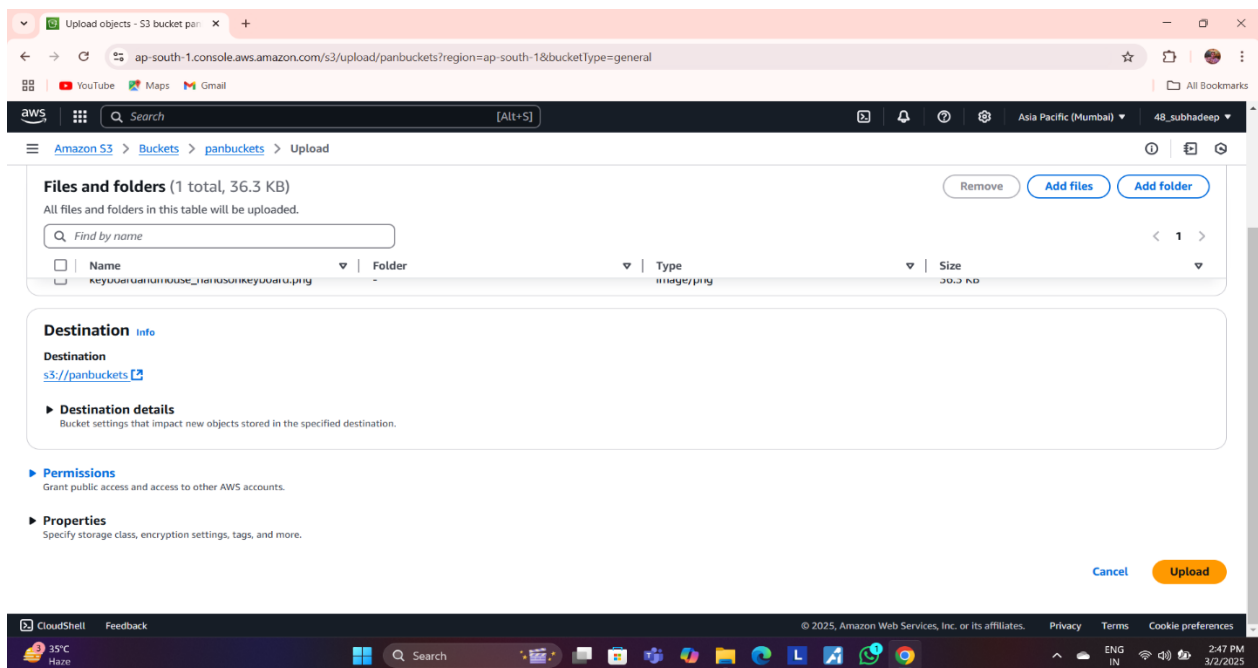


7. The notification confirms that the file has been successfully uploaded. Click on 'Close' to return. A green coloured pop-up dialogue box shall confirm the successful upload of the file.

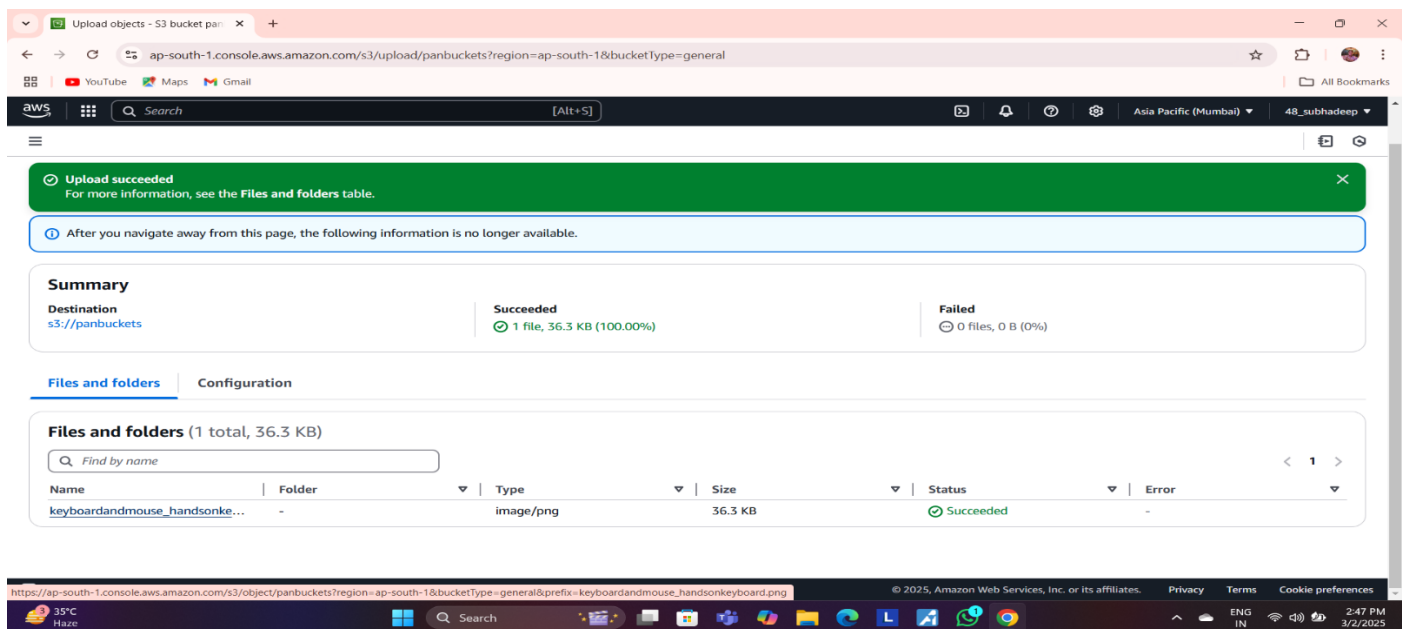


8. Now, click on the file's name (appears in blue), then click on the tag next to object URL to copy it.

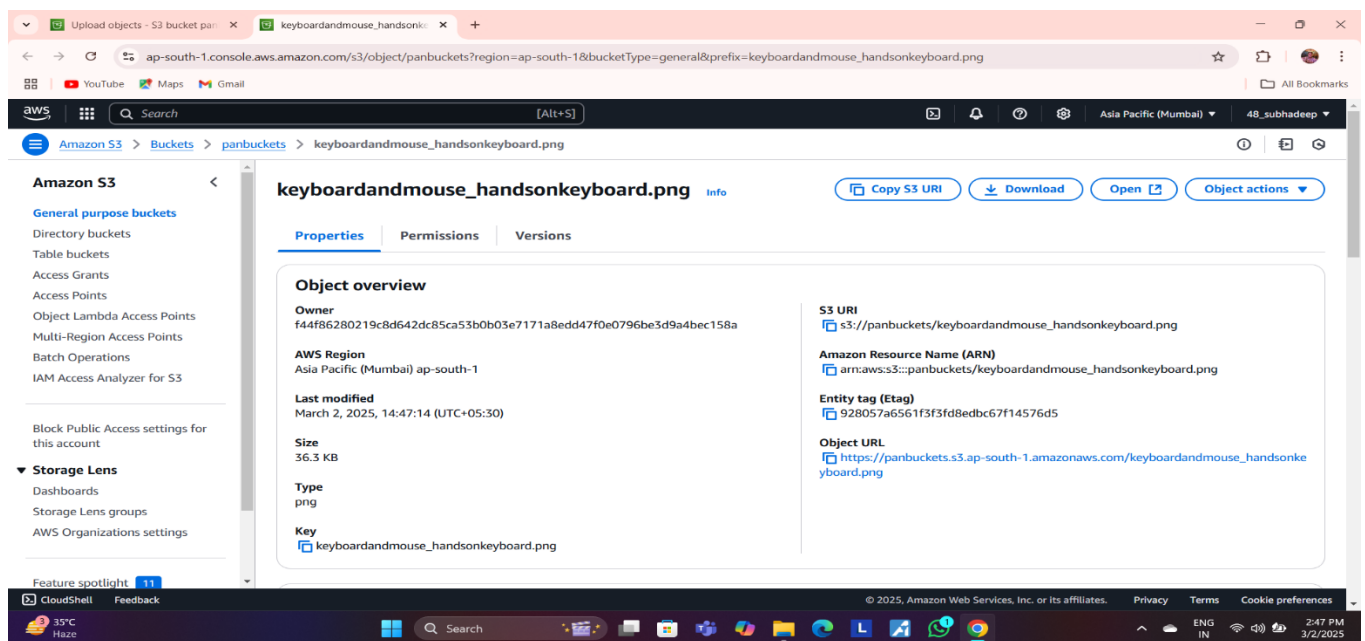


9. Navigate to a new window, paste the URL, and proceed with the search. An error appears indicating that access to the contents is restricted since this is a private bucket.

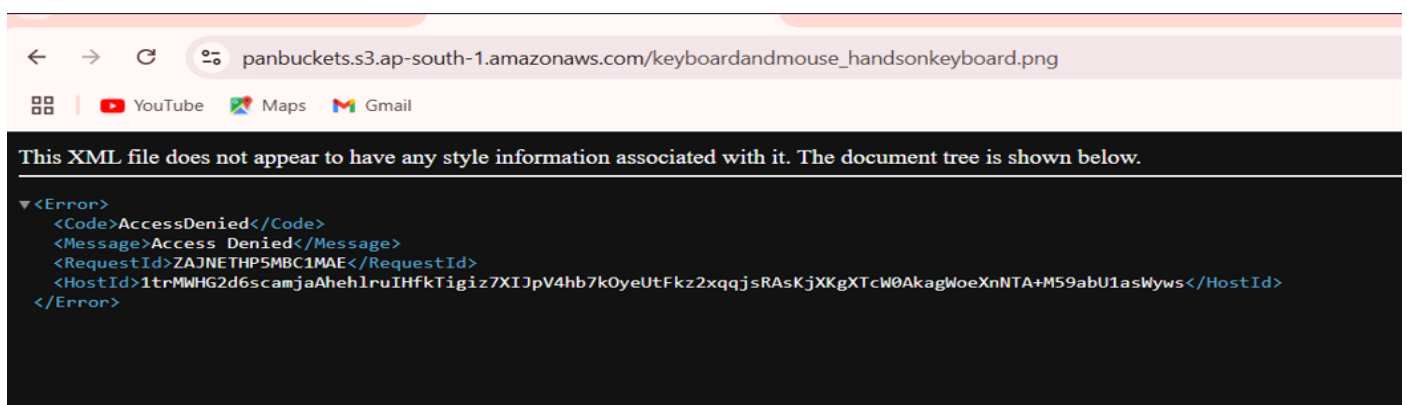

10. Close the current window, then navigate to 'Actions' and choose 'Share with a presigned URL'.

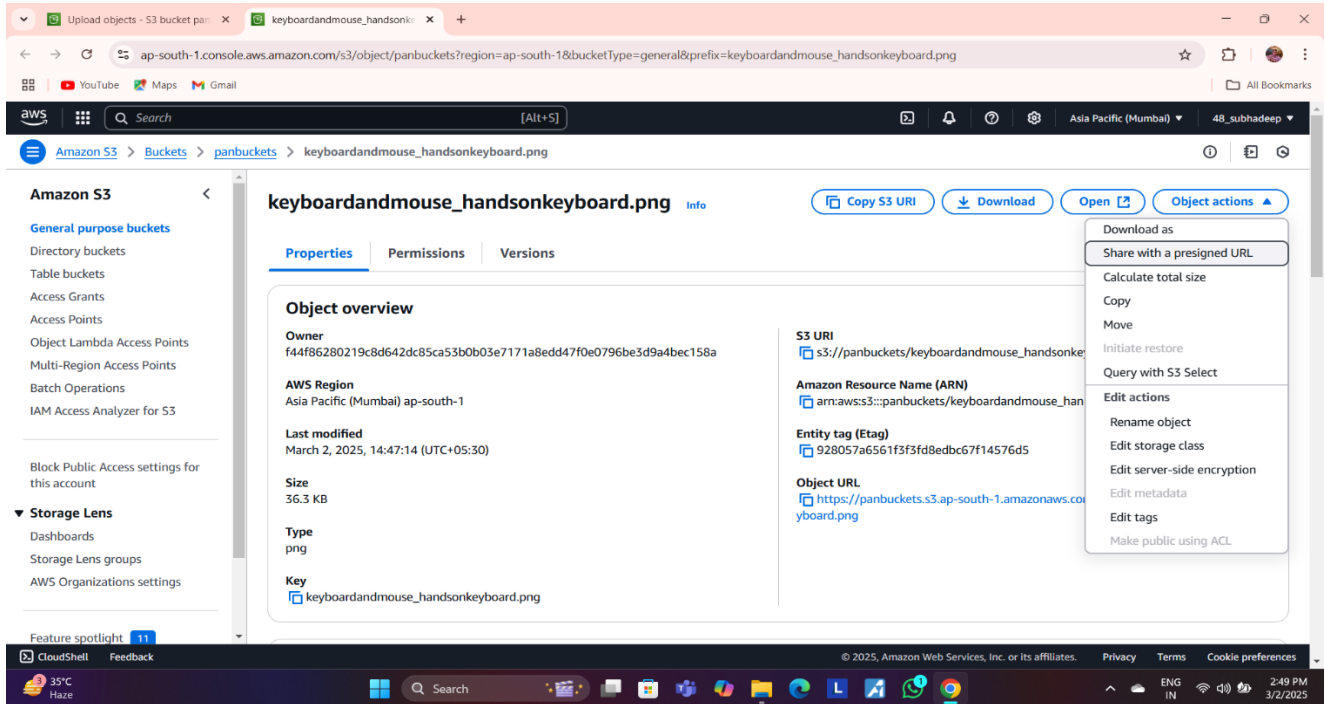

11. Select the desired duration until you want the presigned URL to expire.

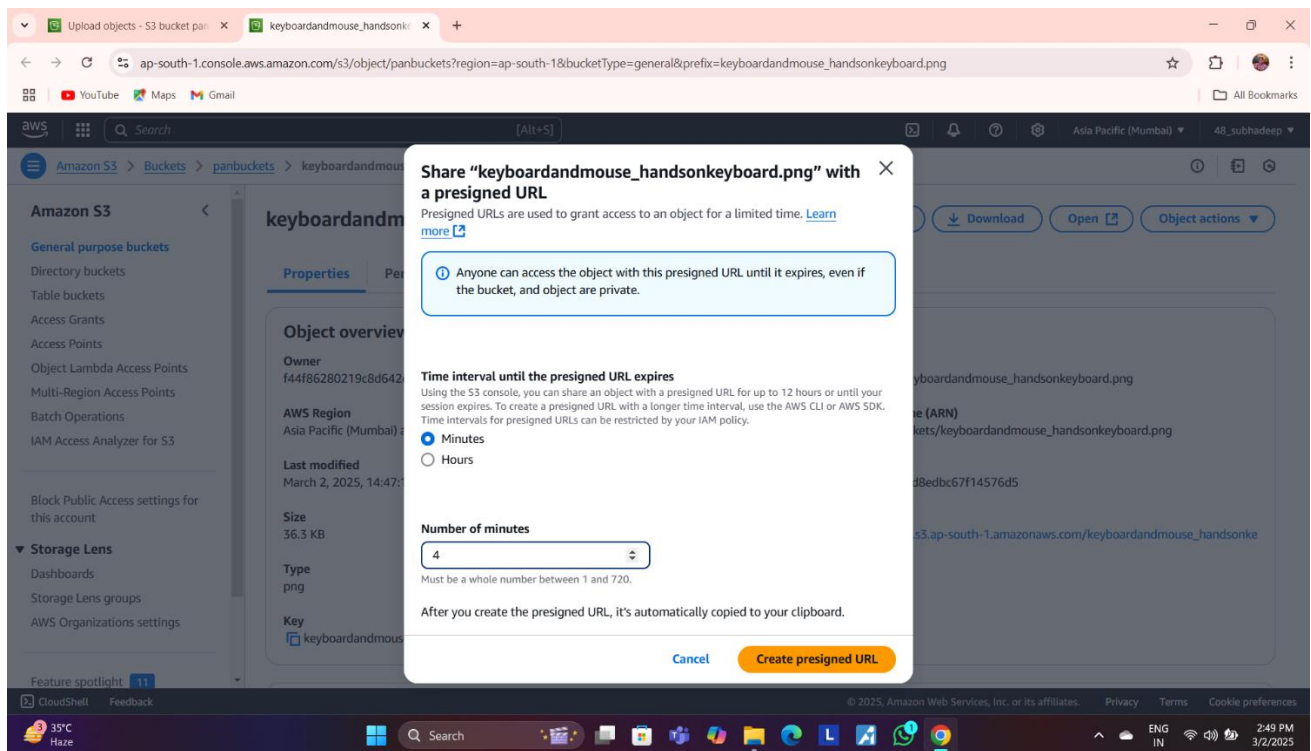

12. Copy the pre-assigned URL and paste it on a new window. Now, you can view the uploaded file.

