

# ServiceNow – SAP ECC or S/4HANA RFC Integration through SAP CPI

Created by: Marian Knotek

## Scenarios

- With SAP CPI as the middleware in between ServiceNow and SAP ECC or S/4HANA system, ServiceNow can still integrate with SAP ECC or S/4HANA, such as getting the list of vendors, creating a purchase order, and other integrations from/to SAP ECC or S/4HANA by using ServiceNow Integration Hub's SAP ECC RFC Spoke or SAP S/4HANA RFC Spoke with a few minor modifications.

## Assumptions

- Attached ServiceNow Update set is loaded in the ServiceNow instance.
- Infrastructure: SAP CPI, ServiceNow Integration Hub, SAP ECC, and SAP S/4HANA are all configured.


## Table of Contents

| S. No | Description                                                      | Page. No |
|-------|------------------------------------------------------------------|----------|
| 1.    | SAP Configuration (BTP/CPI)                                      | 2        |
| 2.    | ServiceNow Integration Hub's SAP S/4HANA RFC Spoke Configuration | 5        |
| 3.    | Test Case 1: Look Up Vendors                                     | 8        |
| 4.    | Test Case 2: Create Purchase Order                               | 14       |



# SAP Configuration (BTP/CPI)

**Purpose:** Many customers have their own middleware, such as SAP CPI, as their enterprise integration platform and gateway. Any new integration will need to first go through SAP CPI before hitting the target end systems, which means a simple passthrough data mapping needs to be created in SAP CPI first. In this section, we will go through how to create a simple data mapping between ServiceNow and SAP ECC or S/4HANA, then expose SAP CPI's listener endpoint as a service.


1. Subscribe to the Integration suite in SAP BTP and maintain connection to SAP ECC or S/4 HANA System

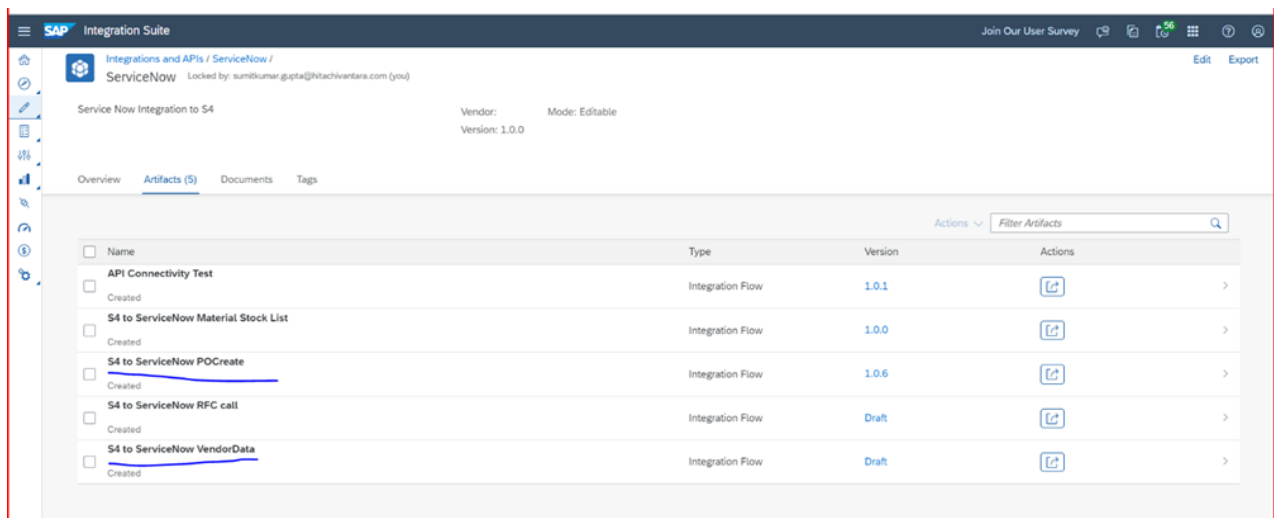


2. A request message from ServiceNow will hit SAP CPI and use HTTPS adapter CPI Connects to integrate with ECC or S/4 HANA RFC.
3. Create iflow for each of the RFC that is to be called from Servicenow, for example below iflow is for RFC ZSN\_BAPI\_GET\_VENDOR\_DATA.
4. Go to Connection and maintain the HTTPS adapter in the sender and give the endpoint.

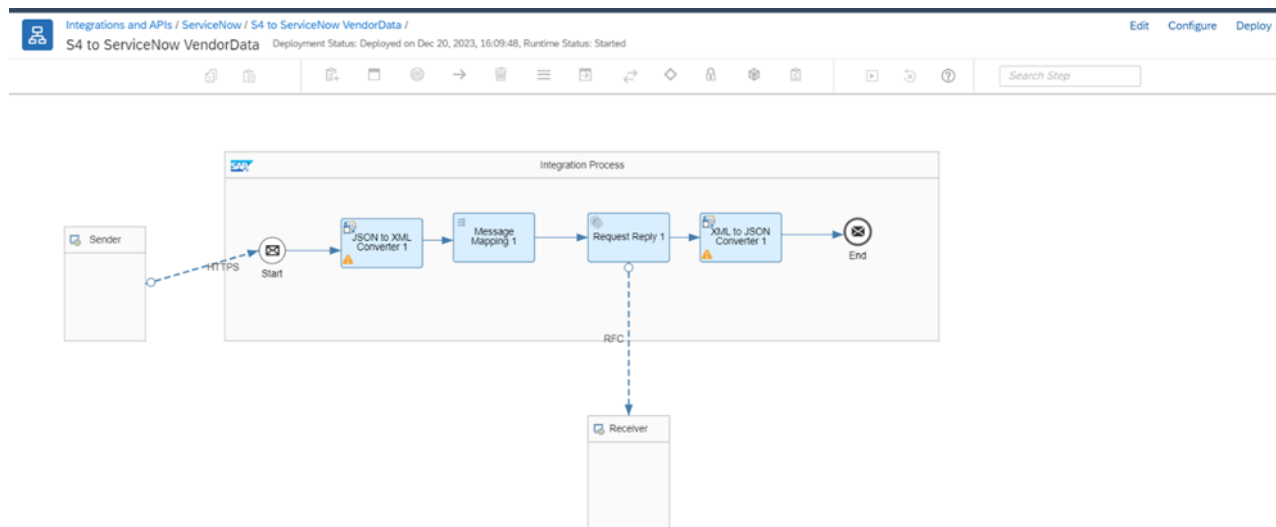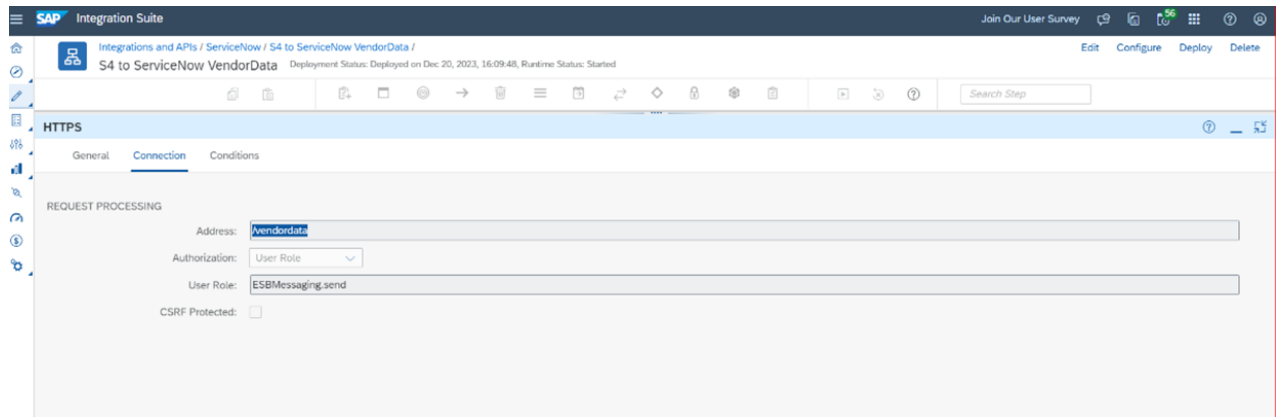


5. Create a message mapping for the RFC ZSN\_BAPI\_GET\_VENDER\_DATA target structure. On the left of the data mapping, it is the ECC or S/4HANA RFC's "vendor list" payload that will be sent from ServiceNow Integration Hub's SAP ECC RFC Spoke or SAP S/4HANA RFC Spoke, which is the same as the payload on the right that is directly exposed from ECC or S/4HANA system itself.

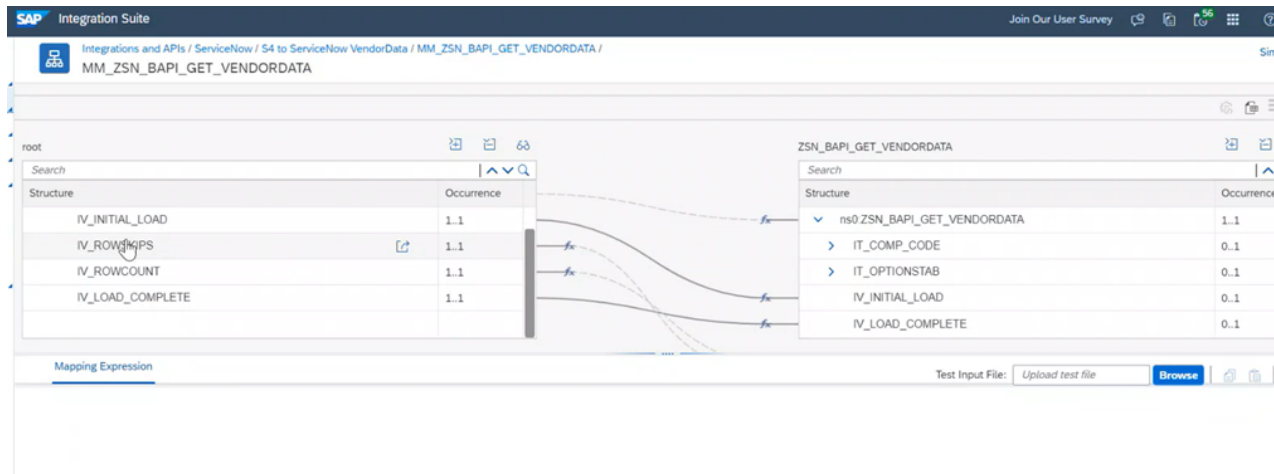

6. RFC Mapping request processing in RFC Connection in ECC or S/4 HANA.

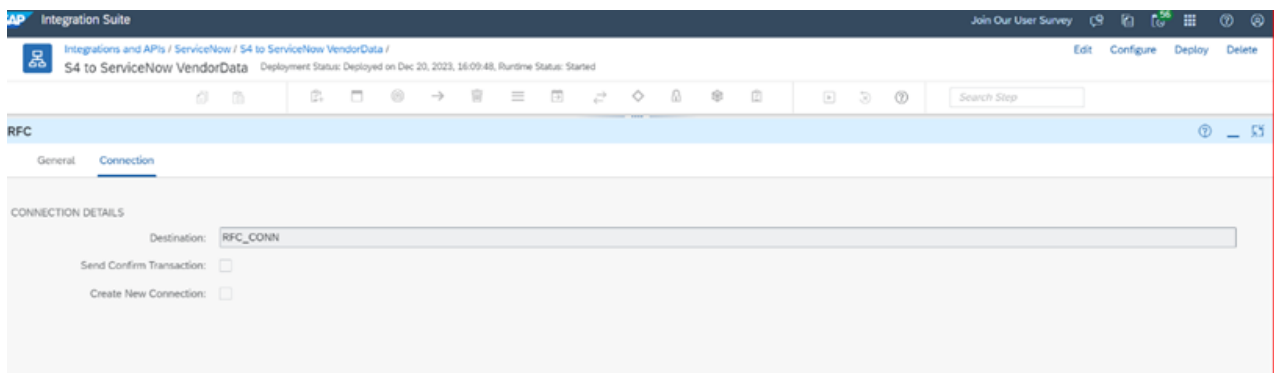

7. Finally, the iflow will generate a listener endpoint that is to be shared with ServiceNow. ServiceNow Integration Hub's SAP ECC RFC Spoke or SAP S/4HANA RFC Spoke can now send any SAP ECC or S/4HANA RFC "vendor list" payload directly to SAP CPI. SAP CPI will then pass the same payload onto SAP ECC or S/4HANA system itself.

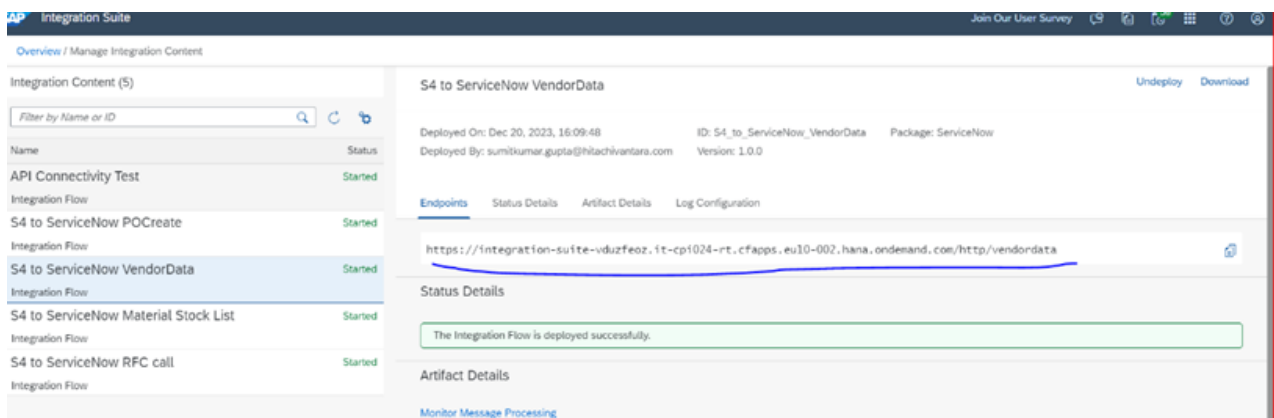

# ServiceNow Integration Hub's SAP S/4HANA RFC Spoke Configuration

**Purpose:** In the previous section, the SAP CPI has been exposed as a service via a listener endpoint. A passthrough mapping for the "Vendor List" and "Create Purchase Order" payload has been created and ready for ServiceNow Integration Hub's SAP S/4HANA RFC Spoke to integrate. In this section, we will go over how to set up ServiceNow's SAP S/4HANA RFC Spoke.

**Note:** The setup for SAP ECC RFC Spoke is almost the same.

## Step 1 – ServiceNow: Create Credential Object

1. Provide Username and password for BTP endpoint connection. (this will be provided by SAP team)

The screenshot shows the 'Basic Auth Credentials' configuration page for 'S4 Hana BTP'. The form includes fields for Name, Order, User name, Password, and an Active checkbox. The User name field contains a long alphanumeric string. Below the form is a blue informational box about connection aliases. At the bottom, there is a 'Credential alias' section with a lock icon, and a table titled 'Discovery IP Affinity' with columns for MID server, Credential ID, IP address, IP address decimal, Domain, and Type. The table currently shows 'No records to display'.

Basic Auth Credentials  
S4 Hana BTP

Name: S4 Hana BTP Order: 100

User name: sb-a47fef1a-5fef-48a4-a875-7ea627d4db11!b337800|it-rt-integration-suite-vdudzfeoz!b182722

Password: .....

Active: ☒

A connection alias resolves your connection and credential at runtime. More than one Credential can be active per Connection Alias at a time. If more than one credential is active, they will be used in order.

Credential alias:

Update Delete

Discovery IP Affinity MID server Search

Credential Affinities

| MID server            | Credential ID | IP address | IP address decimal | Domain | Type |
|-----------------------|---------------|------------|--------------------|--------|------|
| No records to display |               |            |                    |        |      |

Note: if the username is above 40 characters, you might need to extend the maximum size of the username field in form.

In navigator go to: System Definition > Tables

Search for table Credentials and open it.

| Label       | Name                  | Extends table | Extensible | Updated             | Application | Created             |
|-------------|-----------------------|---------------|------------|---------------------|-------------|---------------------|
| Credentials | discovery_credentials | (empty)       | true       | 2021-09-02 13:11:19 | Global      | 2021-09-02 13:11:19 |

Modify the following field to larger number (e.g. 200):

Table Credentials

Update Delete All Records

A table is a collection of records in the database. Each record corresponds to a row in a table, and each field on a record corresponds to a column on that table. Applications use tables and records to manage data and processes. [More Info](#)

\* Label Credentials Application Global

\* Name discovery\_credentials

| Column label       | Type                       | Reference | Max length | Default value                  |
|--------------------|----------------------------|-----------|------------|--------------------------------|
| Password           | Password (2 Way Encrypted) | (empty)   | 400        |                                |
| User name          | String                     | (empty)   | 200        |                                |
| SSH Certificate    | String                     | (empty)   | 65,000     |                                |
| SSH passphrase     | Password (2 Way Encrypted) | (empty)   | 255        |                                |
| Authentication Key | Password (2 Way Encrypted) | (empty)   | 255        |                                |
| Privacy Key        | Password (2 Way Encrypted) | (empty)   | 255        |                                |
| Domain Path        | Domain Path                | (empty)   | 255        | /                              |
| Type               | String                     | (empty)   | 80         | javascript: current.getTableNa |

## Step 2 – ServiceNow: Create Connection in SAP\_S4HANA\_RFC connection alias

1. Go to Connection & Credential Aliases
2. Open alias SAP\_S4HANA\_RFC
3. [For SAP ECC]: Open alias SAP\_ECC
4. Create new connection as following: choose credentials created in previous step, provide host that serves as endpoint for BTP connection, check use mid server option.

Connection  
SAP S4 HANA RFC BTP Connection

\* Name: SAP S4 HANA RFC BTP Connection

Credential: S4 Hana BTP

Active: ☒

Domain: global

A connection alias resolves your connection and credential at runtime. Only one Connection is active per Connection Alias at a time. [More Info](#)

\* Connection alias: sn\_sap\_s4\_hana\_rfc.SAP\_S4HANA\_

\* Host: https://integration-suite-vduzfeoz.it-cpi

Use MID server: ☒

Override default port:

Advanced MID Server Configuration

MID Selection: Specific MID Server

\* MID Server: sapmidlnx

## Step 3 – ServiceNow: Enable Connection (optional)

If there are multiple connections under the same alias, make sure that newly created connection is active.

Connection & Credential Aliases  
sn\_sap\_s4\_hana\_rfc.SAP\_S4HANA\_RFC

This record is in the SAP S4 HANA RFC Spoke application, but Global is the current application. To edit this record click [here](#).

type: Connection and Credential

Connection type: Basic

Support Multiple Active Connections: ☐

Default Retry Policy:

Configuration Template: [Select a template for configuring connection and credential records.](#)

Related Links  
[Create New Connection & Credential](#)

Connections (3) | Connection Attributes (8) | Child Aliases

Search: Name

Connection alias = sn\_sap\_s4\_hana\_rfc.SAP\_S4HANA\_RFC

| Name                           | Connection type | Active | Credential  | Use MID server | Protocol | Host                                        | Override default port | Updated             | Updated by |
|--------------------------------|-----------------|--------|-------------|----------------|----------|---------------------------------------------|-----------------------|---------------------|------------|
| SAP S4 HANA RFC BTP Connection | Connection      | true   | S4 Hana BTP | true           |          | https://integration-suite-vduzfeoz.it-cp... |                       | 2023-12-22 02:47:48 | admin      |

## Test Case 1: Look Up Vendors

ServiceNow will trigger a “look up vendors” request message using Integration Hub’s SAP ECC RFC Spoke or SAP S/4HANA RFC Spoke. The request message will first go to SAP CPI. SAP CPI will pass through the request call to SAP ECC or S/4HANA system. Then, the SAP ECC or S/4HANA system will run the received RFC call, retrieve the list of vendors, and send the response message back to SAP CPI. SAP CPI will further pass through the response message to ServiceNow.

### Step 1 – ServiceNow - Create a copy of “Look up Vendors” action and modify from ServiceNow’s SAP S/4HANA RFC Spoke

ServiceNow’s Spoke action – Look up Vendors (Middleware Support) is a modified copy of the original SAP ECC RFC Spoke or S/4HANA RFC Spoke action’s “Look up Vendors.” It provides an extra input field named “middleware” to allow flexibility for customers to integrate with or without a middleware in their end to end ServiceNow to SAP ECC or S/4HANA integration.

If the “middleware” option in the checkbox is chosen, it will run a script step that will perform a REST call directly to the middleware (configured to go through mid-server). Action will still support direct connection (when middleware input is set to false).

Modifications in “Look up Vendors (Middleware Support)” action compared to the original “Look up vendors” action:

- Input - added Middleware option.
- Modification of Look up vendors step - added logic to enable/disable script step based on middleware option.
- Added Get Credential Object step - to fetch credentials from credential object
- Added Look up Vendors (Middleware) step - to implement REST call option. There is a logic to enable/disable script step based on middleware option.
- Modification of Post Processing step - to support middleware options.



**servicenow Flow Designer**

Look up Vendors Middleware Support

Test Publish Save

**Action Outline**

- Inputs
- Pre Processing Script
- Get Connection Info step
- Look up Vendors Script
- Look up Vendors Middle...
- Post Processing Script
- Error Evaluation
- Outputs

**5. Look up Vendors Middlew...**

middleware  
username  
password

action ▶ Middleware  
step ▶ ... ▶ User name  
step ▶ ... ▶ Password

Create Variable

**Script**

```

1 function execute(inputs, outputs) {
2   try {
3     if (inputs.middleware == 'true') {
4       gs.log("Executed Middleware section" + inputs.middleware);
5       var opProp = {
6         "RFC": "ZSM_BAPI_GET_VENDORDATA",
7         "autoCommit": "True"
8       };
9       var restResponse = SapRFCUtilMod.executeRest(inputs.conn_host, inputs.username, inputs.password, opProp, inputs);
10      var responseBody = restResponse.hasError() ? restResponse.getErrorMessage() : restResponse.getBody();
11      var restStatus = restResponse.getStatusCode();
12      outputs.restresponse = responseBody;
13      outputs.status = 'success';
14    }
15  } catch (e) {
16  }
17 }
18

```

If this step fails: Stop the action and go to error evaluation

**Data**

**Input Variables**

- Connection Alias: Record
- Initial Load: True/False
- Row Skip: Integer
- Row Count: Integer
- Company Code Criteria: Array/Object
- Load Complete: True/False
- Middleware: String

**Pre Processing**

- Credential ID: String
- Connection Host: String
- Connection Parameters: JSON
- Payload: JSON
- Step Status: Object

**Get Connection Info step**

**Variables**

- Message Server: String

Action is present in the provided Update set.

## Step 2 – ServiceNow: Execute Action

1. Open Flow Designer
2. Open action “Look Up Vendors Middleware”
3. Click on Test Action
4. Fill in Middleware option as true
5. Click on Run Test

### Test Action

Run your Action to make sure it has no errors before you activate it. When the test finishes running, check the execution details to see each step's configuration, runtime values, and the log messages for any errors that occurred.

\* Connection Alias  ✕ ⓘ

Initial Load ☐

Row Skip

Row Count

Company Code Criteria ⓘ

Load Complete ☐

Middleware

☐ Run test in background ⓘ

Cancel Run Test

Note: Action can be tested from workflow as well (Middleware BTP workflow).

## Step 3 – ServiceNow: Inspect Request Payload

1. After execution is completed, open execution details
2. Open Step 5 execution details and inspect payload

Step 5 - Look up Vendors Middleware [Script] Completed 2024-01-29 03:58:49 4957ms

**Integration Metadata**

**Step Configuration**

| VARIABLE NAME    | RUNTIME VALUE                                                                                                        | CONFIGURATION                                                                                              | TYPE                       |
|------------------|----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|----------------------------|
| Required Runtime | instance                                                                                                             | instance                                                                                                   | Choice                     |
| Script           | (function execute(inputs, outputs) {<br>try {<br>if (inputs.middleware == 'true') {<br>...<br>}<br>}<br>})           | (function execute(inputs, outputs) {<br>try {<br>if (inputs.middleware == 'true') {<br>...<br>}<br>}<br>}) | Script                     |
| conn_host        | https://integration-suite-vduzfeoz.it-cpi024-rt.cfapps.eu10-002.hana.ondemand.com/http/generic/rfc/c...              | conn_host                                                                                                  | String                     |
| conn_params      | { "u_host": "", "load_balance": "", "u_group": "", "u_message_server": "", "r3name": "", "u_client": "000", "u_sy... | conn_params                                                                                                | JSON                       |
| middleware       | true                                                                                                                 | middleware                                                                                                 | True/False                 |
| password         | *****                                                                                                                | password                                                                                                   | Password (2 Way Encrypted) |
| payload          | { "IV_INITIAL_LOAD": "", "IV_ROWSKIP": "", "IV_ROWCOUNT": "", "IV_LOAD_COMPLETE": "" }                               | payload                                                                                                    | JSON                       |
| username         | sb-a47ef1a-5fef-48a4-a875-7ea627d4db11b337800 it-rt-integration-suite-vduzfeozb182722                                | user_name                                                                                                  | String                     |


Request (JSON) can be found in the resources directory.

## Step 4 – SAP Execution


1. The ServiceNow endpoint triggers a call to the SAP Remote Function Call (RFC) through the Cloud Platform Integration (CPI), using the provided payload.

The screenshot shows the 'Monitor Message Processing' interface in SAP Integration Suite. It displays a list of messages, with one message 'S4 to ServiceNow VendorData' highlighted as 'Completed' on Jan 31, 2024, at 16:56:33, taking 910 ms. The 'Properties' tab for this message shows the Message ID: AGW6LmluB3blUSmpqK7WlwO0Mq and Correlation ID: AGW6LmID8l3da5Yl5qaozRaCgLi.

2. Subsequently, the CPI relays the response, containing information from the RFC Function Module ZSN\_BAPI\_GET\_VENDOR\_DATA, back to ServiceNow.

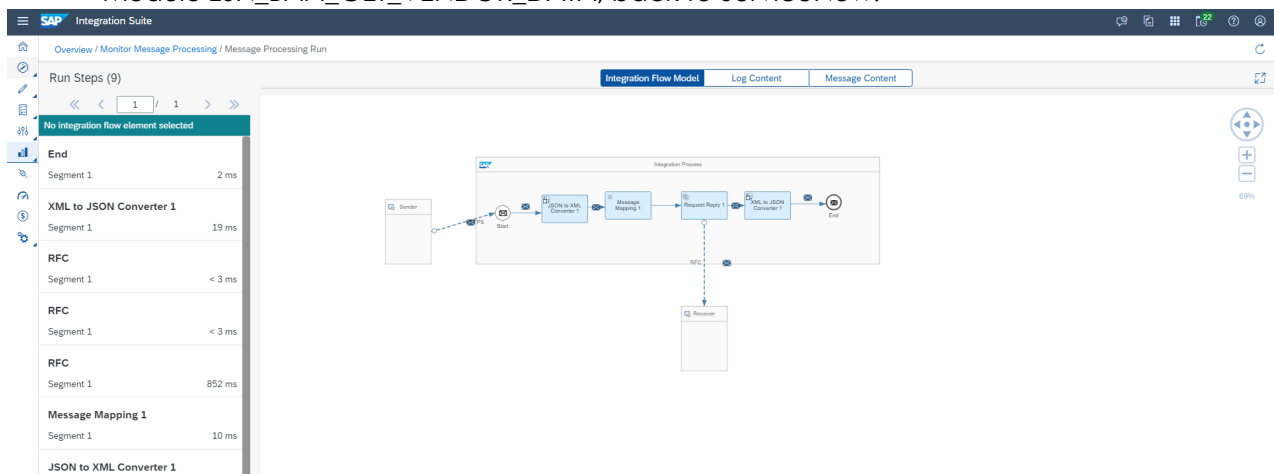


3. In this process, the payload corresponds to the import parameters of the Function Module, and the response comprises the return parameters of the same module.

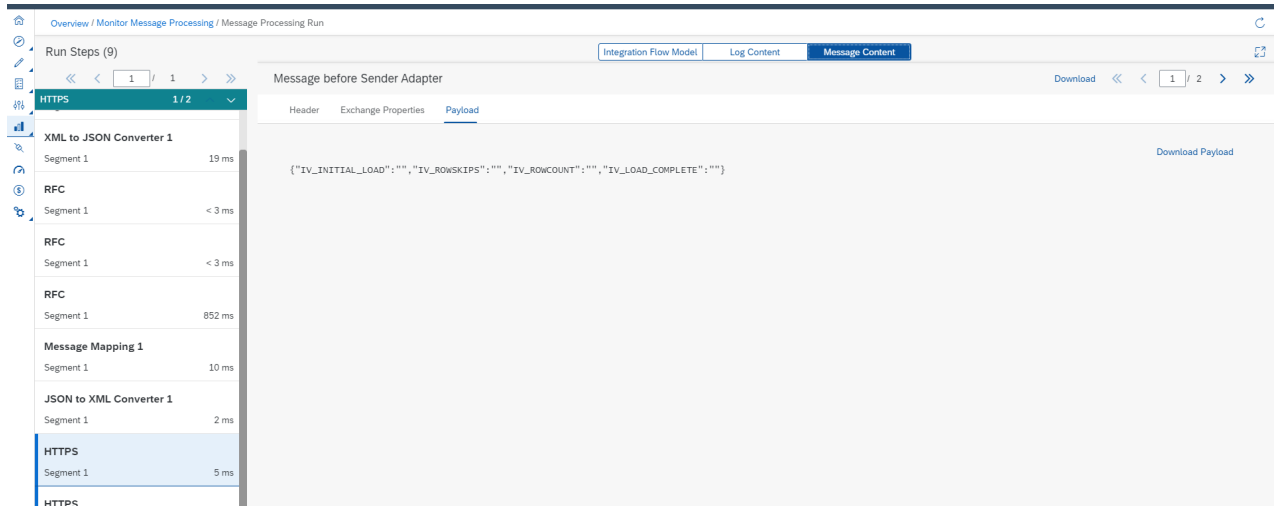

## Step 5 – ServiceNow: Inspect Response Payload

1. Open execution details
2. Inspect output data section – it will contain vendors details object

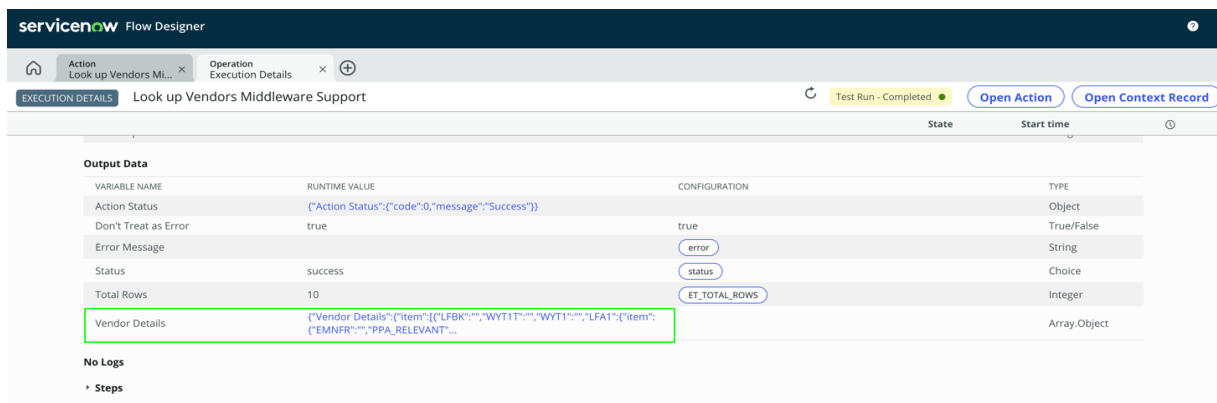

Objects can be further inspected by clicking on value.

Viewing vendor\_details [array.object] ✕

Raw Text Formatted

```
{
  "Vendor Details": {
    "item": [
      {
        "LFBK": "",
        "WYTI1": "",
        "WYTI2": "",
        "LFA1": {
          "item": {
            "EMNFR": "",
            "PPA_RELEVANT": "",
            "ENTPUB": "",
            "STKZN": "",
            "AU_PAYMENT_EXEMPT": "",
            "STKZA": "",
            "PAYTRSN": "",
            "J_1IEXDI": "",
            "LEGALNAT": "0000",
            "GBORT": "",
            "ICMSTAXPAY": "",
            "DECREGPC": "",
            "BORGR_DATUM": "0000-00-00",
            "MIN_COMP": "",
            "J_SC_CURRENCY": "",
            "SAM_UE_ID": "",
            "UPDAT": "0000-00-00",
            "SPRAS": "E",
            "RG": "",
            "BUBKZ": "0",
            "PFACH": "",
            "REGIO": "",
            "PSOHS": "",
            "ADDR2_HOUSE_NUM": "",
            "J_1IEXCIVE": "",
            "VBUND": "",
            "PARTNER_NAME": "",
            "CRC_NUM": "",
            "AU_DOMESTIC_NATURE": "",
            "FR_OCCUPATION": "",
            "ERDAT": "2023-11-29",
            "PSOIS": "",
            "VEN_CLASS": "",
            "BRSCH": ""
          }
        }
      ]
    }
  }
}
```

Response (JSON) can be found in the resources directory.

## Test Case 2: Create Purchase Order

ServiceNow will trigger a new action “create purchase order middleware” request message using Integration Hub's SAP ECC RFC Spoke or SAP S/4HANA RFC Spoke. The request message will first go to SAP CPI. SAP CPI will pass through the request call to SAP ECC or S/4HANA system. Then, the SAP ECC or S/4HANA system will run the received RFC call, create a new purchase order, and send the response message back to SAP CPI. SAP CPI will further pass through the response message to ServiceNow.

### Step 1 – Create new “Create Purchase Order Middleware” action based on ServiceNow’s SAP S/4HANA RFC Spoke

“Create Purchase Order (Middleware)” Spoke action is created as a simple wrapper with REST step containing JSON payload that is being sent to a middleware endpoint, like SAP CPI. To simulate the original approach and to support a single endpoint for multiple request types, opProp header containing the RFC name is also part of the action.

This method has been chosen as a potential alternative to modification of existing spoke – create new spoke for middleware that would be implemented using the REST step.

Implementation details:

- In REST step, make sure Connection details > Base URL is correct
- In REST step, make sure Method you chose is POST
- In REST step, make sure you provide opProp header and payload as it would be generated in original action

The screenshot displays the ServiceNow Flow Designer interface for configuring a REST step. The main panel is titled "1. REST step" and shows the following configuration:

- Connection Details:**
  - Connection: Use Connection Alias
  - Connection Alias: SAP\_BTP\_TEST
  - Base URL: <https://integration-suite-vdzfeoz.it-cpi024-rt.cfapps.eu10-002.hana.ondemand.com/http/POCreate>
- Request Details:**
  - Build Request: Manually
  - Resource Path: (empty)
  - HTTP Method: POST

The "Data" panel on the right shows the "REST step" configuration with the following variables:

- Variables:**
  - Credential Value: Password (2 Way ...)
- Outputs:**
  - Error Message: String
  - Response Headers: String
  - Status Code: String
  - Response Body: String
  - Error Code: String
  - Step Status: Object

For demo purposes, a working JSON request payload is directly parsed into the REST step and ready to call SAP CPI's HTTP listener endpoint. In the real life scenario, customers can leverage the


existing design patterns on the pre-processing step to create the JSON request message from the Spoke input fields, and the post-processing step to render the JSON response messages for the Spoke output fields.

The screenshot displays the ServiceNow Flow Designer interface for a workflow named "Create Purchase Order Middleware". The interface is divided into several sections:

- Header:** Includes the ServiceNow logo, "Flow Designer", and a search bar.
- Navigation:** A sidebar on the left shows the "Action Outline" with steps: "Inputs", "1. REST step", "Error Evaluation", and "Outputs".
- REST Step Configuration:**
  - REST {REST}** tab is selected.
  - Headers:** A table with columns "Name" and "Value". One header is defined: "opProp" with the value {"RFC":"BAPL\_PO\_CREATE1","autoCommit":"true"}.
  - Request Content:** A text area containing a JSON payload for a PO header, including fields like DELETE\_IND, GR\_MESSAGE, LOGSYSTEM, SHIPCOND, ITEM\_INTVL, RETENTION\_PERCENTAGE, RETENTION\_TYPE, DSCT\_PCT1, COLLECT\_NO, QUOT\_DATE, DOWNPAY\_DUEDATE, DOC\_TYPE, STATUS, SHIPTYPE, DOWNPAY\_TYPE, DSCT\_PCT2, CUSTOMER, HANDOVERLOC, PUR\_GROUP, COMP\_CODE, CREATED\_BY, DOWNPAY\_PERCENT, TELEPHONE, DSCT3\_TO, REASON\_CANCEL, OUR\_REF, CURRENCY\_ISO, AGREEMENT, DOWNPAY\_AMOUNT, PO\_NUMBER, INCOTERMS2, INCOTERMS1, CREAT\_DATE, SUBITEMINT, VPER\_START, VAT\_CNTRY\_ISO, VAT\_CNTRY, EXCH\_RATE, DSCT2\_TO, PO\_REL\_IND, INCOTERMS3L, REF\_1, PURCH\_ORG, EX\_RATE\_FX, MEMORY, PPRINTTRMS, REL\_STATUS, SUPPL\_PLNT, CURRENCY, DSCT1\_TO, QUOTATION, VPER\_END, DIFF\_INV, REASON\_CODE, LANGU\_ISO, LANGU, INCOTERMSV, SALES\_PERS, and MEMORYTYPE.
- Data Panel:** On the right, it shows "Input Variables" (Credential Value, Password (2 Way ...)) and "Output Variables" (Error Message, Response Headers, Status Code, Response Body, Error Code, Step Status, Action Status).

## Step 2 – ServiceNow: Execute Action


1. Open Flow Designer
2. Open action "Create Purchase Order Middleware"
3. Click on Test Action
4. Click on Run Test

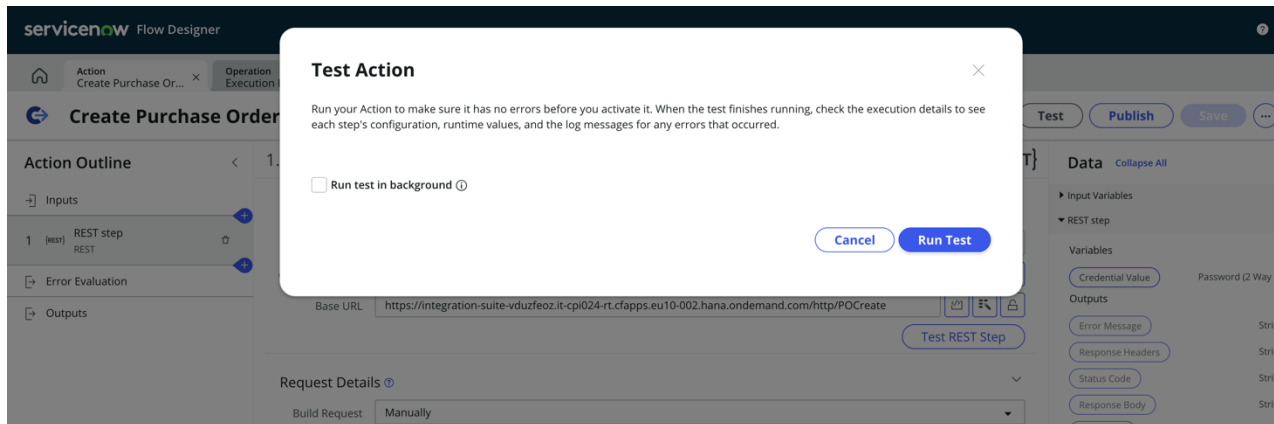

Note: Action can be tested from workflow as well (Middleware BTP workflow).

## Step 3 – ServiceNow: Inspect Request Payload

1. After execution is completed, open execution details
2. Open Step 1 execution details and inspect payload

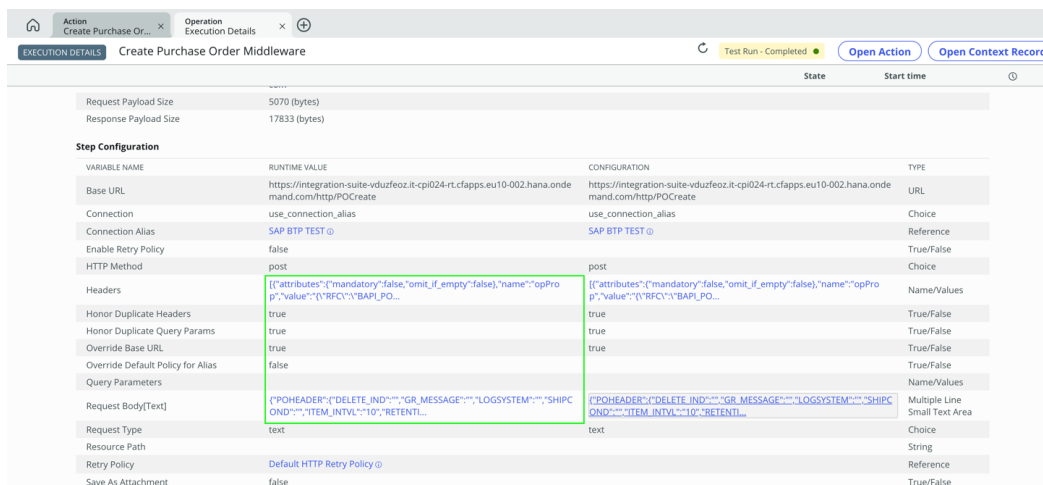


Request (JSON) can be found in the resources directory.




## Step 4 – SAP execution

1. The ServiceNow endpoint triggers a call to the SAP Remote Function Call (RFC) through the Cloud Platform Integration (CPI), using the provided payload.

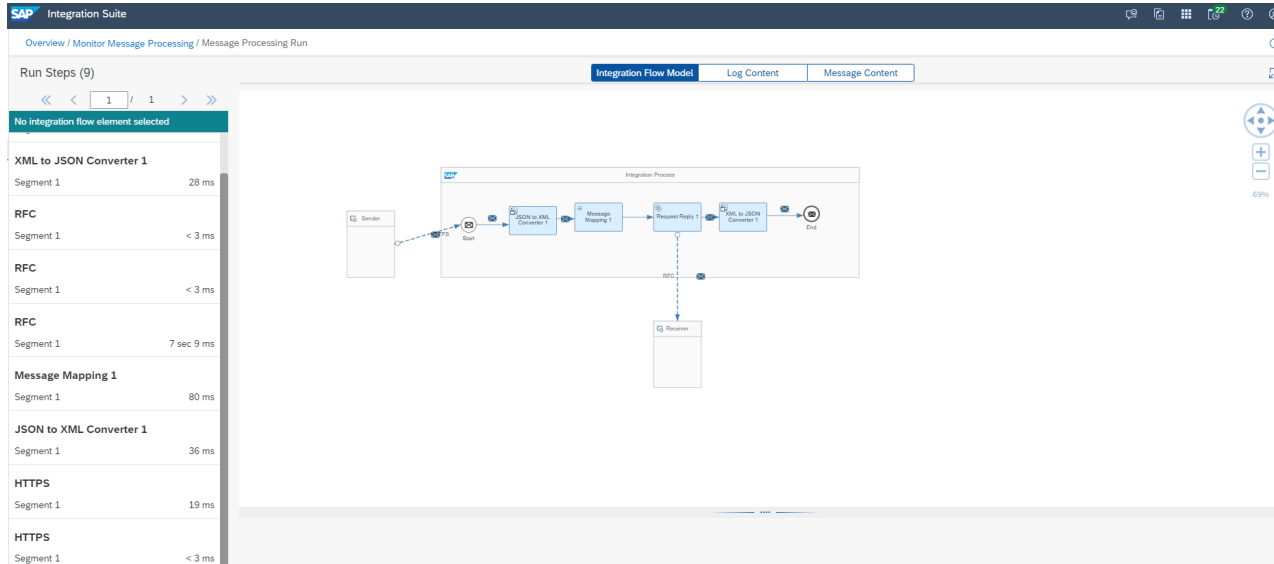

2. Subsequently, the CPI relays the response, containing information from the RFC Function Module `BAPI_PO_CREATE1`, back to ServiceNow.

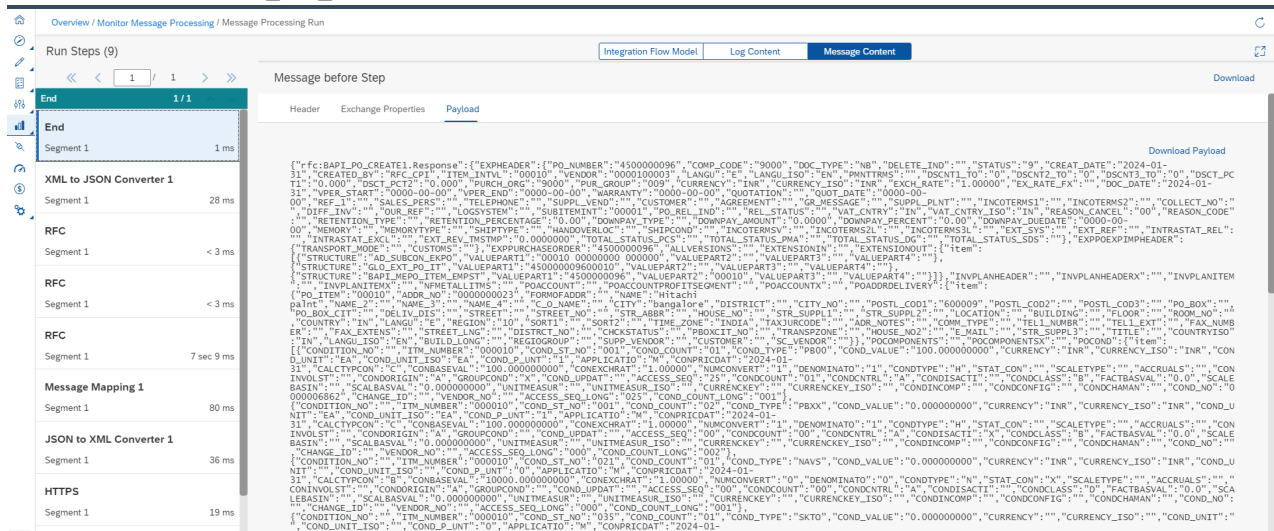

3. In this process, the payload corresponds to the import parameters of the Function Module, and the response comprises the return parameters of the same module.

## Step 5 – ServiceNow: Inspect Response Payload

1. Open execution details
2. Inspect output data section – it will contain vendors details object

Objects can be further inspected by clicking on value.

Viewing response\_body [string]



Rendered HTML

Raw Text

Code

```
1 {"rfc":BAPI_PO_CREATE1.Response":{"EXPHEADER":
{"PO_NUMBER":"4500000095","COMP_CODE":"9000","DOC_TYPE":"N8","DELETE_IND":"","STATUS":"9","CREAT_DATE":"2024-01-
29","CREATED_BY":"RFC_CPI","ITEM_INTVL":"00010","VENDOR":"0000100003","LANGU":"E","LANGU_ISO":"EN","PMNTTMS":"","DSCNT1_TO":"0","DSCNT2_TO":"0","DSC
NT3_TO":"0","DSCNT_PCT1":"0.000","DSCNT_PCT2":"0.000","PURCH_ORG":"9000","PUR_GROUP":"009","CURRENCY":"INR","CURRENCY_ISO":"INR","EXCH_RATE":"1.00000",
"EX_RATE_FX":"","DOC_DATE":"2024-01-29","VPER_START":"0000-00-00","VPER_END":"0000-00-00","WARRANTY":"0000-00-00","QUOTATION":"","QUOT_DATE":"0000-
00-00","REF_1":"","SALES_PERS":"","TELEPHONE":"","SUPPL_VEND":"","CUSTOMER":"","AGREEMENT":"","GR_MESSAGE":"","SUPPL_PLNT":"","INCOTERMS1":"","INCOTERMS
2":"","COLLECT_NO":"","DIFF_INV":"","OUR_REF":"","LOGSYSTEM":"","SUBITEMINT":"00001","PO_REL_IND":"","REL_STATUS":"","VAT_CNTRY":"IN","VAT_CNTRY_ISO"
:"IN","REASON_CANCEL":"00","REASON_CODE":"","RETENTION_TYPE":"","RETENTION_PERCENTAGE":"0.00","DOWNPAY_TYPE":"","DOWNPAY_AMOUNT":"0.00000","DOWNPAY_PE
RCENT":"0.00","DOWNPAY_DUEDATE":"0000-00-
00","MEMORY":"","MEMORYTYPE":"","SHIPTYPE":"","HANDOVERLOC":"","SHIPCOND":"","INCOTERMSV":"","INCOTERMS2L":"","INCOTERMS3L":"","EXT_SYS":"","EXT_REF"
":"","INTRASTAT_REL":"","INTRASTAT_EXCL":"","EXT_REV_TMSTMP":"0.0000000","TOTAL_STATUS_PCS":"","TOTAL_STATUS_PMA":"","TOTAL_STATUS_DG":"","TOTAL_STATU
S_SDS":"","EXPPPOEXPIMPHEADER":{"TRANSPORT_MODE":"","CUSTOMS":"","EXPPPURCHASEORDER":"4500000095","ALLVERSIONS":"","EXTENSIONIN":"","EXTENSIONOUT":
{"item":{"STRUCTURE":"AD_SUBCON_EKPO","VALUEPART1":"00010 00000000 000000","VALUEPART2":"","VALUEPART3":"","VALUEPART4":""},
{"STRUCTURE":"GLO_EXT_PO_IT","VALUEPART1":"450000009500010","VALUEPART2":"","VALUEPART3":"","VALUEPART4":""},
{"STRUCTURE":"BAPT_MEPO_ITEM_EMPST","VALUEPART1":"4500000095","VALUEPART2":"00010","VALUEPART3":"","VALUEPART4":""}},INVPLANHEADER":"","INVPLANHEAD
ERX":"","INVPLANITEM":"","INVPLANITEMX":"","NFMETALLITMS":"","POACCOUNT":"","POACCOUNTPROFITSEGMENT":"","POACCOUNTX":"","POADDRDELIVERY":{"item":
{"PO_ITEM":"00010","ADDR_NO":"0000000023","FORMOFADDR":"","NAME":"Hitachi
palnt","NAME_2":"","NAME_3":"","NAME_4":"","C_O_NAME":"","CITY":"bangalore","DISTRICT":"","CITY_NO":"","POSTL_COD1":"600009","POSTL_COD2":"","POSTL_C
OD3":"","PO_BOX":"","PO_BOX_CIT":"","DELIV_DIS":"","STREET":"","STREET_NO":"","STR_ABBR":"","HOUSE_NO":"","STR_SUPPL1":"","STR_SUPPL2":"","LOCATION":
":"","BUILDING":"","FLOOR":"","ROOM_NO":"","COUNTRY":"IN","LANGU":"E","REGION":"10","SORT1":"","SORT2":"","TIME_ZONE":"INDIA","TAXJURCODE":"","ADR_NOTE
S":"","COMM_TYPE":"","TEL1_NUMBR":"","TEL1_EXT":"","FAX_NUMBER":"","FAX_EXTENS":"","STREET_LNG":"","DISTRCT_NO":"","CHCKSTATUS":"","PBOXCIT_NO":"","T
RANSPZONE":"","HOUSE_NO2":"","E_MAIL":"","STR_SUPPL3":"","TITLE":"","COUNTRYISO":"IN","LANGU_ISO":"EN","BUILD_LONG":"","REGIOGROUP":"","SUPP_VENDOR":
":"","CUSTOMER":"","SC_VENDOR":"","POCOMPONENTS":"","POCOMPONENTSX":"","POCOND":{"item":
[{"CONDITION_NO":"","ITM_NUMBER":"000010","COND_ST_NO":"001","COND_COUNT":"01","COND_TYPE":"PB00","COND_VALUE":"100.000000000","CURRENCY":"INR","CURR
ENCY_ISO":"INR","COND_UNIT":"EA","COND_UNIT_ISO":"EA","COND_P_UNT":"1","APPLICATIO":"M","CONPRICDAT":"2024-01-
29","CALCTYPCON":"C","CONBASEVAL":"100.000000000","CONEXCHRAT":"1.00000","NUMCONVERT":"1","DENOMINATO":"1","CONDTYPE":"H","STAT_CON":"","SCALATYPE":""

```

Close

Response (JSON) can be found in the resources directory.

## Step 6 – Validation on SAP Side

One can validate the PO created from the response from servicenow and open it in SAP ME23N.

Standard PO 4500000088 Created by RFC\_USER

Document Overview On: [Icons] [Print Preview] [Messages] [Personal Setting]

NS Standard PO: 4500000088 Supplier: 100003 Hitachi Energy Doc. Date: 22.12.2023

| S.  | Item | Material | Short Text   | PO Quantity | Deliv. Date | Net Price | Cur... | Por | OPU | Mat Group      | Plant         | Stor. Locat   |
|-----|------|----------|--------------|-------------|-------------|-----------|--------|-----|-----|----------------|---------------|---------------|
| 1.0 |      | 101228   | clutch plate | 1.00        | 18.12.2020  | 100.00    | EUR    | 1   | PA  | Material group | Hitachi plant | ROH str. loc. |

Add Planning

Item: 101228, clutch plate

Material Data | Quantities/Weights | Delivery Schedule | Delivery | Invoice | Conditions | Info | Texts | Delivery Address | Confirmations | Condition Control | Retail | Instruments

Overdel. Tol. 0.0 % ☒ Unlimited  
 Underdel. Tol. 0.0 %  
 Shipping Instr.   
 Stock Type: Unrestricted use  
 Item Shelf life 0   
 QA Control Key   
 1st Rem./Exped. 0   
 2nd Rem./Exped. 0   
 3rd Rem./Exped. 0   
 No. Exped. 0   
 Pl. Del. Time 2   
 GR Proc. Time 0   
☒ Goods Receipt   
☐ GR non-validated   
☐ Deliv. Compl.   
☐ Part Del./Item   
☐ Compl. Del.   
☐ Goods Count Corr.   
 Latest GR Date   
 SAP S4H (1) 000 GLS-HS-SE-CL OVR