Updated support for Playwright with Typescript in AI extension using vibe coding

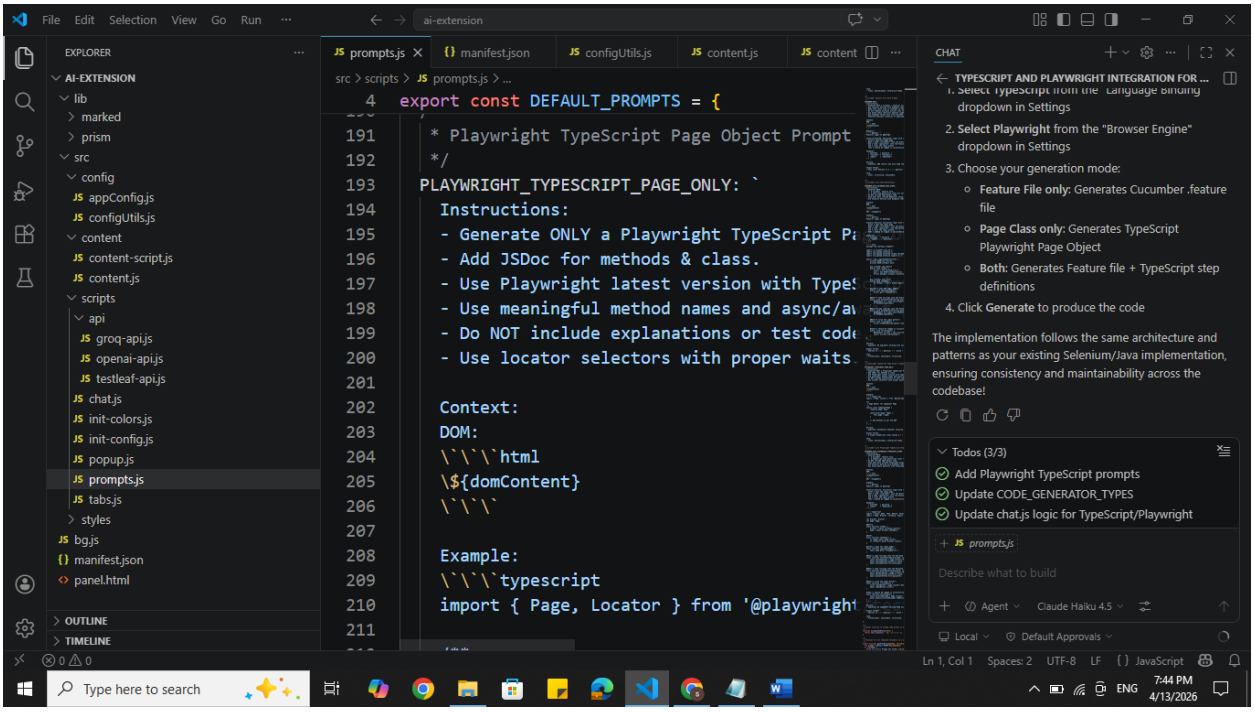

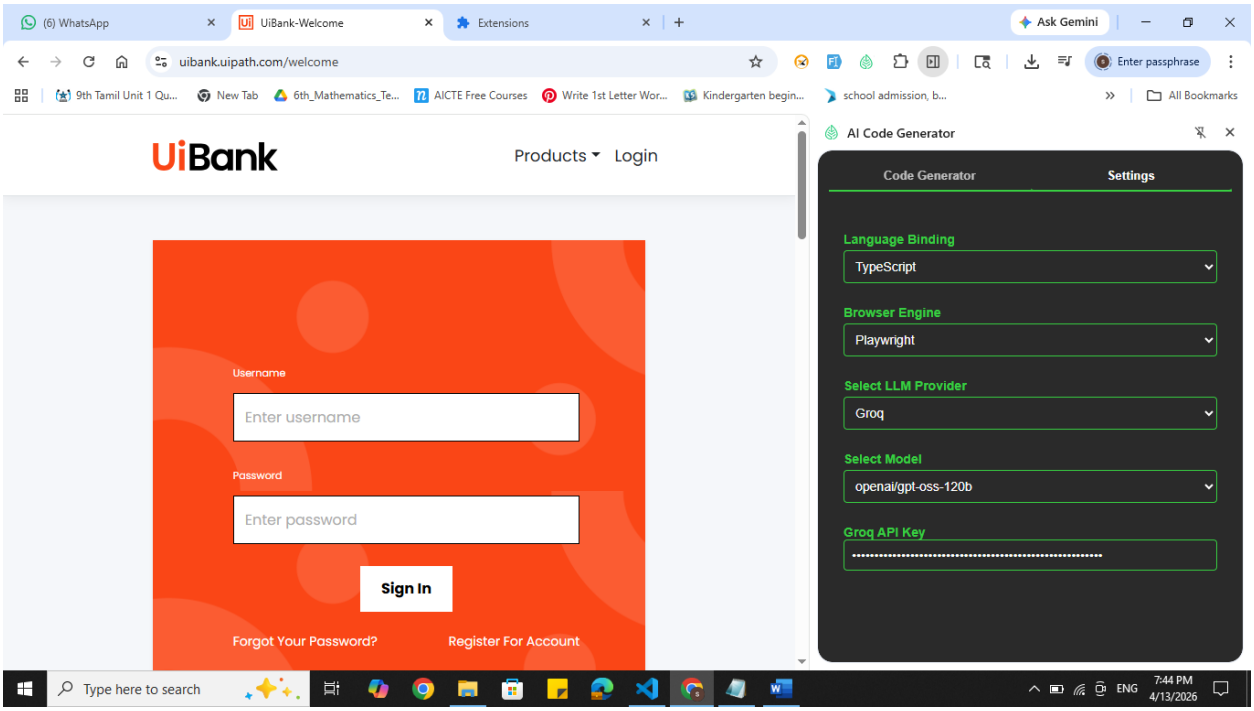

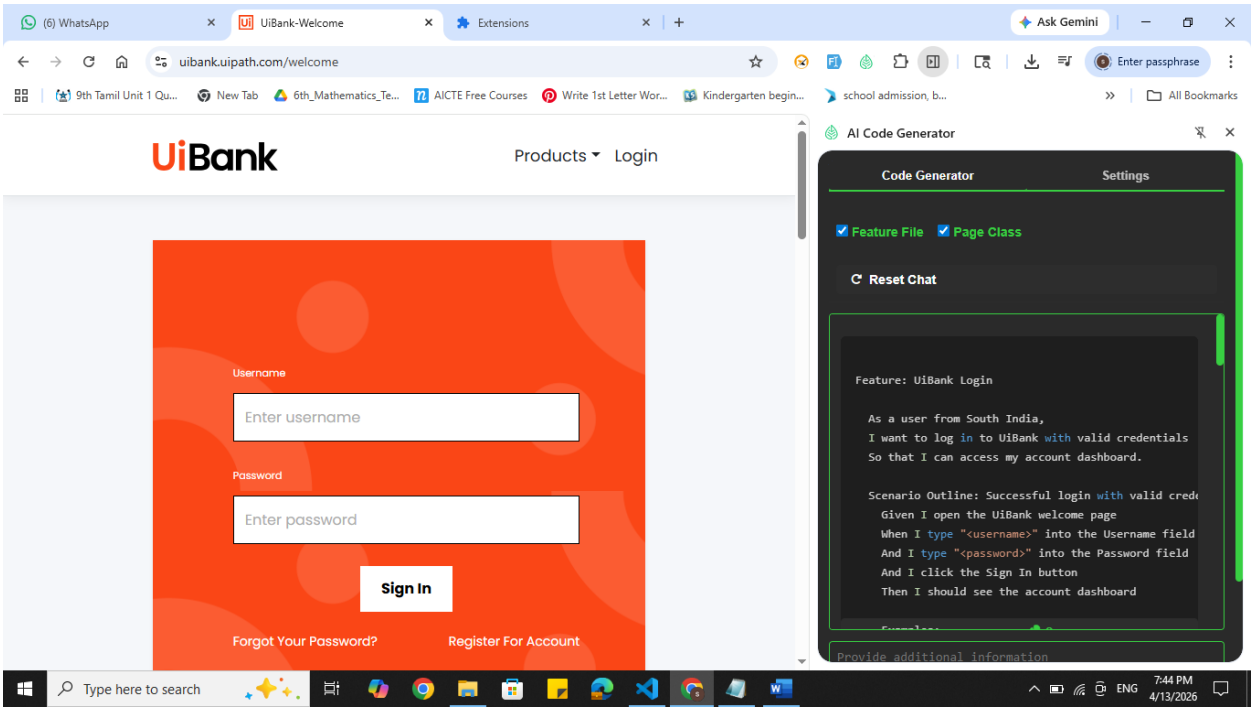

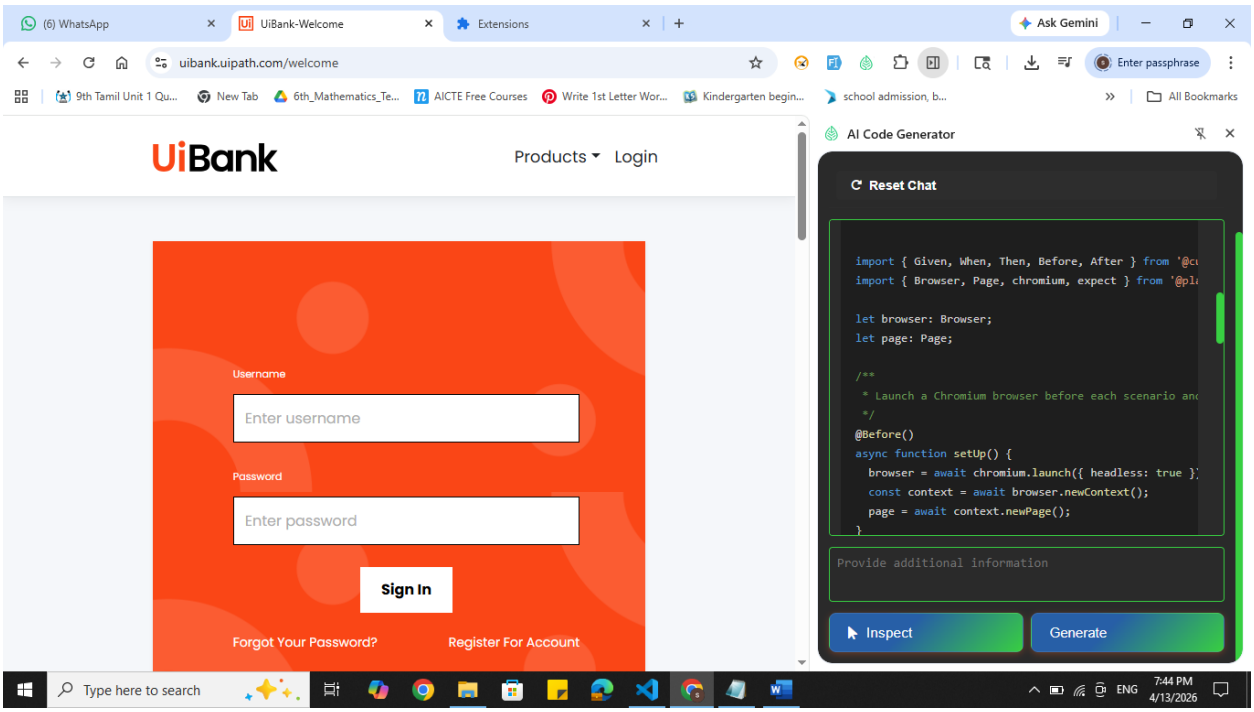

Generated output:

Feature File

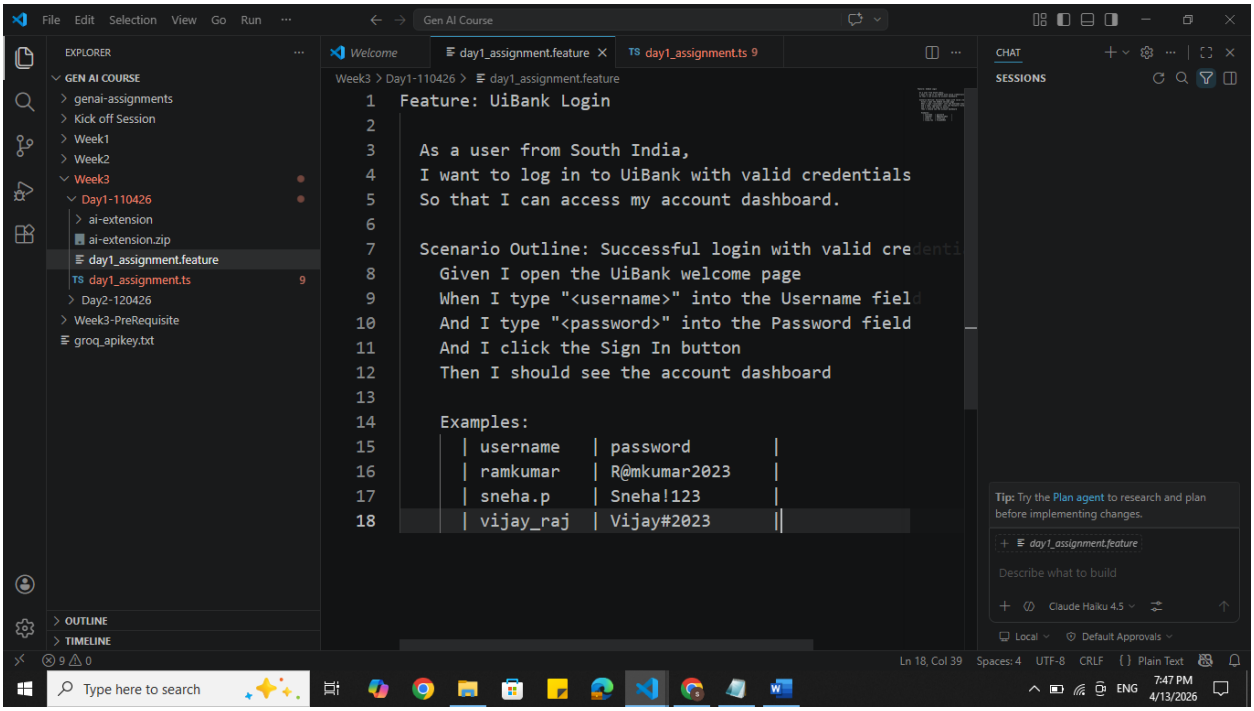

TS file:

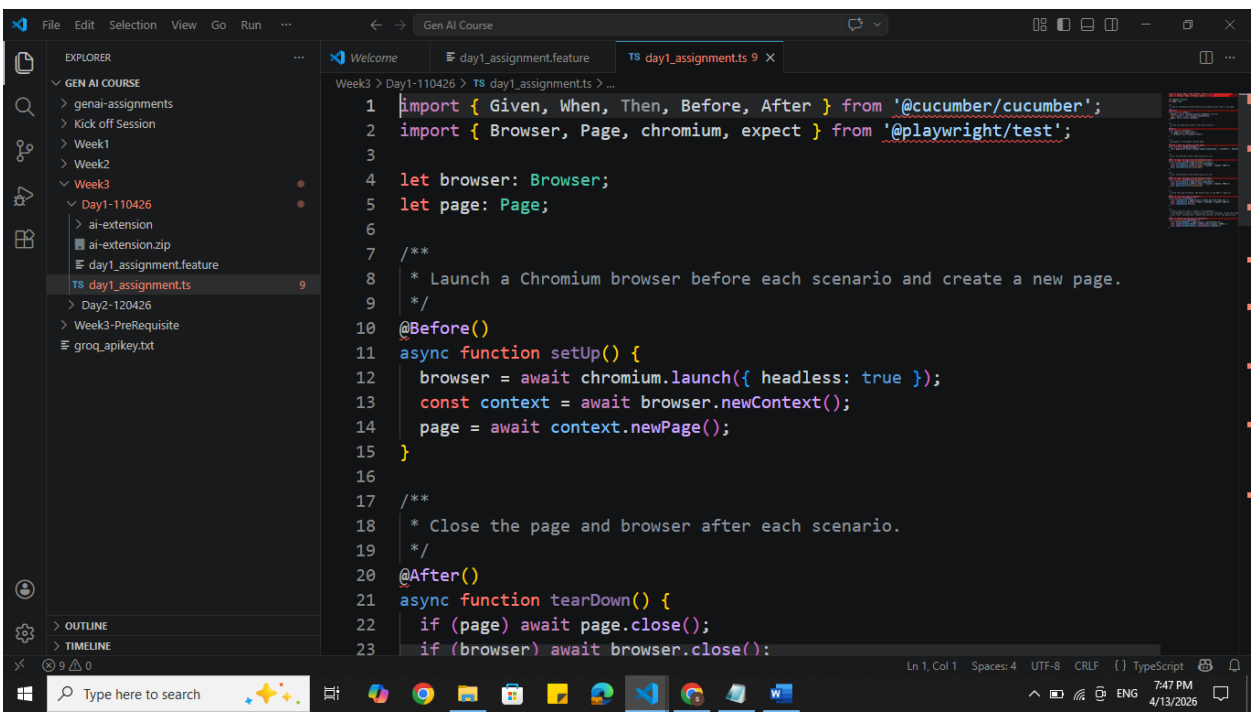

Feature file content:

Feature: UiBank Login

As a user from South India,

I want to log in to UiBank with valid credentials

So that I can access my account dashboard.

Scenario Outline: Successful login with valid credentials

Given I open the UiBank welcome page

When I type "<username>" into the Username field

And I type "<password>" into the Password field

And I click the Sign In button

Then I should see the account dashboard

Examples:

| username | password |

| ramkumar | R@mkumar2023 |

| sneha.p | Sneha!123 |

| vijay_raj | Vijay#2023 |

TS file content:

```
import { Given, When, Then, Before, After } from
'@cucumber/cucumber';
import { Browser, Page, chromium, expect } from
'@playwright/test';

let browser: Browser;
let page: Page;
```

```
/**
 * Launch a Chromium browser before each scenario and
create a new page.
 */
@Before()
async function setUp() {
  browser = await chromium.launch({ headless: true });
  const context = await browser.newContext();
  page = await context.newPage();
}

/**
 * Close the page and browser after each scenario.
 */
@After()
async function tearDown() {
  if (page) await page.close();
  if (browser) await browser.close();
}

/**
 * Navigate to the UiBank welcome page.
 */
@Given('I open the UiBank welcome page')
async function openWelcomePage() {
  await page.goto('https://uibank.uipath.com/welcome', {
waitUntil: 'domcontentloaded' });
}

/**
 * Fill the Username field identified by its id.
 */
```

```
@When('I type {string} into the Username field')
async function enterUsername(username: string) {
  const usernameField = page.locator('#username');
  await usernameField.waitFor({ state: 'visible',
timeout: 5000 });
  await usernameField.fill(username);
}

/**
 * Fill the Password field identified by its id.
 */
@When('I type {string} into the Password field')
async function enterPassword(password: string) {
  const passwordField = page.locator('#password');
  await passwordField.waitFor({ state: 'visible',
timeout: 5000 });
  await passwordField.fill(password);
}

/**
 * Click the Sign In button. The button text in the DOM
is "Sign In".
 */
@When('I click the Sign In button')
async function clickSignIn() {
  const signInButton = page.locator('button:has-
text("Sign In")');
  await signInButton.waitFor({ state: 'attached',
timeout: 5000 });
  await signInButton.click();
}
```

```
/**
 * Verify that the user is taken to the dashboard.
 * The dashboard contains a heading with the text
"Welcome" inside the element
 * with class "welcome-text". Adjust the selector if the
real app differs.
 */
@Then('I should see the account dashboard')
async function verifyDashboard() {
  const dashboardHeader = page.locator('.welcome-text
h2');
  await expect(dashboardHeader).toBeVisible({ timeout:
10000 });
  await
expect(dashboardHeader).toContainText('Welcome');
}
```