


Week 1: SLF4J logging framework

Exercise 1: Logging Error Messages and Warning Levels

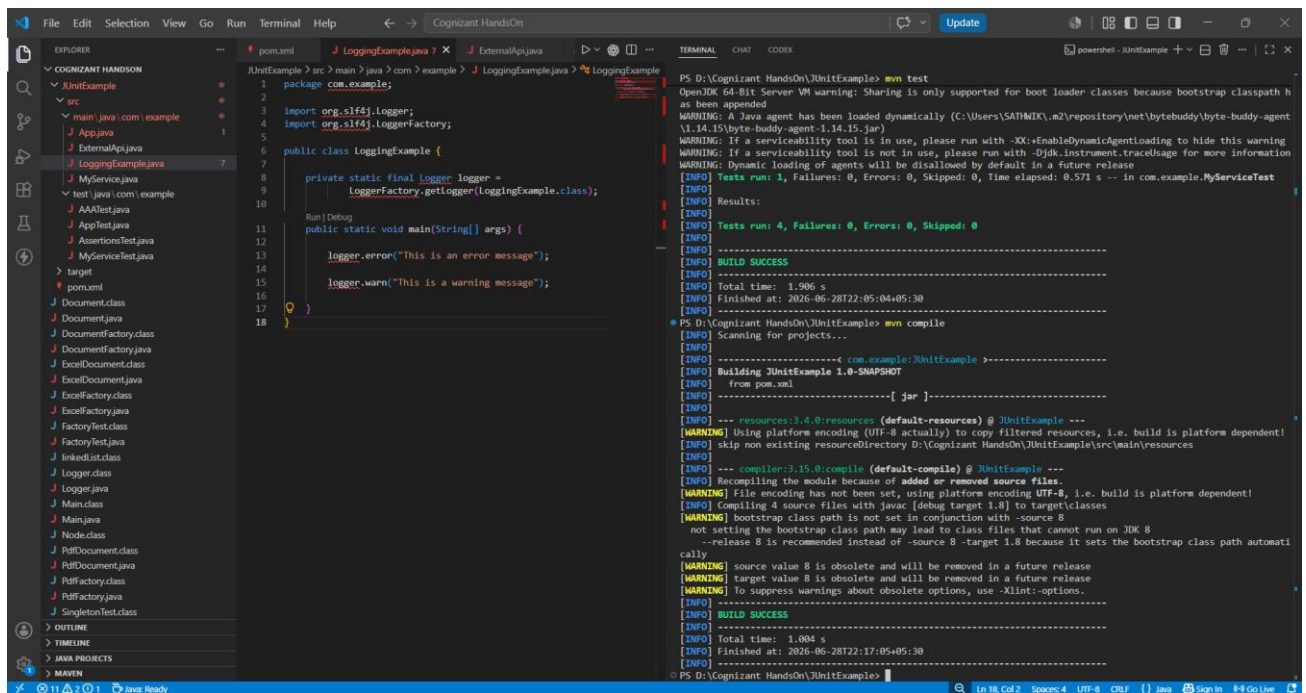

The screenshot displays an IDE with the following components:

- EXPLORER:** Shows a project structure for 'COGNIZANT HANDSON' with a package 'com.example' containing 'LoggingExample.java'.
- Source Code:** The 'LoggingExample.java' file is open, showing the following code:

```
1 package com.example;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5
6 public class LoggingExample {
7
8     private static final Logger logger =
9         LoggerFactory.getLogger(LoggingExample.class);
10
11     Run [Debug]
12     public static void main(String[] args) {
13         logger.error("This is an error message");
14         logger.warn("This is a warning message");
15     }
16 }
17
18 }
```
- TERMINAL:** Shows the execution of 'mvn test' and 'mvn compile'. The output includes warnings about the bootstrap classpath and dynamic loading of agents, followed by successful test and compile results.