


Skill 2

Kodam Sathwika

2520090210

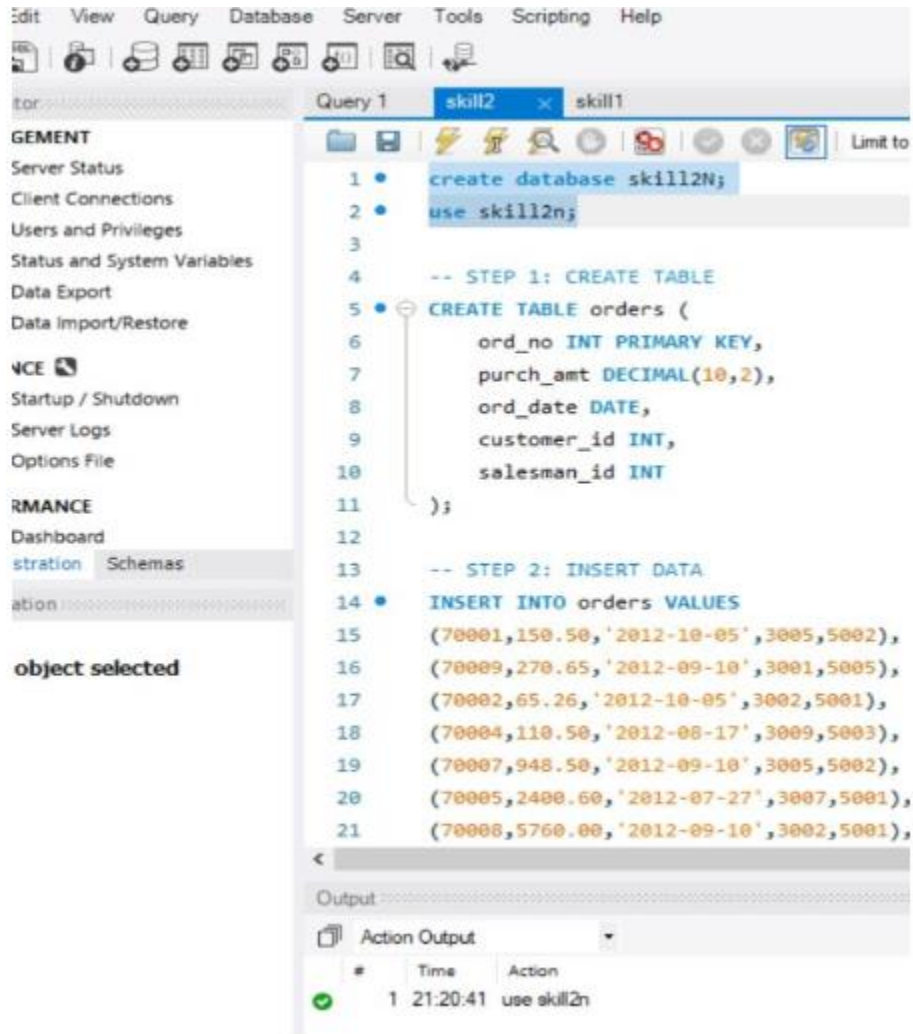

The screenshot shows the MySQL Workbench interface. The left sidebar contains a tree view with categories like 'DATABASE', 'SERVER', and 'SCHEMAS'. The main window displays a SQL query in the 'Query 1' tab. The query is as follows:

```
1 • create database skill2n;
2 • use skill2n;
3
4 -- STEP 1: CREATE TABLE
5 • CREATE TABLE orders (
6     ord_no INT PRIMARY KEY,
7     purch_amt DECIMAL(10,2),
8     ord_date DATE,
9     customer_id INT,
10    salesman_id INT
11 );
12
13 -- STEP 2: INSERT DATA
14 • INSERT INTO orders VALUES
15     (70001,150.50,'2012-10-05',3005,5002),
16     (70009,270.65,'2012-09-10',3001,5005),
17     (70002,65.26,'2012-10-05',3002,5001),
18     (70004,110.50,'2012-08-17',3009,5003),
19     (70007,948.50,'2012-09-10',3005,5002),
20     (70005,2400.60,'2012-07-27',3007,5001),
21     (70008,5760.00,'2012-09-10',3002,5001),
```

Below the query editor, the 'Output' tab is selected, showing the 'Action Output' table:

#	Time	Action
1	21:20:41	use skill2n

Edit View Query Database Server Tools Scripting Help

Query 1 skill2 skill1

Limit to 500

```
21 (70008,5760.00,'2012-09-10',3002,5001),
22 (70010,1983.43,'2012-10-10',3004,5006),
23 (70003,2480.40,'2012-10-10',3009,5003),
24 (70012,250.45,'2012-06-27',3008,5002),
25 (70011,75.29,'2012-08-17',3003,5007),
26 (70013,3045.60,'2012-04-25',3002,5001);
27
28 SELECT *
29 FROM orders
30 WHERE purch_amt > 2000;
```

Result Grid

	ord_no	purch_amt	ord_date	customer_id	salesman_id
▶	70003	2480.40	2012-10-10	3009	5003
	70005	2400.60	2012-07-27	3007	5001
	70008	5760.00	2012-09-10	3002	5001
	70013	3045.60	2012-04-25	3002	5001
•	NULL	NULL	NULL	NULL	NULL

object selected

stor.....

MANAGEMENT

Server Status

Client Connections

Users and Privileges

Status and System Variables

Data Export

Data Import/Restore

NCE

Startup / Shutdown

Server Logs

Options File

PERFORMANCE

Dashboard

Illustration

Schemas

Illustration

object selected

Query 1 skill2 skill1

Limit to 50000

30 WHERE purch_amt > 2000;

31

32 • SELECT *

33 FROM orders

34 WHERE ord_date='2012-09-10';

35

36 • SELECT *

37 FROM orders

38 WHERE salesman_id=5001;

39

Result Grid

Filter Rows:

Edit:

	ord_no	purch_amt	ord_date	customer_id	salesman_id
▶	70007	948.50	2012-09-10	3005	5002
	70008	5760.00	2012-09-10	3002	5001
	70009	270.65	2012-09-10	3001	5005
•	NULL	NULL	NULL	NULL	NULL

Menu: Edit View Query Database Server Tools Scripting Help

Toolbar: [Icons for file operations, query execution, and window management]

Query Editor Tabs: Query 1 skill2 x skill1

Query Editor Toolbar: [Icons for query execution, undo, redo, and window management] Limit to 50000

Query Editor Content:

```
36 • SELECT *
37 FROM orders
38 WHERE salesman_id=5001;
39
40 • SELECT *
41 FROM orders
42 ORDER BY purch_amt DESC;
43
44 • SELECT *
45 FROM orders
```

Left Panel:

- DB**
 - Server Status
 - Client Connections
 - Users and Privileges
 - Status and System Variables
 - Data Export
 - Data Import/Restore
- DB**
 - Startup / Shutdown
 - Server Logs
 - Options File
- DB**
 - Dashboard
 - strations Schemas

Result Grid:

	ord_no	purch_amt	ord_date	customer_id	salesman_id
▶	70007	949.50	2012-09-10	3005	5002
	70008	5760.00	2012-09-10	3002	5001
	70009	270.65	2012-09-10	3001	5005
•	HULL	HULL	HULL	HULL	HULL

object selected

File Edit View Query Database Server Tools Scripting Help

SQL Server Enterprise Edition

Query 1 skill2 skill1

Limit to 50

```
36 • SELECT *
37 FROM orders
38 WHERE salesman_id=5001;
39
40 • SELECT *
41 FROM orders
42 ORDER BY purch_amt DESC;
43
44 • SELECT *
45 FROM orders
```

Result Grid

	ord_no	purch_amt	ord_date	customer_id	salesman_id
▶	70008	5760.00	2012-09-10	3002	5001
	70013	3045.60	2012-04-25	3002	5001
	70003	2480.40	2012-10-10	3009	5003
	70005	2400.60	2012-07-27	3007	5001
	70010	1983.43	2012-10-10	3004	5006
	70007	948.50	2012-09-10	3005	5002
	70009	270.65	2012-09-10	3001	5005
	70012	250.45	2012-06-27	3008	5002
	70001	150.50	2012-10-05	3005	5002

object selected