


Backward Chaining

Sathyaseelan. C - 241001235

Program 1:

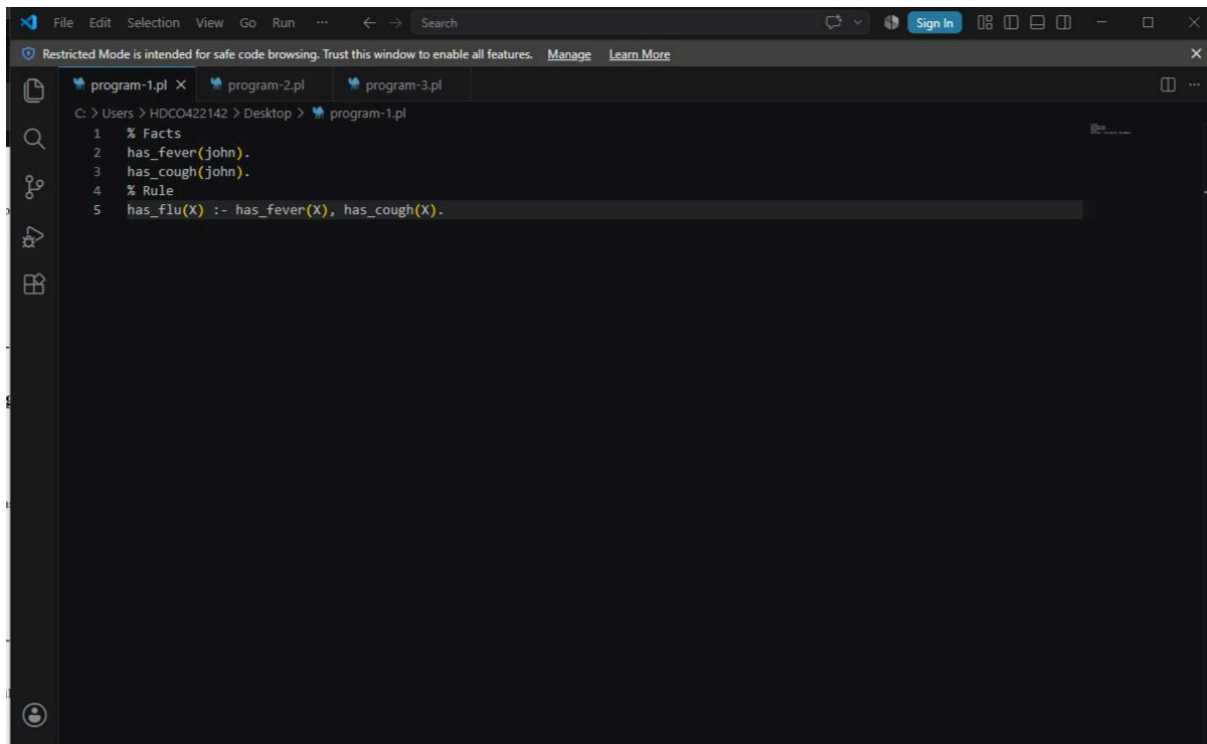


```
1 % Facts
2 has_fever(john).
3 has_cough(john).
4 % Rule
5 has_flu(X) :- has_fever(X), has_cough(X).
```

```
16 ?- consult(['c:/Users/HDC0422142/Desktop/program-1.pl']).
true.
```

```
17 ?- has_flu(john).
true.
```

Program 2:

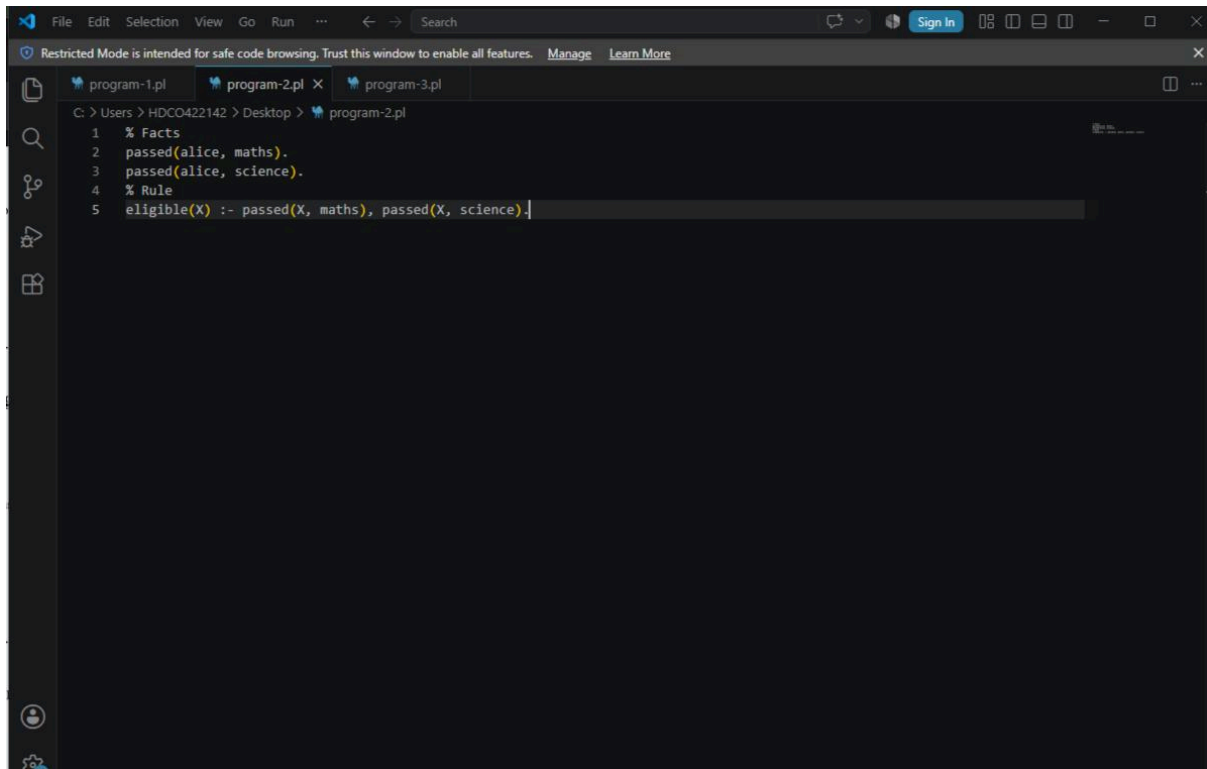


The screenshot shows a Prolog IDE window with three tabs: program-1.pl, program-2.pl (active), and program-3.pl. The active tab contains the following code:

```
C:\Users\HDCO422142\Desktop > program-2.pl
1  % Facts
2  passed(alice, maths).
3  passed(alice, science).
4  % Rule
5  eligible(X) :- passed(X, maths), passed(X, science).
```

```
18 ?- consult(['c:/Users/HDCO422142/Desktop/program-2.pl']).
true.
```

```
19 ?- eligible(alice).
true.
```

Program 3:

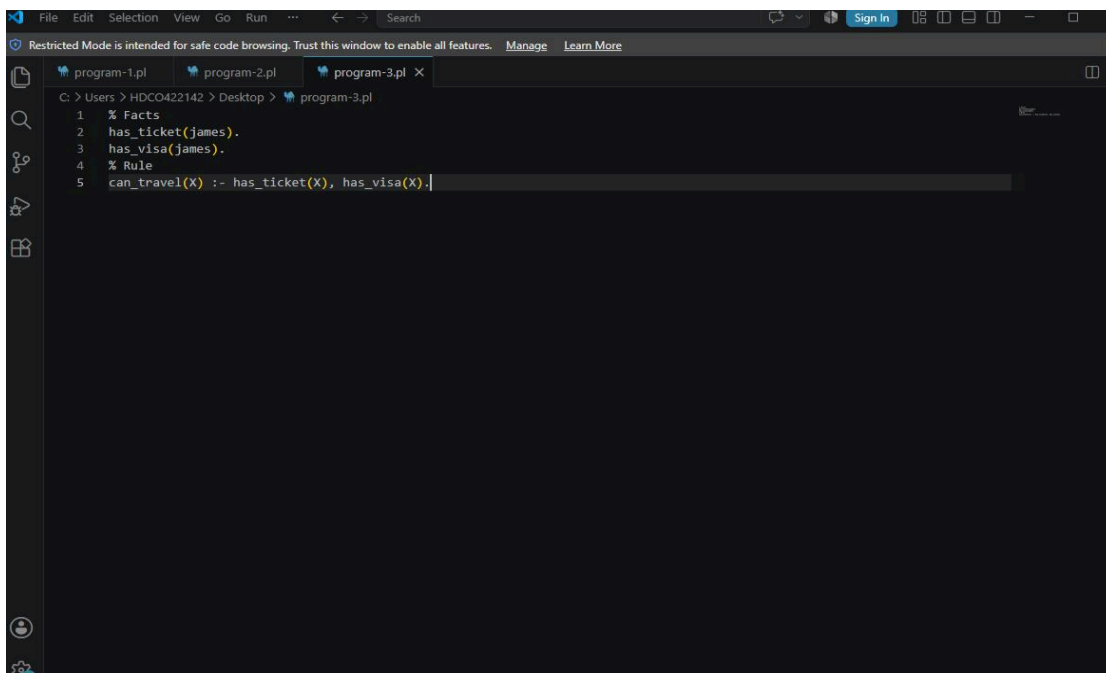

The screenshot shows a Prolog IDE window with three tabs: program-1.pl, program-2.pl, and program-3.pl (active). The active tab contains the following code:

```
C:\Users\HDCO422142\Desktop > program-3.pl
1  % Facts
2  has_ticket(james).
3  has_visa(james).
4  % Rule
5  can_travel(X) :- has_ticket(X), has_visa(X).
```

```
20 ?- consult(['c:/Users/HDC0422142/Desktop/program-3.pl']).  
true.
```

```
21 ?- can_travel(james).  
true
```