

Naive Bayes Binary Classification on Ionosphere Dataset


Problem Statement

We are tasked with implementing a binary classification module using the Ionosphere dataset. The goal is to classify the data points as either **good** or **bad**, based on radar signals, and compare two implementations: one from scratch and the other using Sklearn.

Group Members

- Satish Jhanwer (G24AIT009)
- Aditya Sharma (G24AIT011)
- Jyothsna Sravanthi (G24AIT015)

Dataset Overview

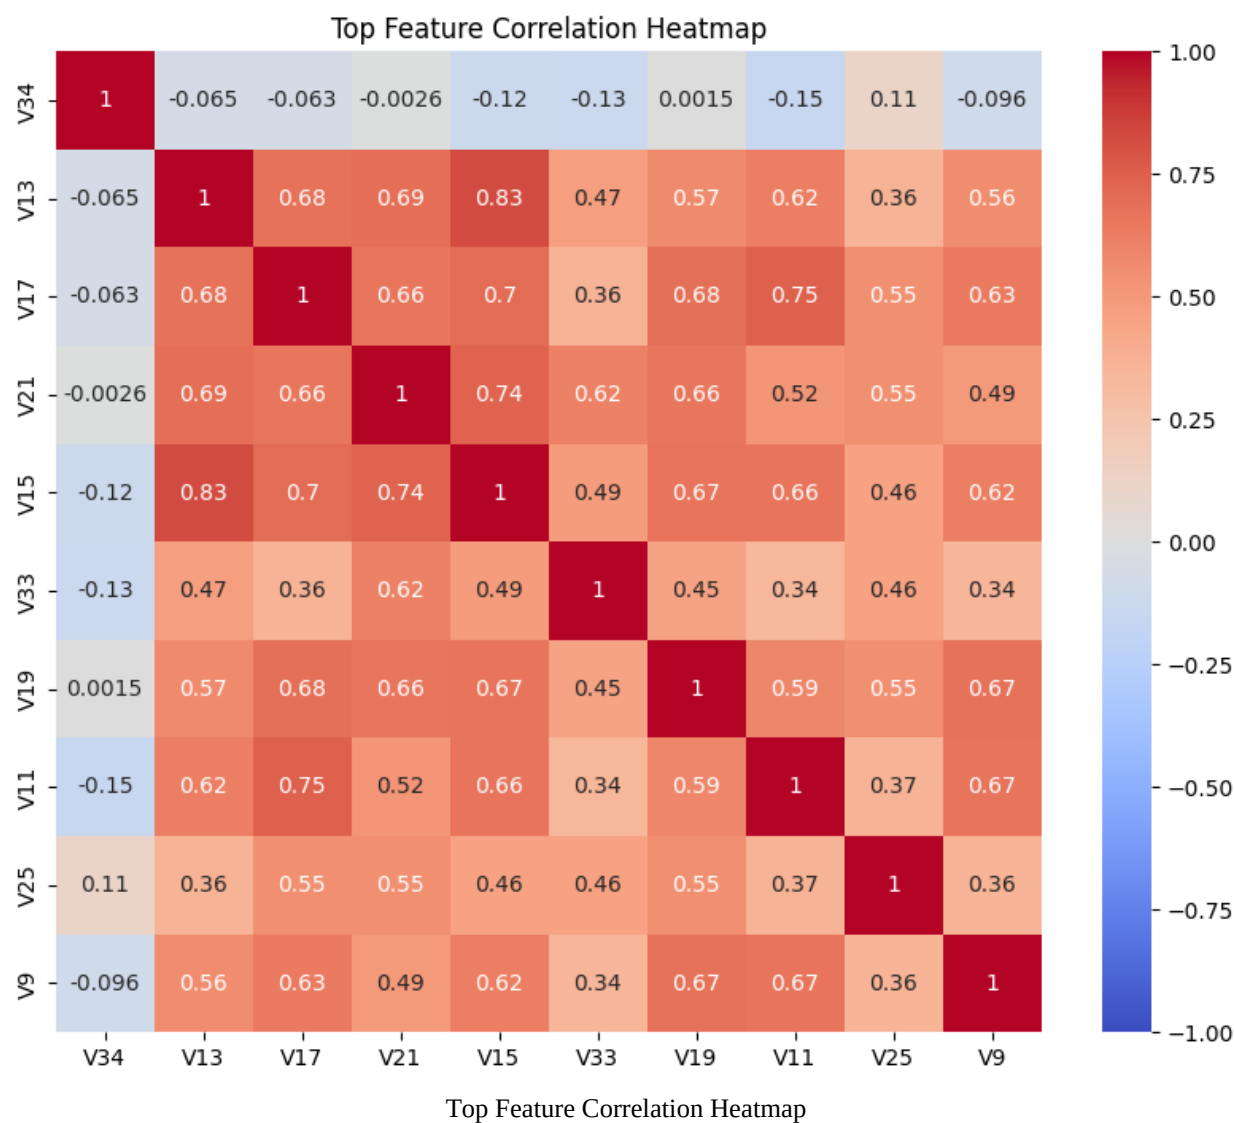

Approach

Naive Bayes from Scratch

We implemented a Gaussian Naive Bayes classifier from scratch using the following steps:

- **Calculate Mean and Variance:** For each class (good/bad), calculate the mean and variance for each feature.
- **Probability Calculation:** Compute the class-conditional probabilities using Gaussian Probability Density.
- **Posterior Calculation:** Use Bayes Theorem to compute posterior probabilities for each class and make a prediction based on the highest probability.
- **Evaluation:** Measure accuracy, precision, recall, and F1 score.

Naive Bayes Using Sklearn

We also used the GaussianNB classifier from the Sklearn library for comparison:

- **Model Training:** Trained the model using the training data split.
- **Evaluation:** Predicted on test data and calculated performance metrics.


Evaluation Metrics

The following metrics were used for performance evaluation:

- **Accuracy:** The percentage of correctly classified instances.
- **Precision:** The percentage of correct positive predictions.
- **Recall:** The percentage of actual positives correctly classified.
- **F1 Score:** The harmonic mean of precision and recall.
- **Confusion Matrix:** A matrix to visualize misclassifications.


Results

Confusion Matrix - Scratch Implementation

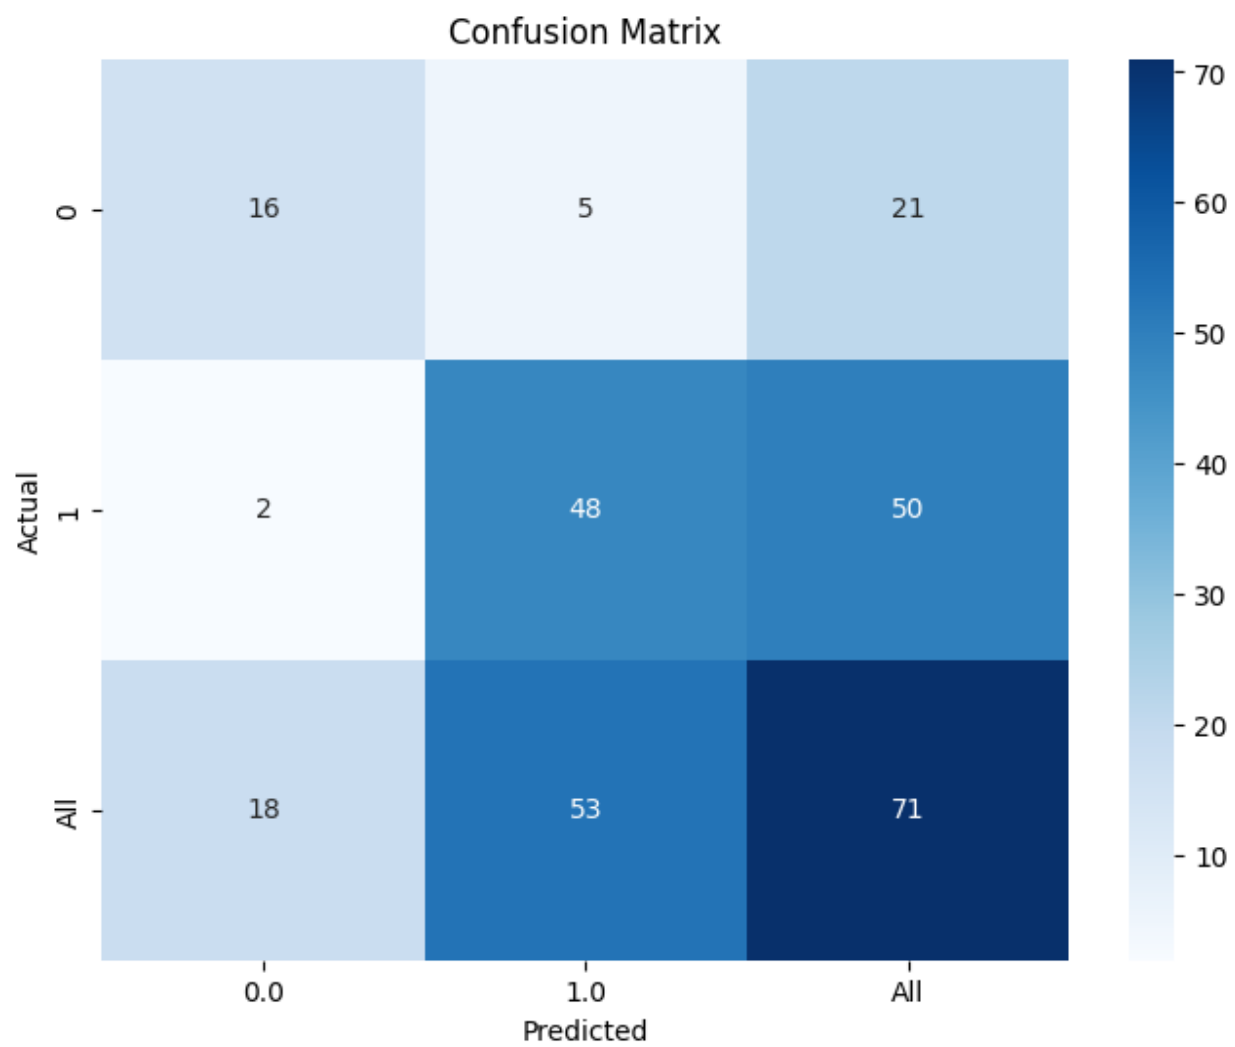


Confusion Matrix - Scratch

Confusion Matrix - Sklearn Implementation

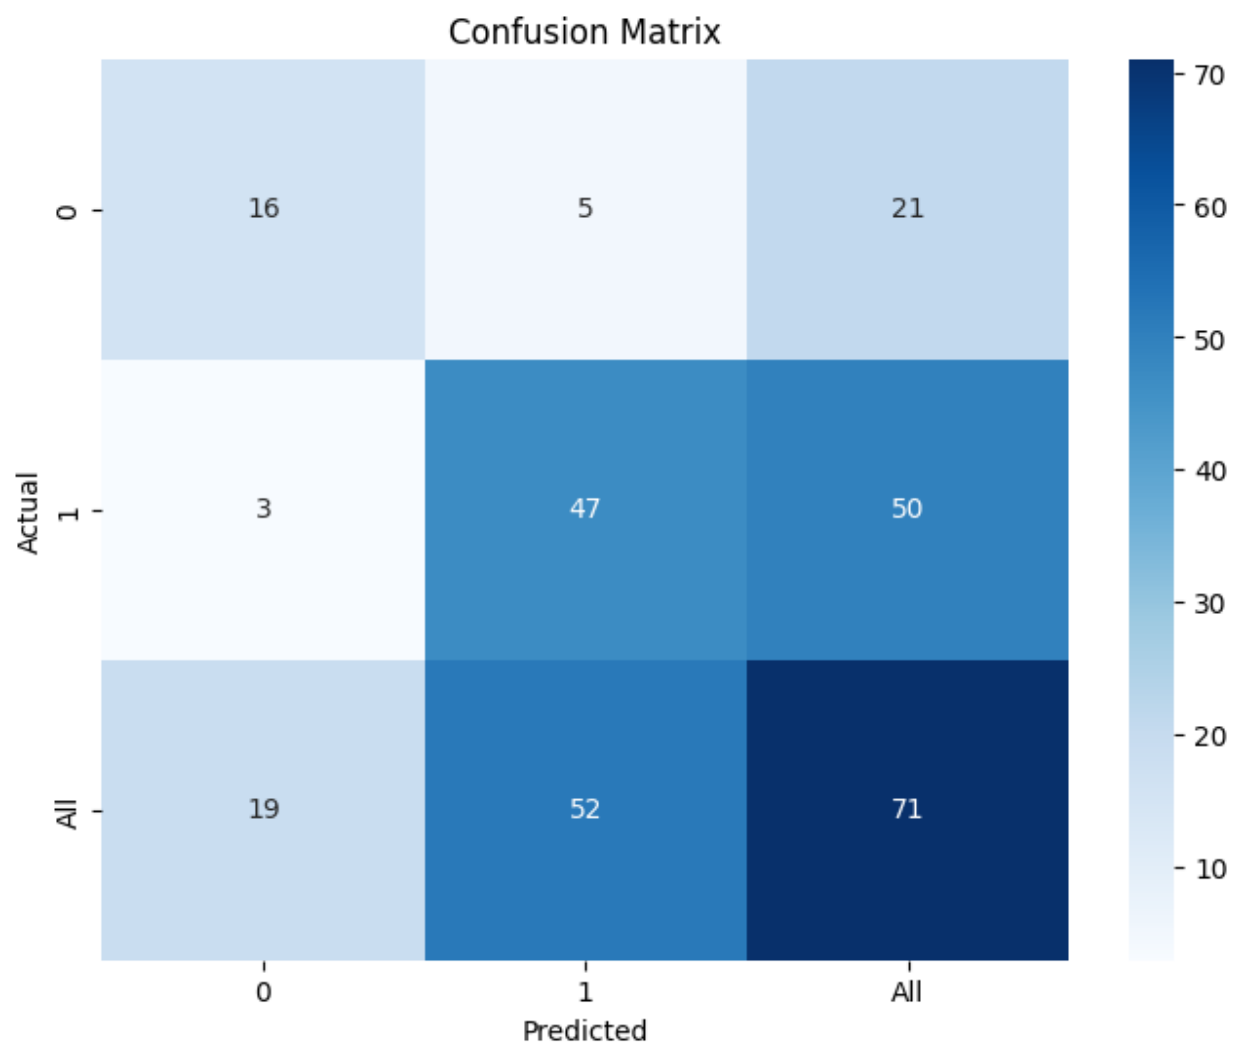

Confusion Matrix - Sklearn

Overall Result

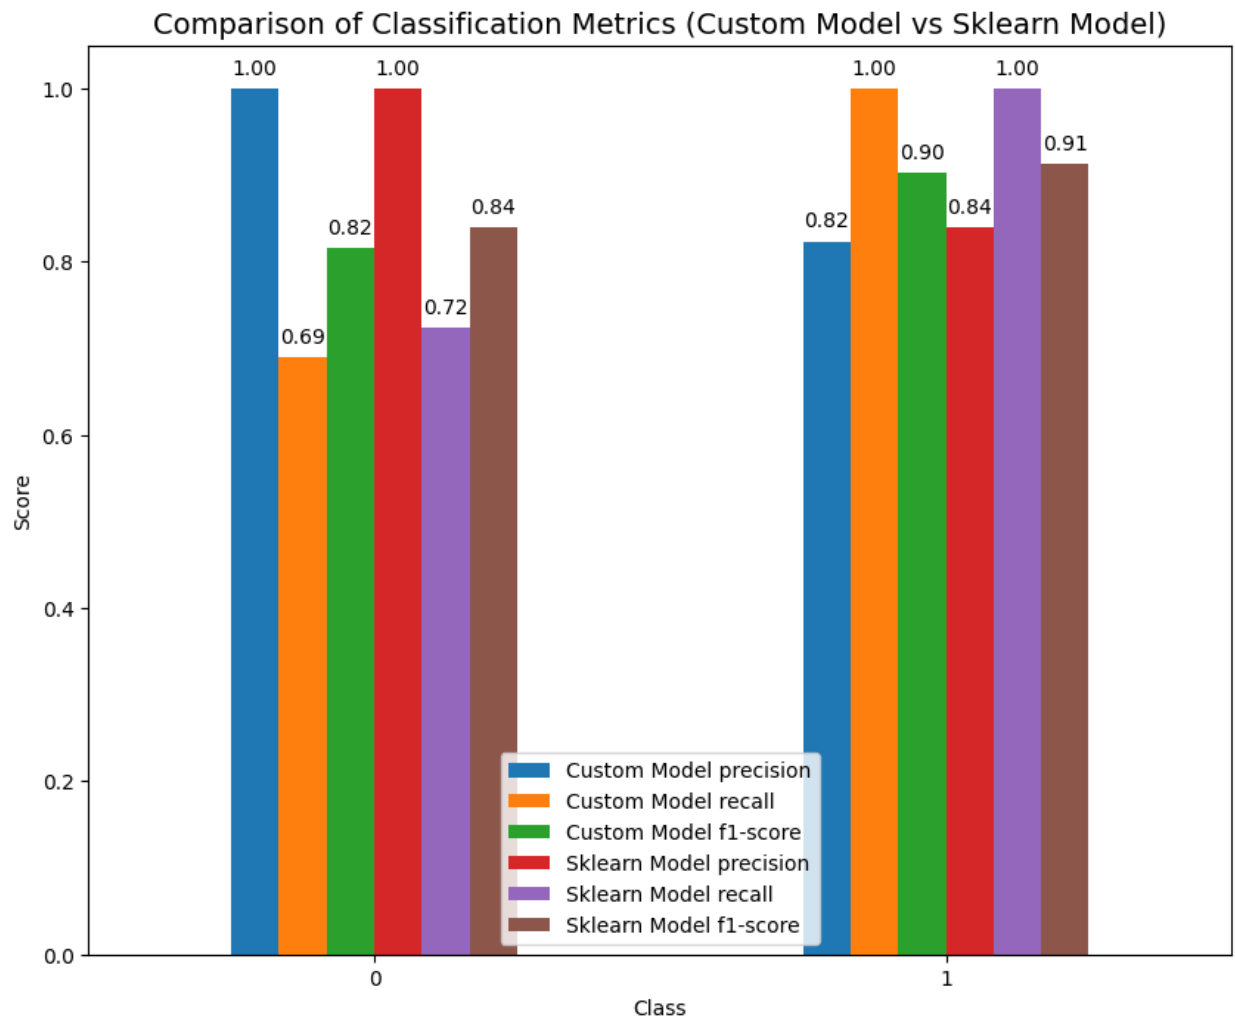

Classification Comparison Report

Accuracy & Time Comparison

- Accuracy for Naive Bayes from Scratch: 0.873239
- Time for Naive Bayes from Scratch: 0.011543 seconds
- Accuracy for Sklearn Naive Bayes: 0.887324
- Time for Sklearn Naive Bayes: 0.002260 seconds

Conclusion

The Sklearn implementation is faster and more accurate, benefiting from optimized underlying libraries. However, our custom implementation gives insight into how Naive Bayes works at the foundational level.