

XenithPay (WeselAja Escrow) Integration Documentation

Overview

Dokumen ini menjelaskan integrasi XenithPay untuk kebutuhan pembayaran masuk (Pay In), webhook notifikasi, serta pencairan dana (Pay Out) pada platform marketplace/escrow.

Authentication

Authentication Method

XenithPay menggunakan:

HMAC SHA256 + Base64 Signature Authentication

Setiap request wajib menyertakan:

Xenith-API-Key
Xenith-Request-Timestamp
Xenith-Request-Signature

Required Headers

Content-Type: application/json
Xenith-API-Key: <ACCESS_KEY>
Xenith-Request-Timestamp: <RFC3339_TIMESTAMP>
Xenith-Request-Signature: <SIGNATURE>

Contoh:

Content-Type: application/json
Xenith-API-Key: ak_XXXXXXXXXX
Xenith-Request-Timestamp: 2025-06-24T10:00:00Z
Xenith-Request-Signature: TC5Zz0Hq7XkxPiFpByQcmmPQ2tq4DQjvC8r2wZHwo04=

Environment

Sandbox

`https://openapi.sandbox.xenithpay.com`

Production

Contact XenithPay Support

Request Signature

Signature Payload Format

Gabungkan:

```
HTTP_METHOD
URI_PATH
TIMESTAMP
REQUEST_BODY
```

dipisahkan newline (`\n`).

Contoh:

```
POST
/v1/payins
2025-06-24T10:00:00Z
{"initiatedAmount":100000}
```

Signature Algorithm

```
signature =
Base64(
  HMAC_SHA256(
    signaturePayload,
    secretKey
```

```
)  
)
```

PHP Example

```
$payload =  
    $method . "\n" .  
    $uri . "\n" .  
    $timestamp . "\n" .  
    $body;  
  
$signature = base64_encode(  
    hash_hmac(  
        'sha256',  
        $payload,  
        $secretKey,  
        true  
    )  
);
```

Pay In (Receive Money)

Create Pay In

Endpoint

```
POST /v1/payins
```

Purpose

Membuat transaksi pembayaran untuk customer.

Request Example

```
{  
  "initiatedAmount": 100000,  
  "currency": "IDR",  
  "paymentMethod": "VIRTUAL_ACCOUNT",  
  "customerReference": "ORDER-001",  
  "customerName": "John Doe",  
  "description": "Project Payment",  
  "callbackUrl": "https://domain.com/webhooks/xenith/payin",  
}
```

```
"redirectUrl": "https://domain.com/payment-success"
}
```

Response

```
{
  "id": "payin-840-01KC6B",
  "referenceCode": "6c749958",
  "paymentCode": "1308300301295957",
  "paymentCodeType": "ACCOUNT_NUMBER",
  "status": "PENDING"
}
```

Important Fields

Field	Description
id	Xenith Transaction ID
referenceCode	Merchant Reference
paymentCode	VA / QRIS / Payment Link
paymentCodeType	ACCOUNT_NUMBER / PAYMENT_LINK
status	PENDING / SUCCESS / FAILED / EXPIRED

Get Pay In Detail

Endpoint

```
GET /v1/payins/{transactionId}
```

Example

```
GET /v1/payins/payin-840-01KC6B
```

Status Values

PENDING
SUCCESS
FAILED

EXPIRED
REFUNDED

Pay In Webhook

Callback URL

Webhook dikirim ke:

callbackUrl

yang didaftarkan saat Create Pay In.

Payload Example

```
{
  "schemaVersion": "1.0.1",
  "timestamp": "2024-11-29T10:05:01.530805501Z",
  "data": {
    "id": "pymt-01JDVNTTEZWNMVJYXSZEZR86G6",
    "referenceCode": "6c7d9958",
    "customerReference": "ORDER-001",
    "status": "SUCCESS"
  }
}
```

Webhook Business Logic

SUCCESS → Activate Order
FAILED → Mark Failed
EXPIRED → Mark Expired
REFUNDED → Mark Refunded

Webhook Security

Headers

```
X-Xenith-Timestamp  
X-Xenith-Signature
```

Verification Payload

```
HTTP_METHOD  
URL_PATH  
REQUEST_BODY  
TIMESTAMP
```

Contoh:

```
POST  
/api/webhooks/xenith  
{JSON_BODY}  
2024-11-29T10:05:01.530805501Z
```

Verification Formula

```
Base64(  
  HMAC_SHA256(  
    payload,  
    webhookSecret  
  )  
)
```

Bandingkan dengan:

```
X-Xenith-Signature
```

Replay Attack Protection

Tolak request jika timestamp lebih dari 5 menit.

Pay Out (Disbursement)

Create Pay Out

Endpoint

`POST /v1/payouts`

Additional Header

`X-Idempotency-Key`

Harus unik untuk setiap payout.

Request Example

```
{
  "initiatedAmount": 100000,
  "currency": "IDR",
  "destinationPayoutMethod": "BANK_TRANSFER",
  "destinationPayoutChannel": "CENAIDJA",
  "destinationPayoutAccount": "1234567890",
  "destinationPayoutAccountName": "Freelancer Name",
  "referenceCode": "PAYOUT-001",
  "customerReference": "WD-001",
  "description": "Freelancer Withdrawal",
  "callbackUrl": "https://domain.com/webhooks/xenith/payout"
}
```

Response Example

```
{
  "id": "payout-704-01KC...",
  "status": "PENDING"
}
```

Get Pay Out Detail

Endpoint

```
GET /v1/payouts/{transactionId}
```

Pay Out Webhook

Payload Example

```
{
  "schemaVersion": "1.0.1",
  "timestamp": "2024-11-30T06:54:08.556274303Z",
  "data": {
    "id": "payout-01IDX...",
    "customerReference": "WD-001",
    "status": "SUCCESS"
  }
}
```

Business Logic

PENDING → Processing
SUCCESS → Paid
FAILED → Failed

Database Design

Table: payments

```
CREATE TABLE payments (
  id BIGINT PRIMARY KEY AUTO_INCREMENT,

  invoice_number VARCHAR(100),

  xenith_payin_id VARCHAR(255),
  reference_code VARCHAR(255),
  customer_reference VARCHAR(255),
```



```

amount DECIMAL(18,2),
payment_amount DECIMAL(18,2),
fee_amount DECIMAL(18,2),

payment_method VARCHAR(100),
payment_channel VARCHAR(100),
payment_code VARCHAR(255),
payment_code_type VARCHAR(100),

status VARCHAR(50),

created_time TIMESTAMP NULL,
updated_time TIMESTAMP NULL,
expiration_time TIMESTAMP NULL,

created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
updated_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);

```

Table: payouts

```

CREATE TABLE payouts (
  id BIGINT PRIMARY KEY AUTO_INCREMENT,

  xenith_payout_id VARCHAR(255),

  withdrawal_id VARCHAR(100),

  amount DECIMAL(18,2),
  fee_amount DECIMAL(18,2),

  destination_account VARCHAR(255),
  destination_account_name VARCHAR(255),

  reference_code VARCHAR(255),
  customer_reference VARCHAR(255),


  status VARCHAR(50),

  created_time TIMESTAMP NULL,
  updated_time TIMESTAMP NULL,

  created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
  updated_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);

```

Marketplace Escrow Flow

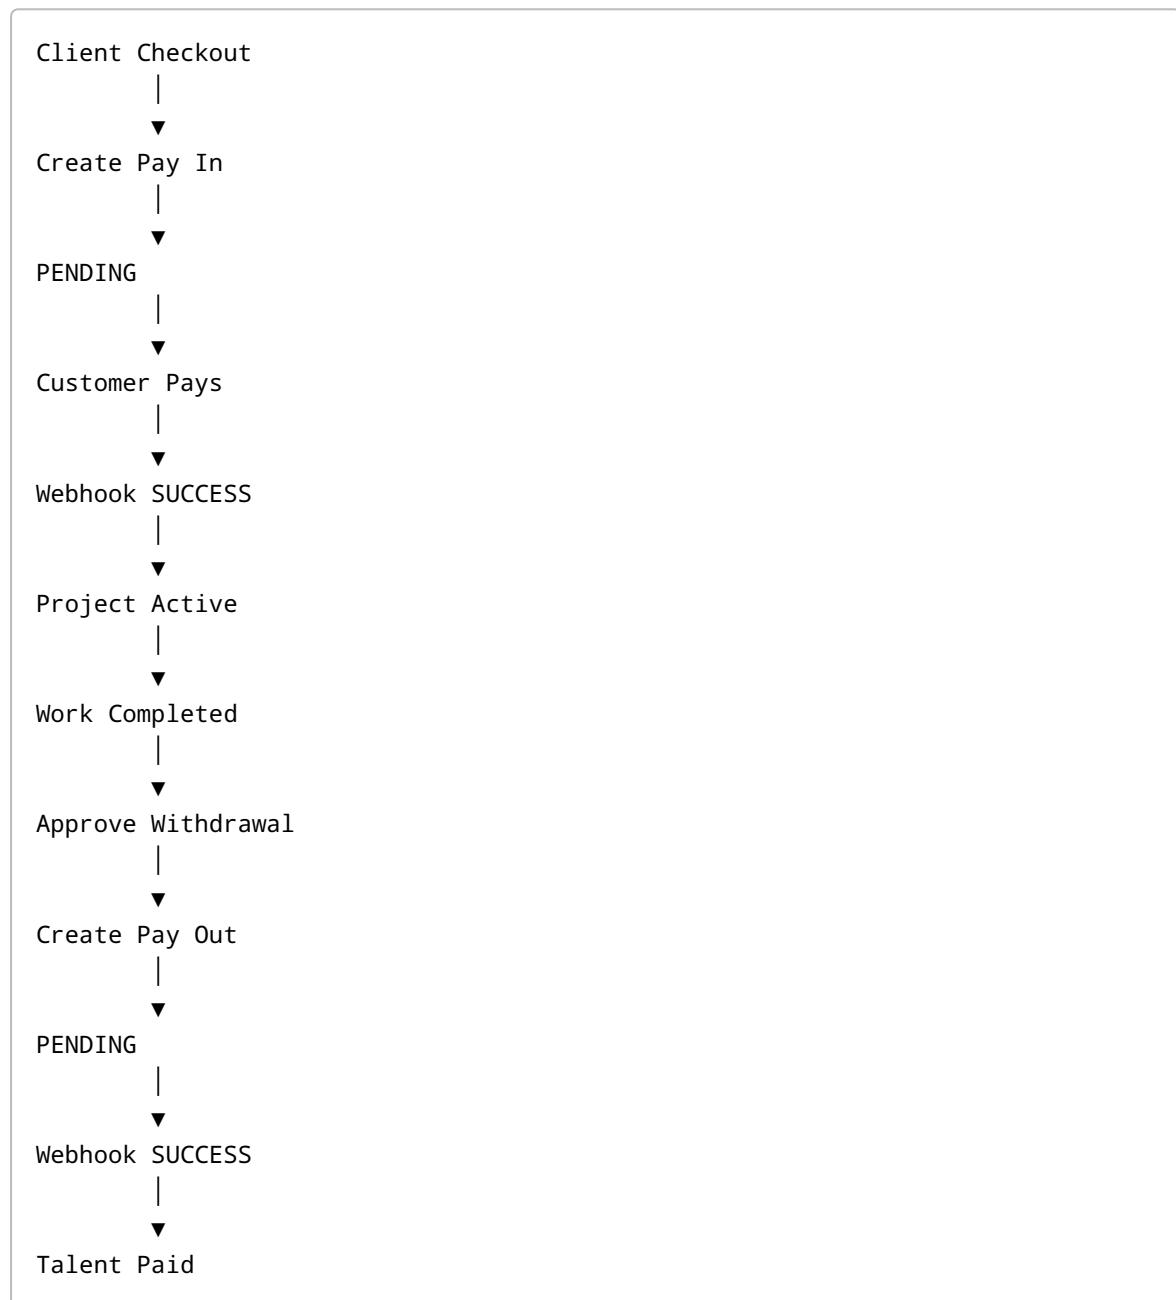

Answers to Initial Questions

Authentication

Uses:

Xenith-API-Key
Xenith-Request-Timestamp
Xenith-Request-Signature

Authentication is HMAC SHA256 + Base64.

Sandbox URL

`https://openapi.sandbox.xenithpay.com`

Create Escrow (Equivalent)

Xenith uses:

`POST /v1/payins`

instead of a dedicated escrow endpoint.

Store:

```
{  
  "id": "payin-xxxx"  
}
```

as transaction identifier.

Release Funds

Uses:

`POST /v1/payouts`

Store:

```
{  
  "id": "payout-xxxx"  
}
```

as payout identifier.

Webhooks

Supported.

Pay In Webhook

SUCCESS
FAILED
EXPIRED
REFUNDED

Pay Out Webhook

SUCCESS
FAILED
PENDING

Webhook signatures must be verified using HMAC SHA256 + Base64.