



✓ ✓ ✓ ✓ Event Bubbling, Capturing & Delegation

Event propagation

→ When an event occurs on an element it travels through the DOM

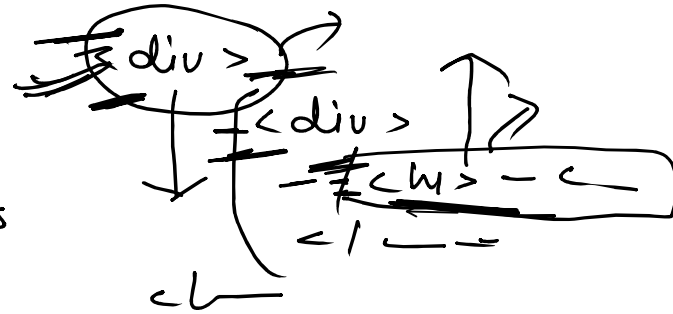


Capturing ✓

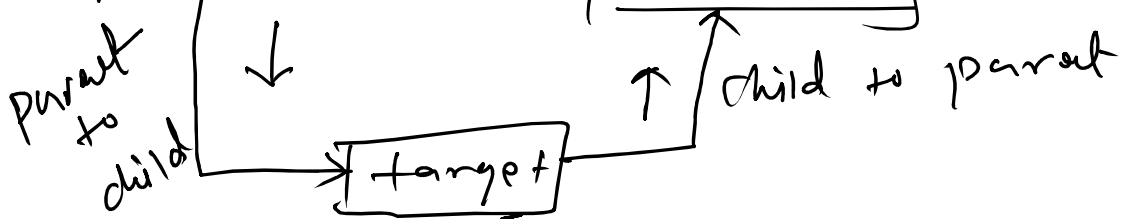

Event Bubbling → child to parent

→ In bubbling the event ~~ac~~ moves from target elements upward to its parent.

Event Delegation →

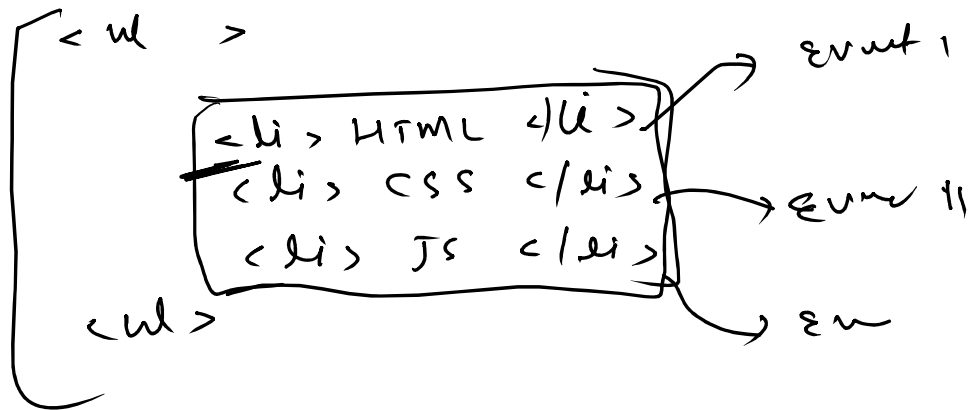

It means adding one event listener to a parent instead of adding separate listeners to every child

```
// event bubbling -> child to parent
// const parent = document.querySelector("#parent")
// const child = document.querySelector("#child")
// parent.addEventListener("click", () => {
//   console.log("Parent wala")
// })
// child.addEventListener("click", () => {
//   console.log("Child wala")
// })
```

```
// stopPropagation() - stops a event from bubbling up to parent
// const parent = document.querySelector("#parent")
// const child = document.querySelector("#child")
// parent.addEventListener("click", () => {
//   console.log("Parent wala")
// })
// child.addEventListener("click", (event) => {
//   event.stopPropagation()
//   console.log("Child wala")
// })
```

```
// event capturing -> parent to child
// third arguments pass as true
// const parent = document.querySelector("#parent")
// const child = document.querySelector("#child")
// parent.addEventListener("click", () => {
//   console.log("Parent wala")
// }, true)
```

```
// child.addEventListener("click", () => {
//   console.log("Child wala")
// }, true)
```

```
// event delegation
const parent = document.querySelector("#parentUI")
parent.addEventListener("click", (event) => {
  console.log(event.target.textContent)
})
```

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>DOM Practice</title>
</head>
<body>
  <div id="parent">
    <button id="child">Click</button>
  </div>

  <ul id="parentUI">
    <li>HTML</li>
    <li>CSS</li>
    <li>JS</li>
  </ul>

  <script src="./script.js"></script>
</body>
</html>
```