FLEET

BUILDING THE FUTURE TOGETHER

PRODUCT CATALOGUE

FLEET INDUSTRIES PRIVATE LIMITED



FL12A



FL50A

BEST SELLER



FL-114A



HB-50



FL-315H4

Building the future together – with unmatched quality and dedicated service

PHONE / WHATSAPP

+91 83830 36046 · +91 89015 84802

EMAIL

sales@fleetindustries.co.in · info@fleetindustries.co.in

CONTENTS

About us · machines · tools · spare parts

About Us		3
Pipe Threading Machines	12 items	4
Roll Grooving Machine	6 items	10
Pipe Cutting Machine	4 items	13
Hole Saw Cutting Machines	5 items	15
Pressure Test Pumps	3 items	17
Butt Jointing Machine	12 items	18
Pipe Bending Machines	5 items	24
Spare Parts	32 items	27

We bring together technology and engineering to deliver innovative solutions in pipe machinery — products designed to make your job easy.

FLEET INDUSTRIES PRIVATE LIMITED brings together technology and engineering to provide innovative solutions for our customers in the range of pipe machinery. Our priority is to design and deliver products and solutions that make your job easy.

Our company has grown to become one of the leading companies, with many customers around the globe. Today, we are committed to helping our customers succeed and to building long-term value in the global market.

We use German cutting-edge technology in pipe threading machines, pipe grooving machines, hole saw cutting machines, HDPE butt fusion machines, pipe cutting machines, pipe benders, pressure testing pumps and more.

Through our sound logistics facility, we ensure on-time delivery of orders to the client's destination.

WHAT WE STAND FOR

Reliable Engineering
Machines designed for dependable, day-to-day performance.

Precision Engineering
Careful engineering for accurate, repeatable results.

Durable Equipment
Built to stand up to demanding industrial conditions.

Technical Support
Our team helps you choose and use the right machine.

WHAT WE OFFER

- Pipe Threading Machines
- Roll Grooving Machine
- Pipe Cutting Machine
- Hole Saw Cutting Machines
- Pressure Test Pumps
- Butt Jointing Machine
- Pipe Bending Machines
- Spare Parts

FL50A

PIPE THREADING

FL50A Heavy-Duty Pipe Threading Machine

½" – 2"

Heavy-duty 2" threading machine with a 1000 W induction motor.

MODEL	FL50A
Capacity	½" – 2"
Motor	1000 W (induction)
Voltage	220–240 V, 50 Hz
Speed	30 RPM
Weight	58 kg
Standard accessories	One set ½"–¾" SS dies, one set 1"–2" SS dies, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 2"
- 1000 W induction motor
- Supplied with SS dies, die head, oil and stand

FL50A



FL50A1

PIPE THREADING

FL50A1 Pipe Threading Machine

½" – 2"

FL50A1



2" threading machine with a 900 W motor.

MODEL	FL50A1
Capacity	½" – 2"
Motor	900 W
Voltage	220–240 V, 50 Hz
Speed	28 RPM
Weight	53 kg
Standard accessories	One set ½"–¾" alloy dies, one set 1"–2" alloy dies, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 2"
- 900 W motor
- Supplied with dies, die head, oil and stand

FL50B1

PIPE THREADING

FL50B1 Heavy-Duty Auto-Cut Pipe Threading Machine

½" – 2"

Heavy-duty 2" auto-cut threading machine with a 1000 W induction motor.

MODEL	FL50B1
Capacity	½" – 2"
Motor	1000 W (induction)
Voltage	220–240 V, 50 Hz
Speed	30 RPM
Weight	58 kg
Standard accessories	One set ½"–¾" SS dies, one set 1"–2" SS dies, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 2"
- Auto-cut
- 1000 W induction motor
- Supplied with SS dies, die head, oil and stand

FL50B1



FL100A

PIPE THREADING

FL100A Heavy-Duty Pipe Threading Machine

½" – 4"

FL100A



Heavy-duty 4" threading machine with a 1300 W induction motor.

MODEL	FL100A
Capacity	½" – 4"
Motor	1300 W (induction)
Voltage	220–240 V, 50 Hz
Speed	30 / 14 RPM
Weight	130 kg
Standard accessories	One set ½"–¾" SS dies, one set 1"–2" SS dies, one set 2½"–4" SS dies, one 2½"–4" die head, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 4"
- 1300 W induction motor
- Two-speed operation (30 / 14 RPM)
- Supplied with dies, two die heads, oil and stand

FL100A1

PIPE THREADING
FL100A1 Pipe Threading Machine

½" – 4"

4" threading machine with a 1100 W motor.

MODEL	FL100A1
Capacity	½" – 4"
Motor	1100 W
Voltage	220–240 V, 50 Hz
Speed	24 / 9 RPM
Weight	130 kg
Standard accessories	One set ½"–¾" alloy dies, one set 1"–2" alloy dies, one set 2½"–4" alloy dies, one 2½"–4" die head, one ½"–2" die head, 2 L oil, stand

- Threads pipe from ½" to 4"
- 1100 W motor
- Two-speed operation (24 / 9 RPM)
- Supplied with alloy dies, two die heads, oil and stand

FL100A1



FL150A

PIPE THREADING
FL150A Pipe Threading Machine

2½" – 6"

FL150A



6" threading machine for pipe from 2½" to 6".

MODEL	FL150A
Capacity	2½" – 6"
Motor	1100 W
Voltage	380 V
Speed	18 / 6 RPM
Weight	230 kg
Standard accessories	One set 2½"–4" dies, one set 5"–6" dies, one 2½"–4" die head, one 5"–6" die head, 2 L threading oil, 4-leg stand

- Threads pipe from 2½" to 6"
- 1100 W motor
- Two-speed operation (18 / 6 RPM)
- Supplied with dies, two die heads, oil and 4-leg stand

FL-P20

PIPE THREADING

FL-P20 Portable Pipe Threader

½" – 2"



MODEL	FL-P20
Capacity	½" – 2"
Motor	2000 W
Voltage	220–240 V, 50 Hz
Speed	26 RPM
Weight	20 kg
Standard accessories	Die heads (½", ¾", 1", 1¼", 1½", 2"), oil gun, gloves, L key, screwdriver, fix holder, carbon brush, cleaning brush

FL-P14

PIPE THREADING

FL-P14 Portable Pipe Threader

½" – 1¼"



Portable pipe threader, 1400 W, for pipe up to 1¼".

MODEL	FL-P14
Capacity	½" – 1¼"
Motor	1400 W
Voltage	220–240 V, 50 Hz
Speed	26 RPM
Weight	20 kg
Standard accessories	Die heads (½", ¾", 1½", 2"), oil gun, gloves, L key, screwdriver, fix holder, cleaning brush

- Threads pipe from ½" to 1¼"
- 1400 W motor
- Portable at 20 kg
- Supplied with die heads and tools

FL-50S

PIPE THREADING

FL-50S (1800 W) Pipe Threading Machine

½" – 2"

Pipe threading machine for ½"–2" pipe with a 1800 W universal motor and heavy-duty gearbox.

MODEL	FL-50S
HSN code	8459
Size	½" – 2"
Speed	40 RPM
Motor	1800 W
Gross weight	81 kg
Standard equipment	Die head ½"–2" (1 set); dies ½"–¾" (1 set, BSPT) and 1"–2" (1 set, BSPT)

- Threads pipe from ½" to 2"
- 1800 W universal motor with heavy-duty gearbox
- Ergonomic design for ease of handling
- Die head and BSPT dies supplied

FL-50S



FL-R65

PIPE THREADING

FL-R65 Pipe Threading Machine

½" – 2" – 2½"

FL-R65



Electric pipe threading machine, 1300 W, ½"–2½".

MODEL	FL-R65
Size	½" – 2" – 2½"
Power	1300 W
Voltage	220 V
Speed	28–36 RPM
Weight	75 / 80 kg
Packing size	65 × 41 × 52 cm
Accessories	Dies ½"–¾", 1"–2", 2½"; 2 Ltr oil; screwdriver; 3 legs

- Threads pipe from ½" to 2½"
- 1300 W motor, 220 V
- Speed 28–36 RPM
- Supplied with dies, 2 Ltr oil, screwdriver and 3 legs

FL-R25

PIPE THREADING

FL-R25 Manual Ratchet Pipe Threader

Small portable manual ratchet pipe threader for ½"–1" pipe.

MODEL	FL-R25
Type	**Manual ratchet pipe threader**
Available sizes	**½", ¾", 1"**
Die head	**½", ¾", 1" (BSPT / NPT)**
Weight	**Approx. 5 kg**

- Compact and lightweight design
- Effortless operation in tight spaces
- Die heads ½", ¾" and 1" (BSPT / NPT)
- Supplied in a carry case

FL-R25



FL-R50

PIPE THREADING

FL-R50 Manual Ratchet Pipe Threader

FL-R50



Small portable manual ratchet pipe threader for ½"–2" pipe.

MODEL	FL-R50
Type	**Manual ratchet pipe threader**
Available sizes	**½", ¾", 1", 1¼", 1½", 2"**
Die head	**½", ¾", 1", 1¼", 1½", 2" (BSPT / NPT)**
Weight	**Approx. 12 kg**

- Compact and lightweight design
- Effortless operation in tight spaces
- Die heads ½", ¾", 1", 1¼", 1½" and 2" (BSPT / NPT)
- Supplied in a carry case

FL9A

ROLL GROOVING

FL9A Electric Hydraulic Roll Grooving Machine (1"–8")

1"–8"

FL9A



Electric hydraulic roll grooving machine for 1"–8" steel pipe.

MODEL	FL9A
Fabrication capacity	1" – 8" (DN25–DN200, Ø33–Ø219) Sch.10/40 steel pipe
Max. wall thickness	8 mm
Output speed	23 RPM
Drive unit	800 W, 220 V, 50/60 Hz, single phase
Gross weight	98 kg
Packing size	73 × 40 × 77 cm
Standard accessories	Drive rollers 1"–1½", 2"–6", 8"; groove rollers 1"–1½", 2"–6", 8"; pipe stand for 1"–8"
Optional accessories	Foot switch

- Grooves 1"–8" Sch.10/40 steel pipe
- 800 W drive unit with hydraulic feeding pump
- Foot switch and pipe stand
- Drive and groove rollers for each size range

FL9A1

ROLL GROOVING

FL9A1 Electric Hydraulic Roll Grooving Machine (1"–8")

1"–8"

Electric hydraulic roll grooving machine for 1"–8" steel pipe.

MODEL	FL9A1
Fabrication capacity	1" – 8" (DN25–DN200, Ø33–Ø219) Sch.10/40 steel pipe
Max. wall thickness	8 mm
Output speed	23 RPM
Motor power	750 W
Voltage	250 V
Frequency	50/60 Hz
Gross weight	98 kg
Packing size	73 × 40 × 77 cm
Standard accessories	Pipe support stand; knurling wheels 1"–1½", 2"–3", 3"–6", 8"; pinch rollers 1"–1½", 2"–6", 8"

FL9A1



FL12A

ROLL GROOVING

FL12A Electric Hydraulic Roll Grooving Machine (2"–12")

2"–12"

FL12A



Electric hydraulic roll grooving machine for 2"–12" steel pipe.

MODEL	FL12A
Capacity	2"–6" for schedule 40; 8"–12" for schedule 10
Motor	1100 W
Voltage	220–240 V, 50 Hz
Speed	24 RPM
Standard accessories	Pipe support stand; upper rollers 2"–6", 8"–12"; knurling wheels 2"–3", 4"–6", 8"–12"

- Grooves 2"–12" steel pipe
- 1100 W motor
- Pipe support stand included
- Upper rollers and knurling wheels for each size range

FL12A1

ROLL GROOVING

FL12A1 Electric Hydraulic Roll Grooving Machine (2"–12")

2"–12"

Electric hydraulic roll grooving machine for 2"–12" steel pipe.

MODEL	FL12A1
Size	2" – 12"
Power	1100 W
Voltage	220 V
Weight	115 / 125 kg
Packing size	81 × 41 × 80 cm
Accessories	Knurling roller 60–76 mm / 89–165 mm / 219–325 mm; pinch roller 60–76 mm / 89–165 mm / 219–325 mm

- Grooves 2"–12" steel pipe
- 1100 W motor
- Foot switch and pipe support stand
- Knurling and pinch rollers for each size range

FL12A1



FL12P

ROLL GROOVING

FL12P Premium Electric Hydraulic Roll Grooving Machine (1"–12")

1"–12"

FL12P



Premium electric hydraulic roll grooving machine for 1"–12" steel pipe.

MODEL	FL12P
Fabrication capacity	1" – 8" (DN25–DN200, Ø33–Ø219) Sch.10/40 steel pipe; 10" – 12" (DN250–DN300, Ø254–Ø325) Sch.10/20 steel pipe
Max. wall thickness	8 mm
Output speed	23 RPM
Drive unit	1100 W, 220 V (110 V available), 50/60 Hz, single phase
Gross weight	118 kg
Packing size	75 × 40 × 70 cm
Standard accessories	Drive rollers 1"–1½", 2"–3", 3½"–6", 8"–12"; groove rollers 1"–1½", 2"–6", 8"–12"; pipe stand for 1"–12"; foot switch

- Grooves 1"–12" steel pipe
- 1100 W drive unit with hydraulic feeding pump
- Groove depth lock for consistent grooves
- Pipe stand and foot switch supplied

FL-24

ROLL GROOVING

FL-24 Roll Grooving Machine (8"–24")

8"–24"

Roll grooving machine for 8"–24" Sch.40 steel pipe.

MODEL	FL-24
Capacity	8" – 24" (Ø219 – Ø630) SCH40 pipe
Max. wall thickness	13 mm
Voltage	380V–415V, 50Hz
Speed	15 RPM
G.W.	340 kg
Standard accessories	Hydraulic pipe support stand; knurl wheel Ø219–Ø325, Ø377–Ø426 and Ø480–Ø630 (one pc each); pinch roller Ø219–Ø530 and Ø630 (one pc each); groove measuring tape (one pc)
Packaging size	102 × 75 × 147 cm

- Grooves 8"–24" (Ø219–Ø630) SCH40 pipe
- Up to 13 mm wall thickness
- Hydraulic pipe support stand included
- 380–415 V supply

FL-24



CHM1

PIPE CUTTING

CHM1 Pipe Cutting Machine (2"–8")

2"–8"

Pipe cutting machine for 2" – 8" pipe, 750 W.

MODEL	CHM1
Capacity	2"–8"
Max. wall thickness	10 mm
Speed	23 RPM
Motor	750 W, 220 V, 50 Hz, single phase

- Cuts 2" – 8" pipe
- 750 W single-phase motor
- Up to 10 mm wall thickness
- 23 RPM cutting speed

CHM1



CHM2

PIPE CUTTING

CHM2 Pipe Cutting Machine (2"–12")

2"–12"

CHM2



Pipe cutting machine for 2" – 12" pipe, 1100 W.

MODEL	CHM2
Capacity	2"–12"
Max. wall thickness	10 mm
Speed	23 RPM
Motor	1100 W, 220 V, 50 Hz, single phase

- Cuts 2" – 12" pipe
- 1100 W single-phase motor
- Up to 10 mm wall thickness
- 23 RPM cutting speed

FL-J40/250

PIPE CUTTING

FL-J40/250 Pipe Cutting Machine (40–250 mm)

40–250mm

Pipe cutting machine for 40–250 mm pipes, 1400 W.

MODEL	FL-J40/250
Pipe diameter	40 – 250 mm
Voltage	220 V / 50 Hz
Rated power	1400 W
Max. iron pipe wall thickness	8 mm
Max. plastic pipe wall thickness	25 mm
Saw blade diameter	160 × 1.9 × 1.4 × 62 × 48T
Weight	11.9 kg
Package size	74 × 27.5 × 33.5 cm
Application scope	Water supply pipes, electric power pipes, galvanized pipes, plastic lined pipes, fire pipes, sewage pipes, etc.

FL-J40/250



FL-J160/400

PIPE CUTTING

FL-J160/400 Electric Pipe Cutting Machine (160–400 mm)

160–400mm

FL-J160/400



Electric pipe cutting machine for 160–400 mm pipes, 1800 W.

MODEL	FL-J160/400
Voltage	220 V / 50 Hz
Rated power	1800 W
Disc diameter	180 × 2.0 × 60T × 25.4
Pipe diameter	160 – 400 mm
Max. iron pipe wall thickness	8 mm
Max. plastic pipe wall thickness	25 mm
Dimension	76 × 55.5 × 35 cm
Gross weight	25 kg
Application material	Plastic pipes, iron pipes, zinc coated pipes, aluminum pipes, a few kinds of SS pipes

FL-114A

HOLE SAW CUTTING

FL-114A Hole Saw Cutting Machine

FL-114A



Portable hole cutting machine, 1500 W, up to 114 mm.

MODEL	FL-114A
Power input	1500 W
Voltage	230 V, 50 Hz
Max. wall thickness	10 mm
Max. cutting capacity	114 mm
Pipe mounting capacity	30 mm – 220 mm
Drill chuck capacity	3 mm – 16 mm
Overall dimensions (L × W × H)	26 × 24.8 × 51.3 cm
Net weight	16 kg

- Cuts openings up to 114 mm
- 1500 W power input
- Mounts on pipe from 30 to 220 mm
- Drill chuck 3–16 mm

FL-150A

HOLE SAW CUTTING

FL-150A Hole Saw Cutting Machine

Portable hole cutting machine, 1500 W, up to 152 mm.


MODEL	FL-150A
Power input	1500 W
Voltage	230 V, 50 Hz
Speed	110 RPM
Max. wall thickness	10 mm
Max. cutting capacity	152 mm
Pipe mounting capacity	42 mm – 323 mm
Drill chuck capacity	3 mm – 16 mm
Overall dimensions (L × W × H)	40 × 30 × 35 cm
Net weight	20 kg

FL-150A



K-114

HOLE SAW CUTTING
K-114 Hole Saw Cutting Machine

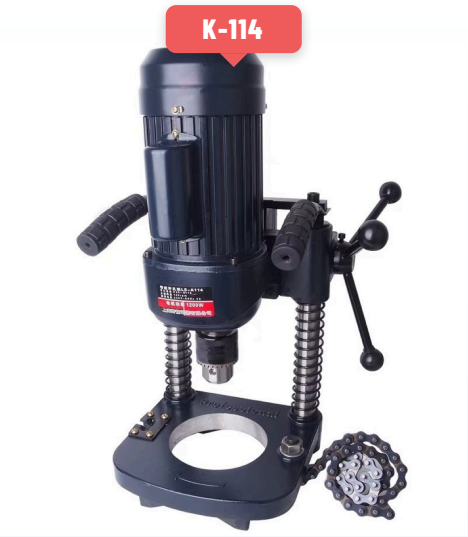

MODEL	K-114
No-load speed	120 RPM
Power	650 W
Voltage	220 V
Frequency	50–60 Hz
Cutting size	25 mm – 114 mm

HOLE SAW CUTTING
Bi-Metal Hole Saw Cutters

Type	Hole saw cutters (Bi-Metal)
Sizes	Available on request



HOLE SAW CUTTING
TCT Hole Saw Cutters



Type	TCT hole saw cutters
Sizes	Available on request

ZD-40

PRESSURE TEST PUMPS

ZD-40 Manual Pressure Test Pump

MODEL	ZD-40
Working pressure	0–50 bar
Piston volume	30 ml/time
Hose length	100 cm
Weight	4 kg
Dimensions (L × W × H)	36 × 18 × 27 cm

ZD-40



TP-50

PRESSURE TEST PUMPS

TP-50 Manual Pressure Test Pump

TP-50



MODEL	TP-50
Working pressure	0–50 bar
Piston volume	40 ml/time
Hose length	150 cm
Weight	8.5 kg
Dimensions (L × W × H)	51 × 19 × 29 cm


FL-40A

PRESSURE TEST PUMPS

FL-40A Electric Pressure Test Pump

MODEL	FL-40A
No. of cylinders	3
Max pressure	40 bar
Flow rate	30 L/min
Motor	Crompton copper 2 HP
RPM	3600
Oil required	1 ltr
Gross weight	20 kg

FL-40A

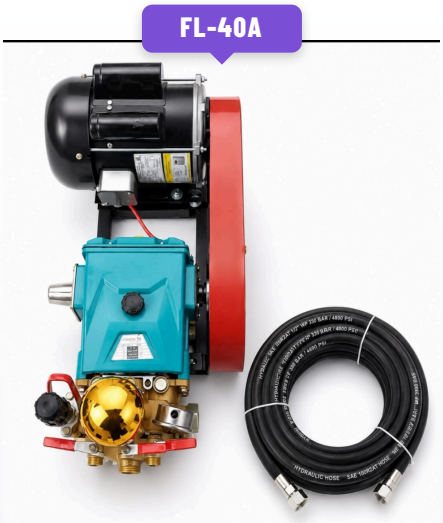

FL-160M4

BUTT JOINTING

FL-160M4 HDPE Butt Fusion Machine

63–160 mm



MODEL	FL-160M4
Welding range (mm)	63, 75, 90, 110, 125, 140, 160
Power	1.7 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	65 × 44 × 49 cm
Weight	40 kg

FL-200M4

BUTT JOINTING

FL-200M4 HDPE Butt Fusion Machine

63–200 mm



MODEL	FL-200M4
Welding range (mm)	63, 75, 90, 110, 125, 140, 160, 180, 200
Power	2.31 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	65 × 44 × 49 cm
Weight	45 kg

FL-250M4

BUTT JOINTING
FL-250M4 HDPE Butt Fusion Machine

90–250 mm



MODEL	FL-250M4
Welding range (mm)	90, 110, 125, 140, 160, 180, 200, 225, 250
Power	3.15 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	75 × 60 × 61 cm
Weight	80 kg

FL-315H4

BUTT JOINTING
FL-315H4 HDPE Butt Fusion Machine

63–315 mm



MODEL	FL-315H4
Welding range (mm)	63, 75, 90, 110, 140, 160, 180, 200, 225, 250, 280, 315
Power	5.35 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	100 × 72 × 68 cm / 68 × 54 × 56 cm
Weight	200 kg

FL-355H4

BUTT JOINTING
FL-355H4 HDPE Butt Fusion Machine

160–355 mm



MODEL	FL-355H4
Welding range (mm)	160, 180, 200, 225, 250, 280, 315, 355
Power	5.45 kW
Voltage	220 V
Working temp.	270°C ± 10%
Dimensions	100 × 72 × 73 cm / 75 × 64 × 62 cm
Weight	230 kg

FL-450H4

BUTT JOINTING
FL-450H4 HDPE Butt Fusion Machine

280–450 mm



MODEL	FL-450H4
Welding range (mm)	280, 315, 355, 400, 450
Power	7.2 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	110 × 93 × 87 cm / 115 × 85 × 67 cm / 65 × 52 × 50 cm
Weight	370 kg

FL-630H4

BUTT JOINTING
FL-630H4 HDPE Butt Fusion Machine

400–630 mm

FL-630H4



Hydraulic butt fusion welding machine, 400–630 mm.

MODEL	FL-630H4
Welding range (mm)	400, 450, 500, 560, 630
Power	10.6 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	140 × 105 × 107 cm / 125 × 110 × 83 cm / 65 × 52 × 50 cm
Weight	600 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-800H4

BUTT JOINTING
FL-800H4 HDPE Butt Fusion Machine

630–800 mm

Hydraulic butt fusion welding machine, 630–800 mm.

MODEL	FL-800H4
Welding range (mm)	630, 710, 800
Power	18.2 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	215 × 135 × 125 cm / 122 × 92 × 182 cm / 75 × 54 × 50 cm
Weight	1200 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-800H4



FL-1000H4

BUTT JOINTING
FL-1000H4 HDPE Butt Fusion Machine

800–1000 mm

FL-1000H4



Hydraulic butt fusion welding machine, 800–1000 mm.

MODEL	FL-1000H4
Welding range (mm)	800, 900, 1000
Power	24 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	215 × 150 × 104 cm / 265 × 165 × 153 cm / 84 × 58 × 52 cm
Weight	2100 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-1200H4

BUTT JOINTING
FL-1200H4 HDPE Butt Fusion Machine

1000–1200 mm

Hydraulic butt fusion welding machine, 1000–1200 mm.

MODEL	FL-1200H4
Welding range (mm)	1000, 1200
Power	30.5 kW
Voltage	380 V
Working temp.	270°C ± 10%
Packing size	252 × 195 × 200 cm / 175 × 129 × 224 cm / 92.5 × 82 × 105 cm
Weight	3370 kg

- HDPE pipe butt fusion
- Accurate pipe alignment
- Technical support available

FL-1200H4



63B-2

BUTT JOINTING
63B-2 Socket Welding Machine

63B-2



Socket fusion welding machine supplied in a metal carry case.

MODEL	63B-2
Fusion range (Dia, mm)	20, 25, 32, 40, 50, 63
Rated power	800 W
Rated voltage	220 V
Frequency	50/60 Hz
Working temperature	240–280 °C

- Fusion range Ø20, 25, 32, 40, 50, 63 mm
- 800 W rated power
- Supplied in a metal carry case

110A

BUTT JOINTING
110A Socket Welding Machine

Socket fusion welding machine supplied in a metal carry case.

MODEL	110A
Fusion range (Dia, mm)	75, 90, 110
Rated power	1200 W
Rated voltage	220 V
Frequency	50/60 Hz
Working temperature	240–280 °C

- Fusion range Ø75, 90, 110 mm
- 1200 W rated power
- Supplied in a metal carry case

110A



HB-50

PIPE BENDING

HB-50 Hydraulic Pipe Bender

Φ21.3 – Φ60

Hydraulic pipe bender for ½"–2" pipe, supplied with six bending dies.

MODEL	HB-50
Bending range	Φ21.3 – Φ60
Standard configuration	6 pairs of molds
Sizes (mm)	22, 28, 34, 42, 48, 60
Maximum working pressure	45 MPa
Maximum working stroke	250 mm
Bending angle	90° ≤ a < 180°
Oil tank capacity	1.2 kg
Stroke	250 mm
Gross weight	50 kg
Wall thickness	2.75 – 4.5 mm
Packing dimensions (cm)	73 × 32 × 16.5
Die size	½", ¾", 1", 1¼", 1½", 2"



HB-80

PIPE BENDING

HB-80 (1/2"-3") Hydraulic Pipe Bender

Φ21.3 – Φ89



Hydraulic pipe bender for 1/2"–3" pipe, supplied with a set of bending dies.

MODEL	HB-80
Bending range	Φ21.3 – Φ89
Standard configuration	8 pairs of molds
Sizes (mm)	22, 28, 34, 42, 48, 60, 75.5, 89
Maximum working pressure	50 MPa
Maximum working stroke	320 mm
Bending angle	90° ≤ a < 180°
Oil tank capacity	2.5 kg
Stroke	320 mm
Gross weight	97 kg
Wall thickness	2.75 – 4.5 mm
Packing dimensions (cm)	93 × 39 × 21

HB-100

PIPE BENDING

HB-100 (1/2"–4") Hydraulic Pipe Bender

Φ21.3 – Φ108

Hydraulic pipe bender for 1/2"–4" pipe, supplied with a set of bending dies.

MODEL	HB-100
Bending range	Φ21.3 – Φ108
Standard configuration	9 pairs of molds
Sizes (mm)	22, 28, 34, 42, 48, 60, 75.5, 89, 108
Maximum working pressure	63 MPa
Maximum working stroke	415 mm
Bending angle	90° ≤ a < 180°
Oil tank capacity	4 kg
Stroke	380 mm
Gross weight	135 kg
Wall thickness	2.75 – 6 mm
Packing dimensions (cm)	119 × 41 × 22.5

HB-100



EHB-50

PIPE BENDING

EHB-50 Electric Pipe Bender

Φ21.3 – Φ60

EHB-50



Electric hydraulic pipe bender with a set of bending dies.

MODEL	EHB-50
Motor	750 W
Bending range	Φ21.3 – Φ60
Standard configuration	6 pairs of molds
Sizes (mm)	22, 28, 34, 42, 48, 60
Maximum working pressure	45 MPa
Maximum working stroke	250 mm
Bending angle	90° ≤ a < 180°
Oil tank capacity	1.2 kg
Stroke	250 mm
Gross weight	50 kg
Wall thickness	2.75 – 4.5 mm
Packing dimensions (cm)	73 × 32 × 16.5
Die size	½", ¾", 1", 1¼", 1½", 2"

PIPE BENDING

Portable Conduit Pipe Bender

Portable bender for 20–32 mm conduit pipe.

Type	**Portable conduit pipe bender**
Capacity	**20 – 32 mm dia conduit pipe**
Weight	**32 kg**

- Bends 20–32 mm conduit pipe
- Portable



SPARE PARTS

Pipe threading oil and other consumables for your machines.



Pipe Threading Oil

Premium quality threading oil, available in 5 Ltr, 10 Ltr and 20 Ltr packing sizes.



Threading Dies Set

Dies set for all types of threading machines and pipes, in SS and alloy material.



Curve Plate



Cutting Wheel



Oil Pump Assembly



Index



Pellet



On Off Switch



Jaw Insert



Front Chuck Jaw



Filter



Screw Plate



Auto Cut Die Head Assembly



Lever type Die Head Assembly



Remmer



Hammer Chuck Body



Motor With Gear Assembly



Shaft Bracket



Cutting Handle



Main Drive Shaft



Fork Chuck Assembly



Length Change Assembly



Rear Hammer Chuck Body



Clutch Plate



Capacitor



Lock Assembly



Export Shaft Gear



Hand Wheel Gear



Oil Pipe



Heating Plate



Trimmer



Clamp and Nut Bolt



FLEET

BUILDING THE FUTURE TOGETHER

FLEET INDUSTRIES PRIVATE LIMITED

THANK YOU

We would be happy to help you choose the right machine

GET IN TOUCH

PHONE / WHATSAPP
+91 83830 36046 · +91 89015 84802

EMAIL
sales@fleetindustries.co.in
info@fleetindustries.co.in

CORPORATE OFFICE / WAREHOUSE
GF KH. NO. 91/3/2, Phirni Road, Bijwasan, New Delhi – 110061

BANGALORE OFFICE / WAREHOUSE
No 11, 2nd Cross, Dayanandanagar, Srirampura, Bangalore – 560021, Karnataka

Pipe Threading Machines | Roll Grooving Machine | Pipe Cutting Machine | Hole Saw Cutting Machines | Pressure Test Pumps | Butt Jointing Machine | Pipe Bending Machines | Spare Parts

Specifications are subject to change. Please contact us to confirm details for your requirement.