



Headings , Paragraphs , Lists

Let's get
Started!

Today's Content

❖ Introduction to HTML Text

❖ Types of Lists in HTML

Elements

❖ Ordered Lists

❖ Headings in HTML

❖ Unordered Lists

❖ Paragraphs in HTML

❖ Nested Lists






Introduction to HTML Text Elements

- ❑ HTML is a markup language used to structure content on the web.
- ❑ Text elements help organize and present textual content clearly.

Common text elements:

- ❖ `<h1>` to `<h6>`: Headings
- ❖ `<p>`: Paragraph
- ❖ `<ol>`: Ordered List
- ❖ `<ul>`: Unordered List
- ❖ `<li>`: List Item





Headings in HTML

- Headings define the structure and importance of content in a web page.
- HTML provides six levels of headings:
 - ✓ `<h1>` is for the main title (used once per page).
 - ✓ `<h2>` to `<h6>` are for subheadings, in decreasing order of importance.


Headings help:

- Improve readability of content.
- Enhance SEO (Search Engine Optimization).
- Aid screen readers and accessibility tools in content navigation.

Syntax Example:

```
<h1>This is a Main Heading</h1>  
<h2>This is a Subheading</h2>
```





Headings - Visual Example

HTML

```
<h2>This is  
H2</h2>  
<h3>This is  
H3</h3>  
<h4>This is  
H4</h4>  
<h5>This is  
H5</h5>
```

Output:

HELLO

HELLO

HELLO

HELLO

HELLO

HELLO



Paragraphs in HTML

- ❖ Paragraphs are defined using the `<p>` tag.
- ❖ Used to display blocks of text.
- ❖ Automatically adds space above and below the text.

Example:

```
<p>This is a paragraph of text.</p>
```






Paragraph – Best Practices



- Do **not** use multiple `<br>` tags to create paragraphs.
- Use semantic `<p>` tags to structure content.
- Use `<strong>`, `<em>`, etc., within paragraphs to style spe




HTML Lists Overview

➤ Lists are used to group related items.

➤ Three main types:

- **Ordered List ()** - numbered
- **Unordered List ()** - bullet points
- **Definition List (<dl>)** - terms and definitions (less common)







Ordered Lists

- Use `<ol>` for steps or sequences.
- Each item uses the `<li>` tag.

Example:

```
<ol>  
  <li>Turn on computer</li>  
  <li>Open browser</li>  
  <li>Visit website</li>  
</ol>
```

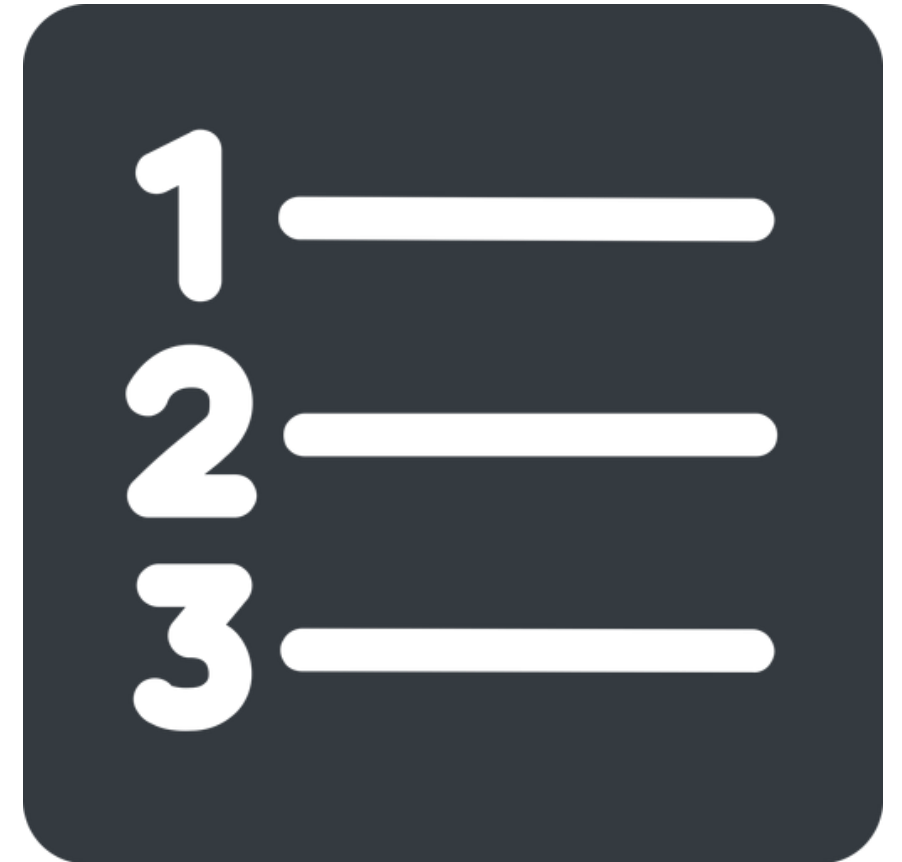




Unordered Lists

- Use `<ul>` for items without a specific order.
- Uses bullets (•) by default.

Example:

```
<ul>  
  <li>Milk</li>  
  <li>Bread</li>  
  <li>Eggs</li>  
</ul>
```





Nested Lists

- Lists can be nested inside list items.

Example:

```
<ul>
  <li>Fruits
    <ul>
      <li>Apple</li>
      <li>Banana</li>
    </ul>
  </li>
  <li>Vegetables</li>
</ul>
```



That's All for Today
Guys!!

Any Queries?

