5. Skip unused correspondence reconstruction during lowering

PR comparison pilot · 3 observations per condition · CPU 22 · 16 GiB allocator cap
500 s timeout per workload process.
Arithmetic-mean whole-process time; independent Fieller 95% intervals; lower ratios mean less runtime.
Parent 33c4a35dfbe0 → this PR ff3ff0721ffb; native 155b6812c334.
Multipattern: parent-to-child changes only; native multipattern omitted at user request.
Multipattern follows the paper catalog: BATAX 2nd and MTTKRP 2nd omitted; no exclusion changes.

Parent This PR

Nested SDQL · 10 workloads · native comparison

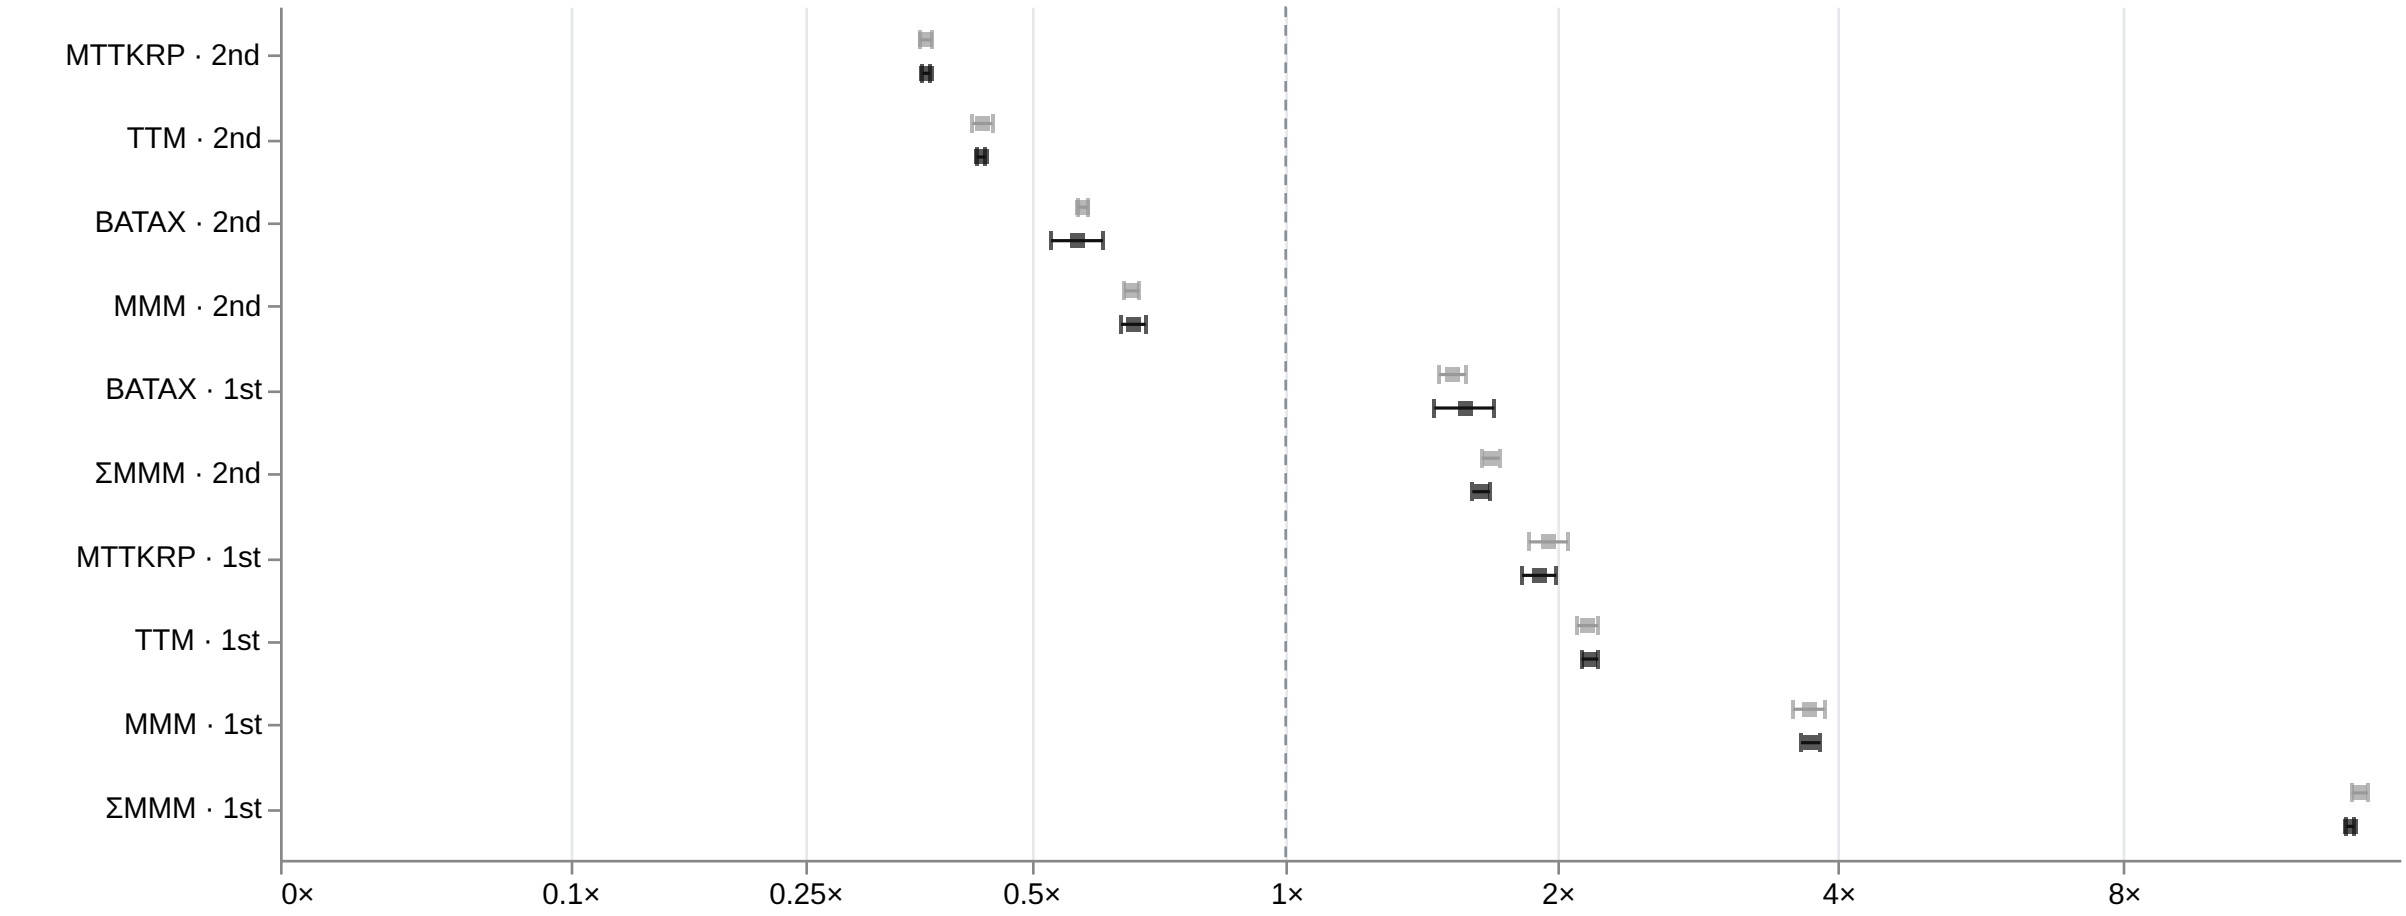

Nested SDQL · incremental change

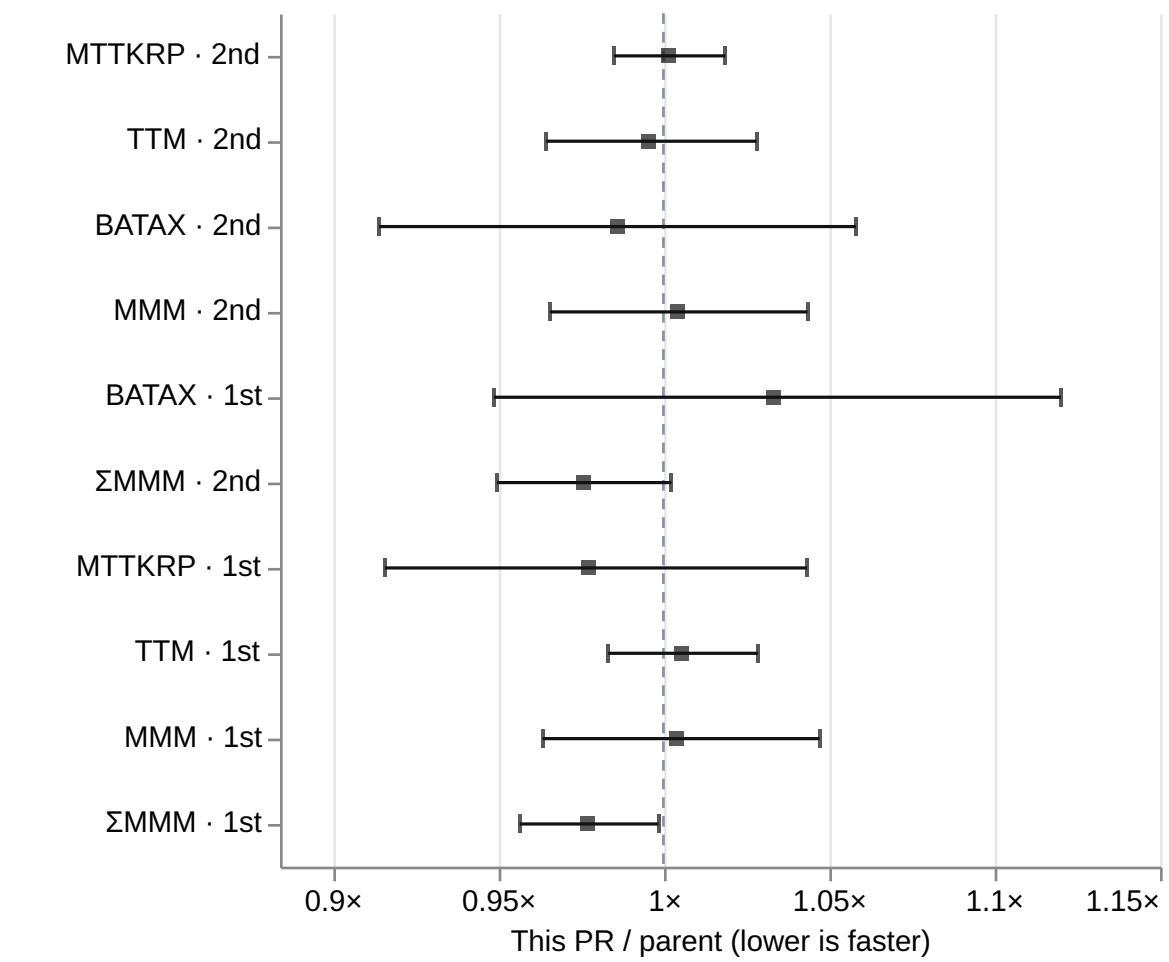
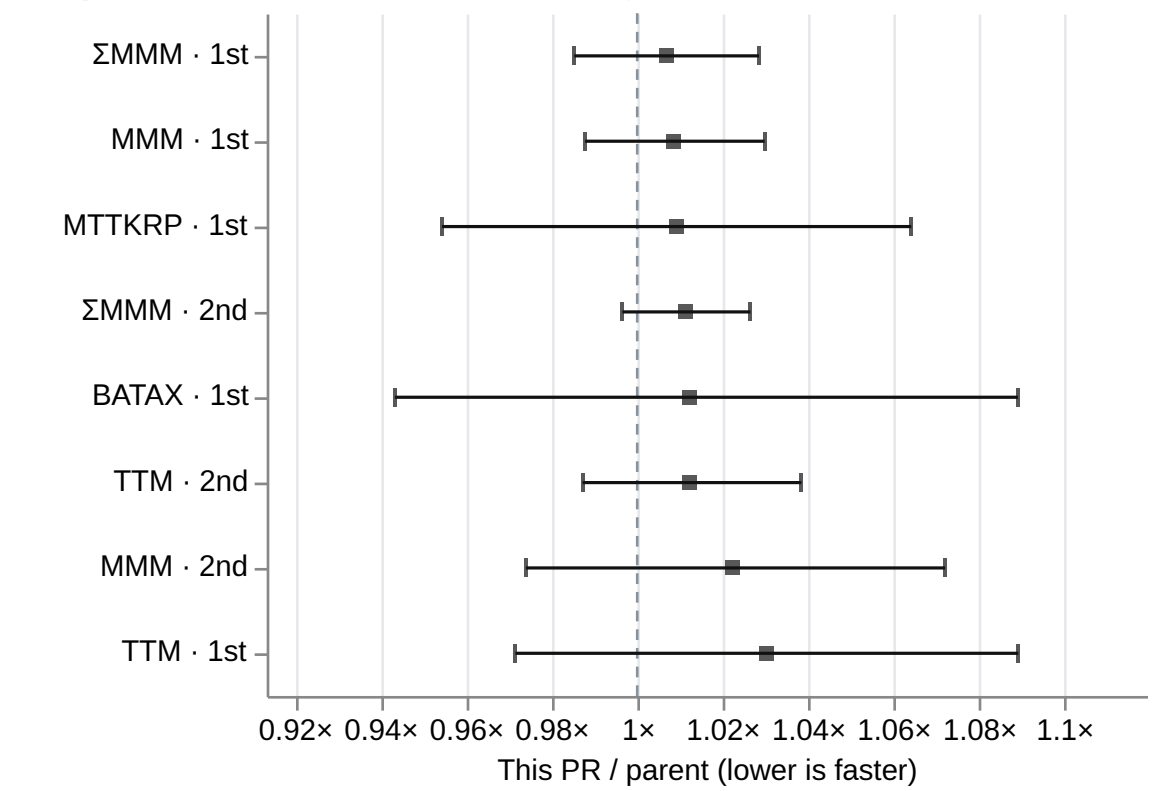
Multipattern SDQL · incremental change