


C4-2b: Insert Data into Tables

Basic SQL - Using DB Browser for SQLite

Input data using DB Browser

- Id field will be populated by auto-increment generated values
- A field without a value is saved with a NULL

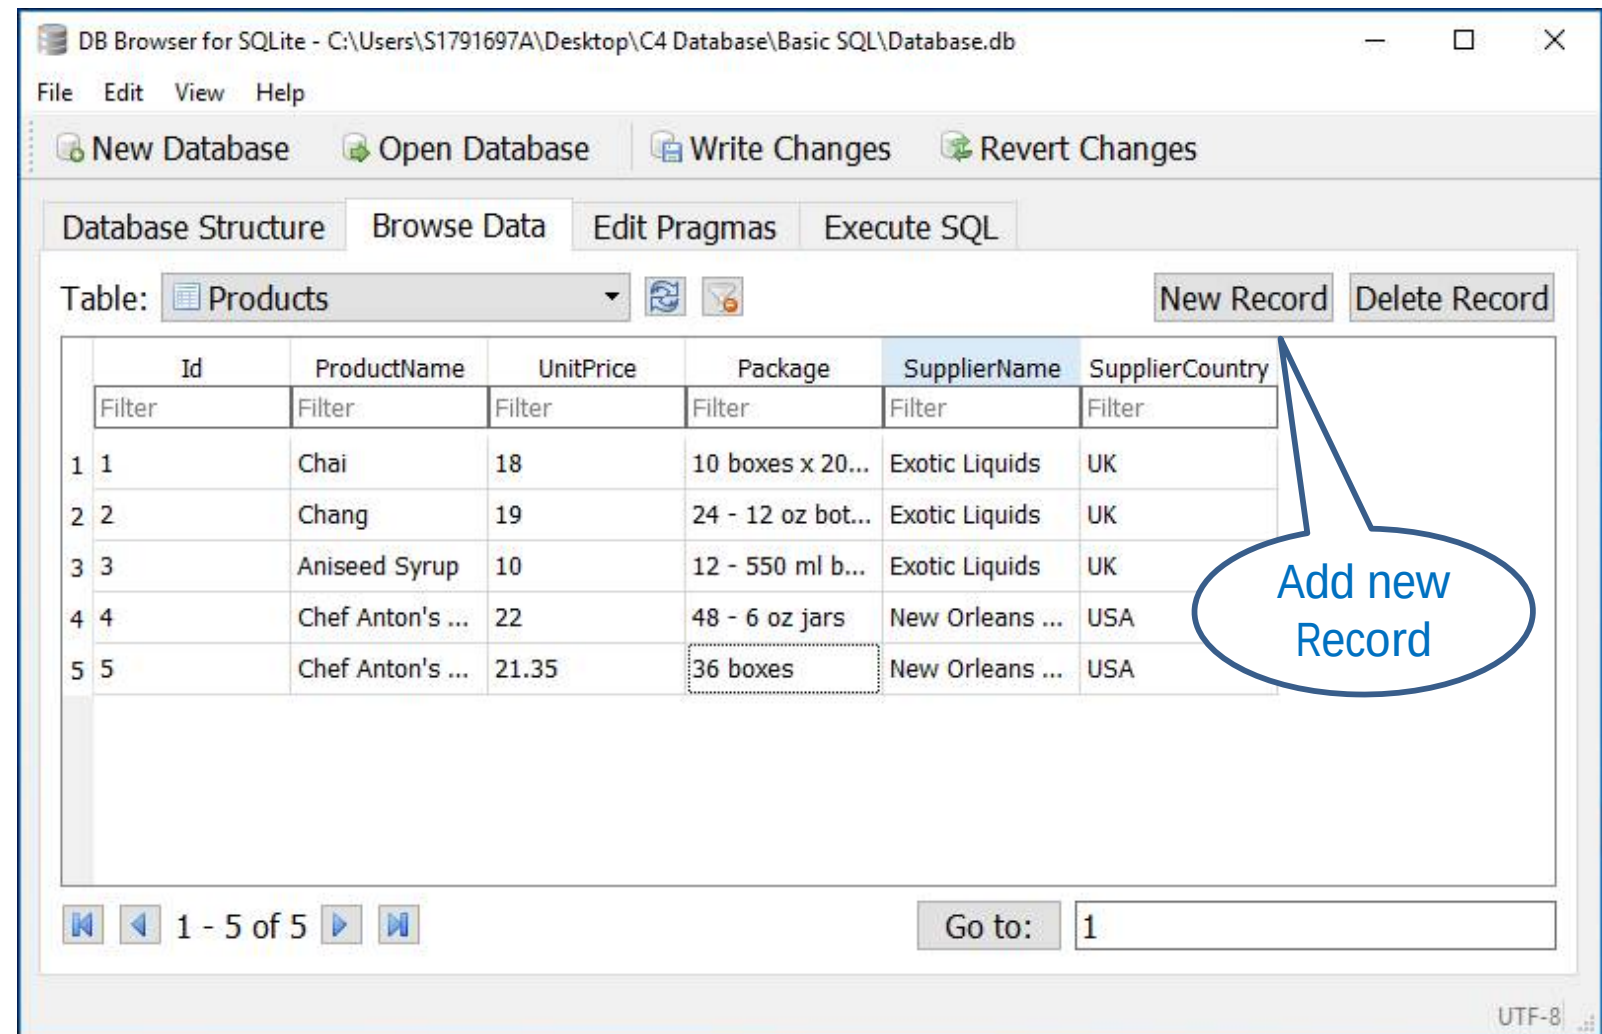

Execute SQL

Insert one row of data into table

```
INSERT INTO Products
    (ProductName, UnitPrice, Package, SupplierName, SupplierCountry)
VALUES
    ('Chai', 18, '10 boxes x 20 bags', 'Exotic Liquids', 'UK');
```


Id	ProductName	UnitPrice	Package	SupplierName	SupplierCountry
1	Chai	18	10 boxes x 20 bags	Exotic Liquids	UK

- Id field will be populated by auto-increment generated values

Execute SQL

Insert multiple rows of data into table

```
INSERT INTO Products
(ProductName, UnitPrice, Package, SupplierName, SupplierCountry)
VALUES
('Chang', 19, '24 - 12 oz bottles', 'Exotic Liquids', 'UK'),
('Aniseed Syrup', 10, '12 - 550ml bottles', 'Exotic Liquids', 'UK'),
("Chef Anton's Cajun Seasoning", 22, '48 - 6 oz jars', 'New Orleans
Cajun Delights', 'USA'),
("Chef Anton's Gumbo Mix", 21.35, '36 boxes', 'New Orleans Cajun
Delights', 'USA');
```

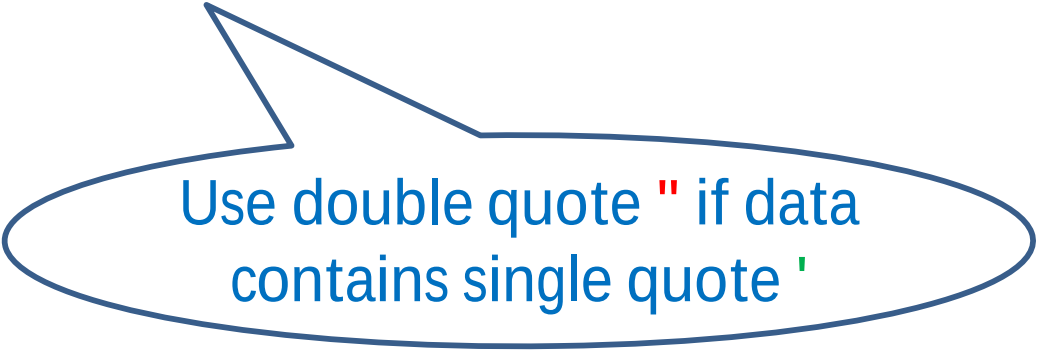

Use double quote " if data
contains single quote '