



AWS S3 Static Website Hosting with Root Domain Configuration

By: Saurabh Chavan

1. Sign in to the AWS Management Console with credentials and open the S3 service home page.

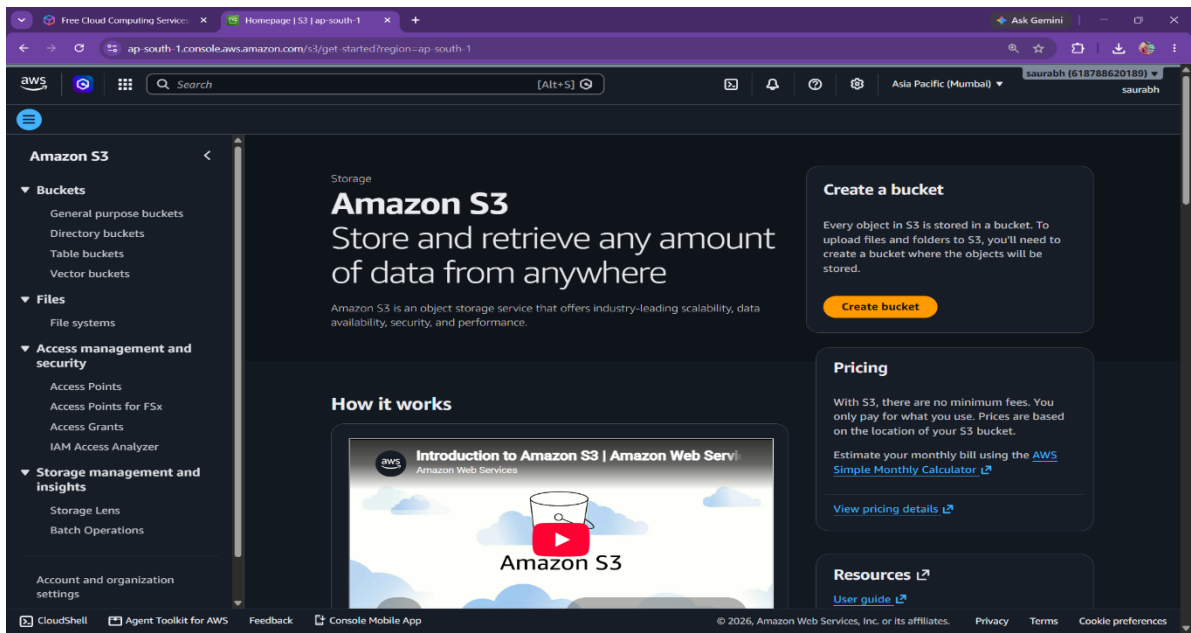


2. Creating an Amazon S3 Bucket Using the Root Domain Name **saaurabhchavan.shop**

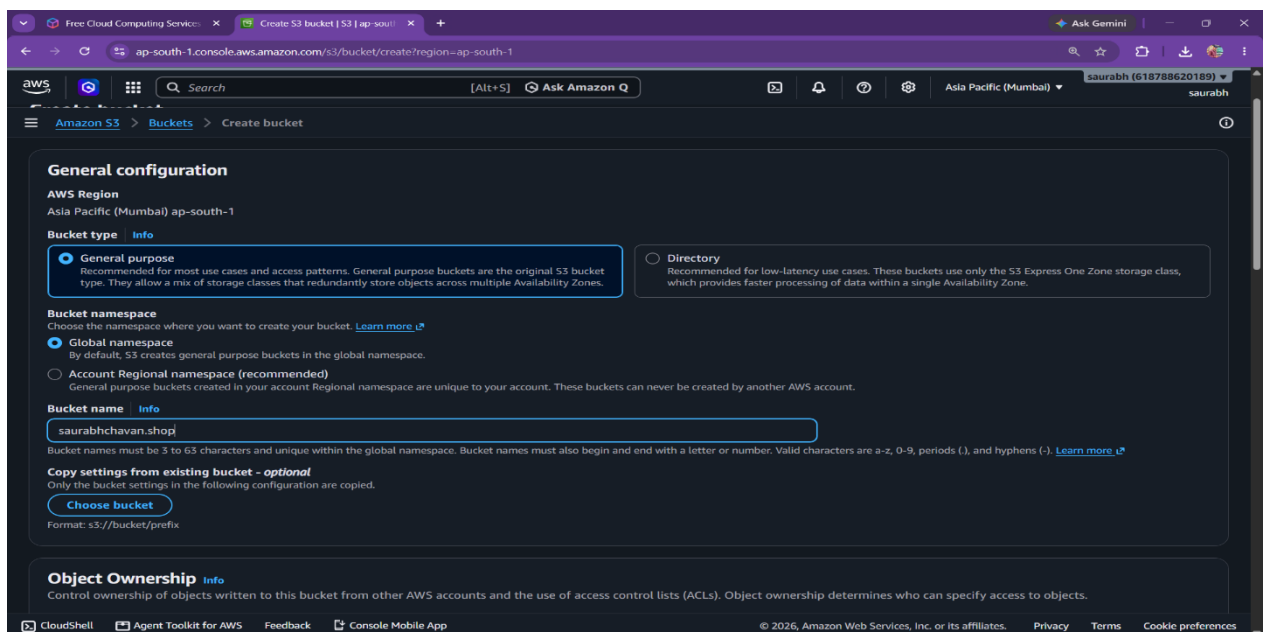


Using the root domain name as the bucket name allows the domain to be directly mapped to the S3 static website through Amazon Route 53.


3. Successfully Created the Root Domain S3 Bucket saurabhchavan.shop

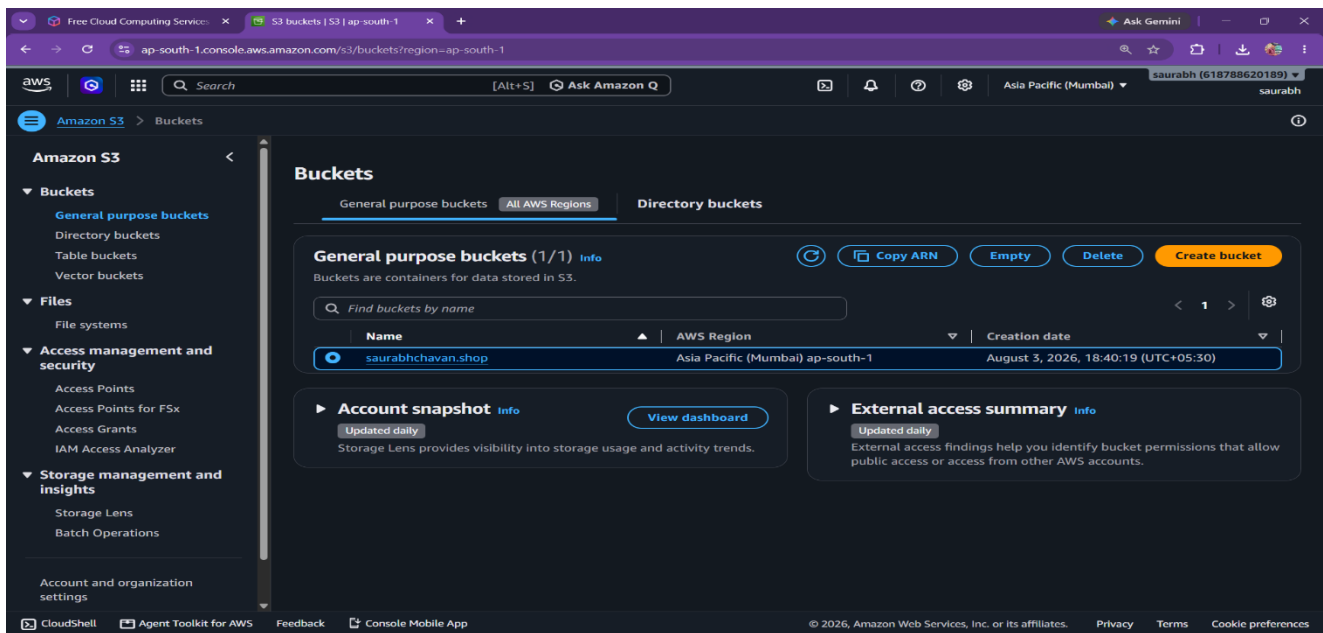


4. Enable Static Website Hosting for the S3 bucket and configure index.html as the default index document.

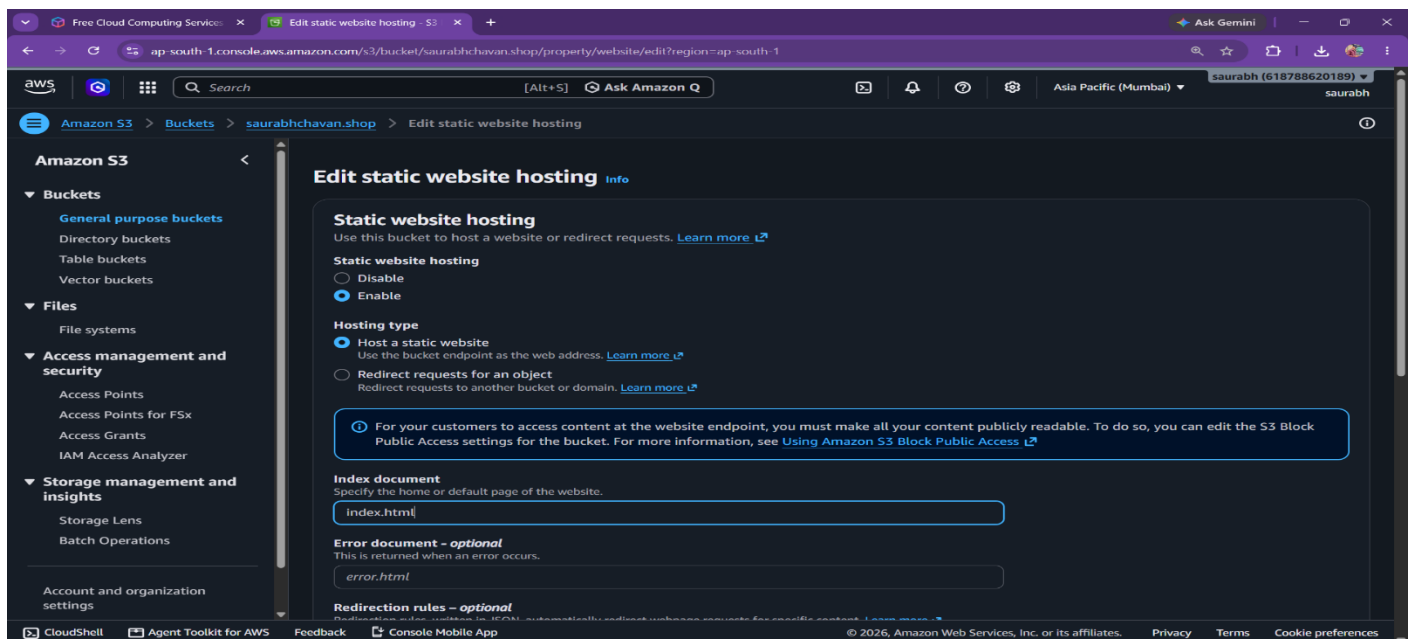


5. Disable Block Public Access to allow the static website to be publicly accessible.

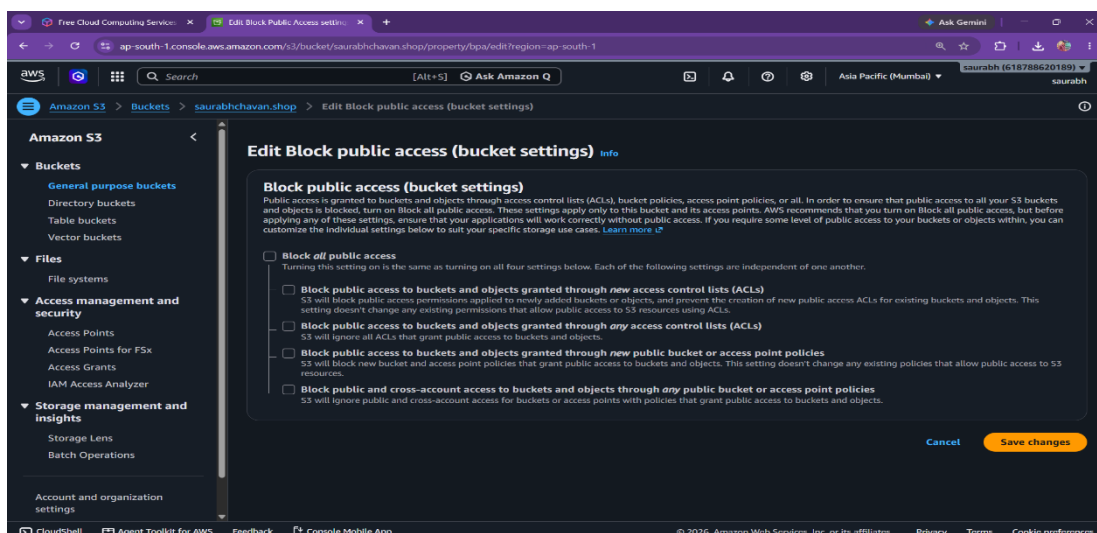


6. Configure **Object Ownership** by enabling ACLs for the S3 bucket. Check the acknowledgment box.

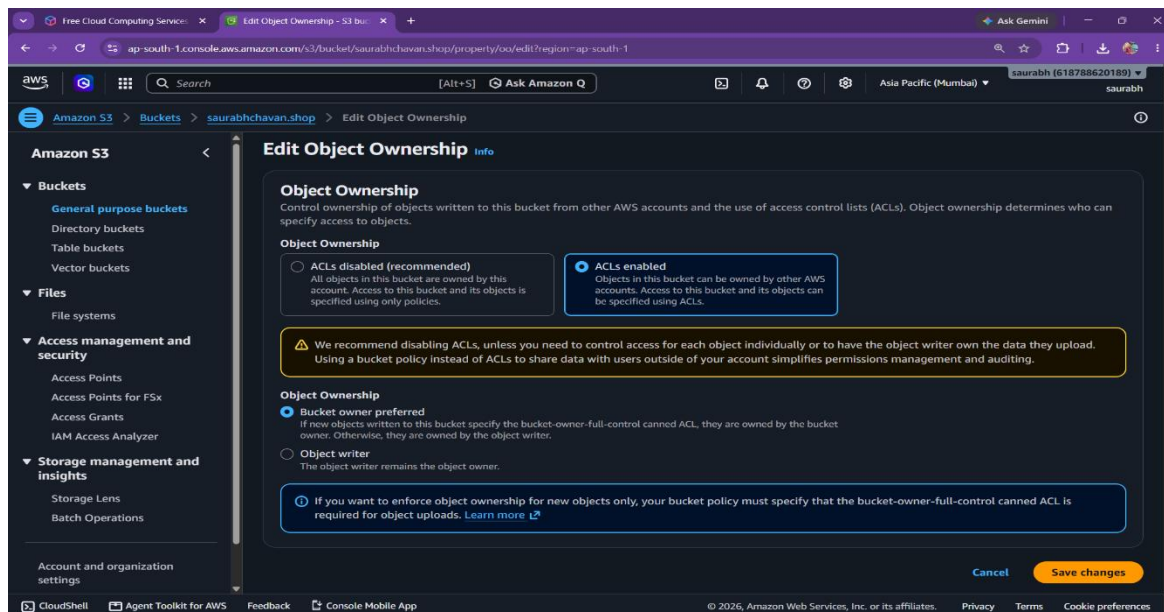


7. Click the **Upload** button and upload all the static website files.

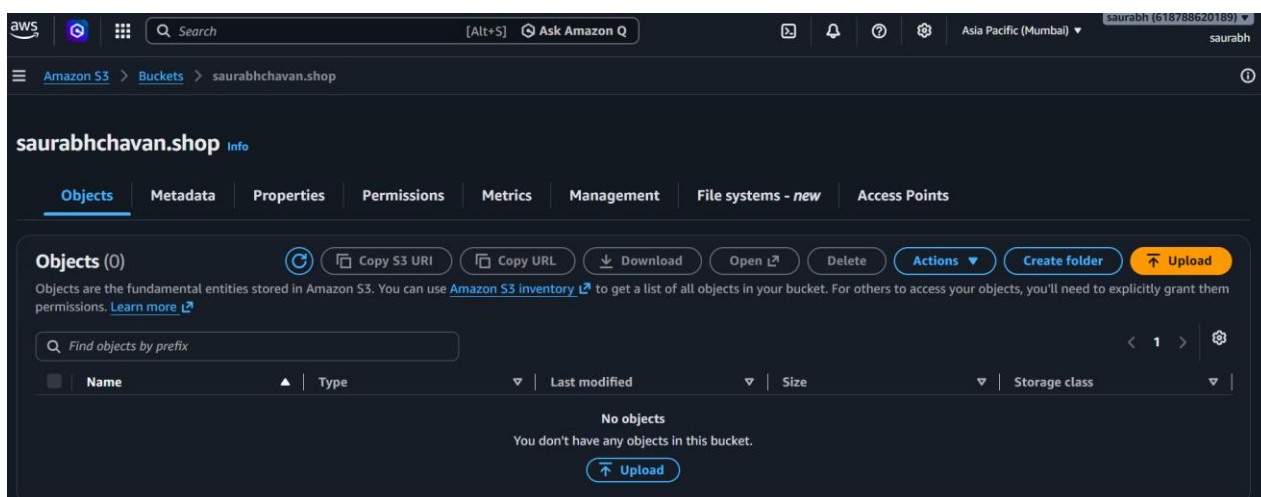


8. Select all the uploaded files, click **Actions**, and select the **Make public using ACL**.

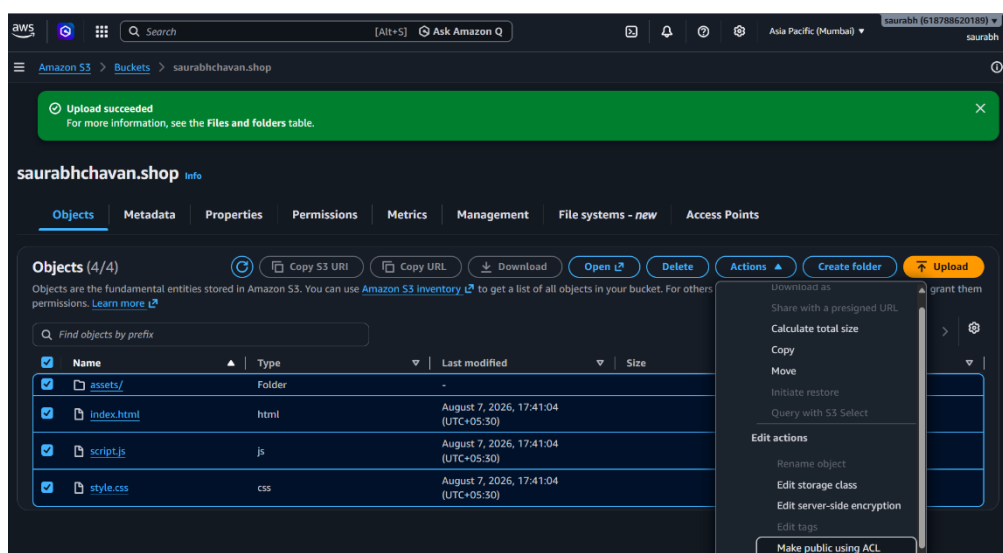


9. Copied the **S3 Bucket Website Endpoint URL** from the bucket properties.

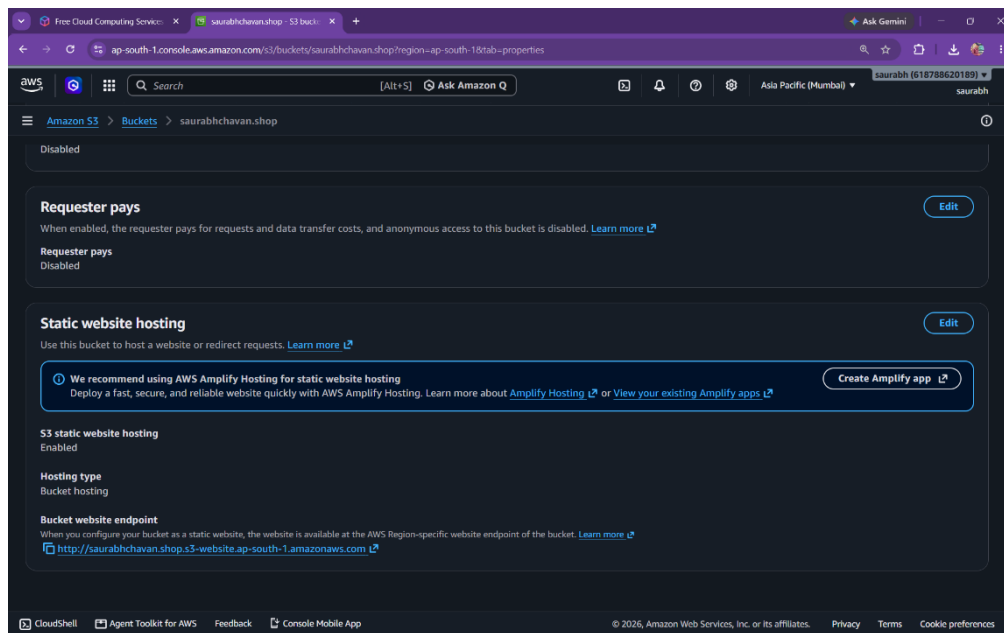


10. Pasted the **S3 Bucket Website Endpoint URL** into the browser and verified that the website was successfully hosted.

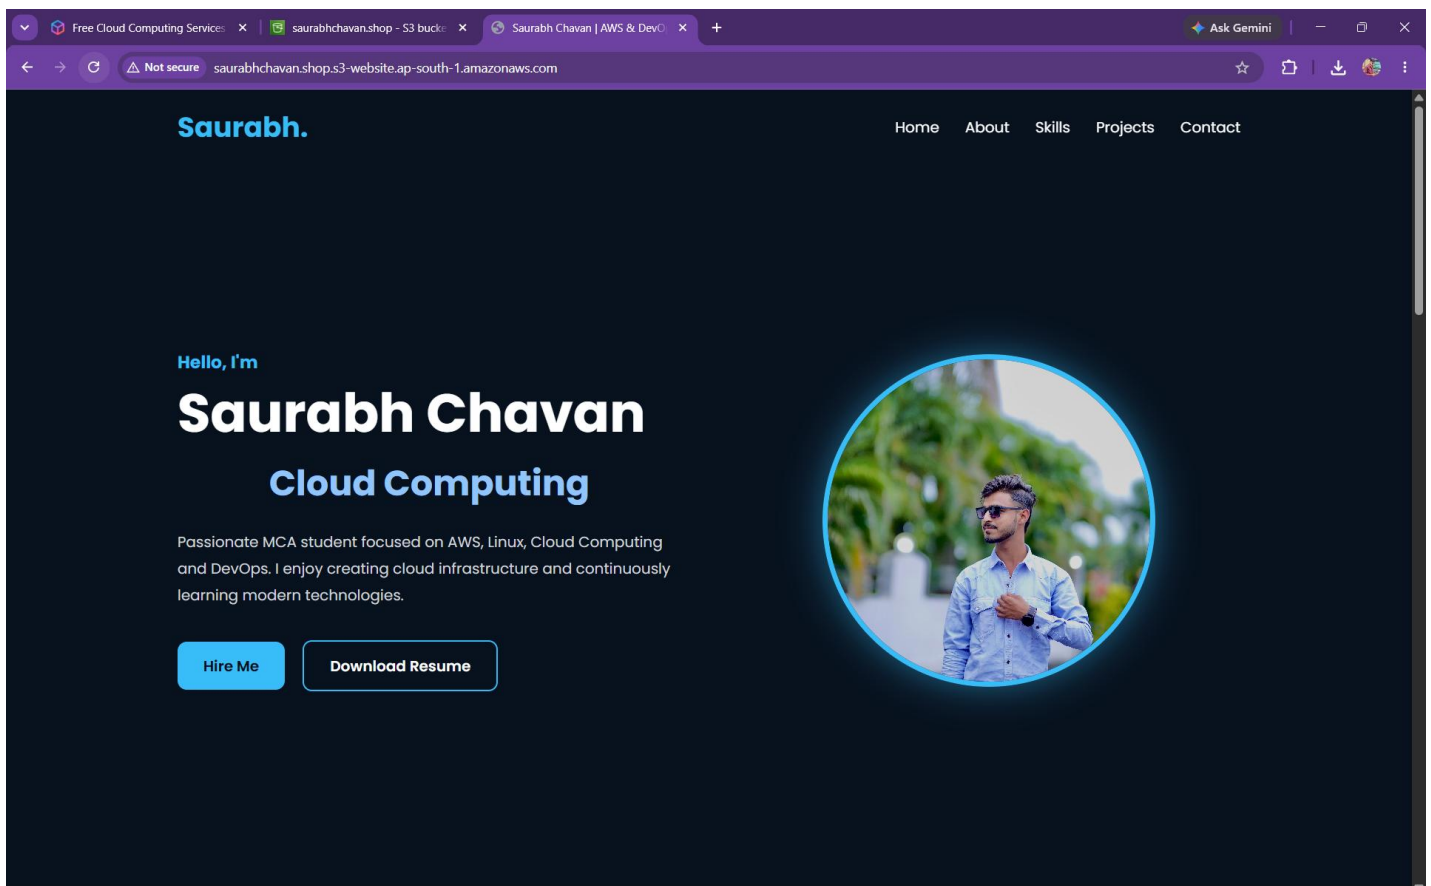

11. Opened the **Amazon Route 53** service. Click on **saurabhchavan.shop** hosted zone, which was already mapped with the **Hostinger** domain using Route 53 name servers.

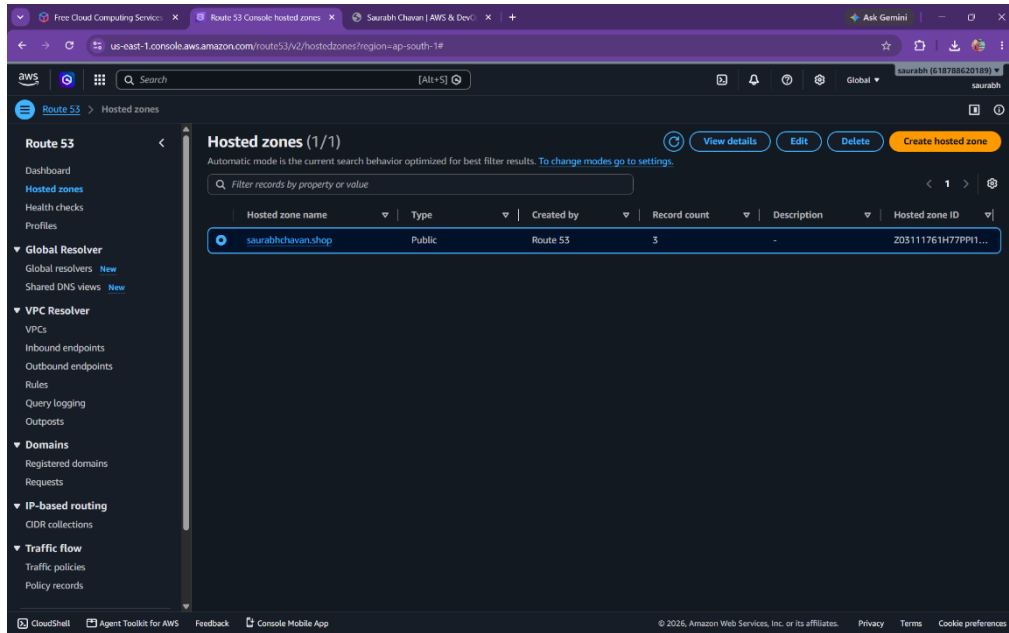

12. Click **Create Record** to add a DNS record for the domain.

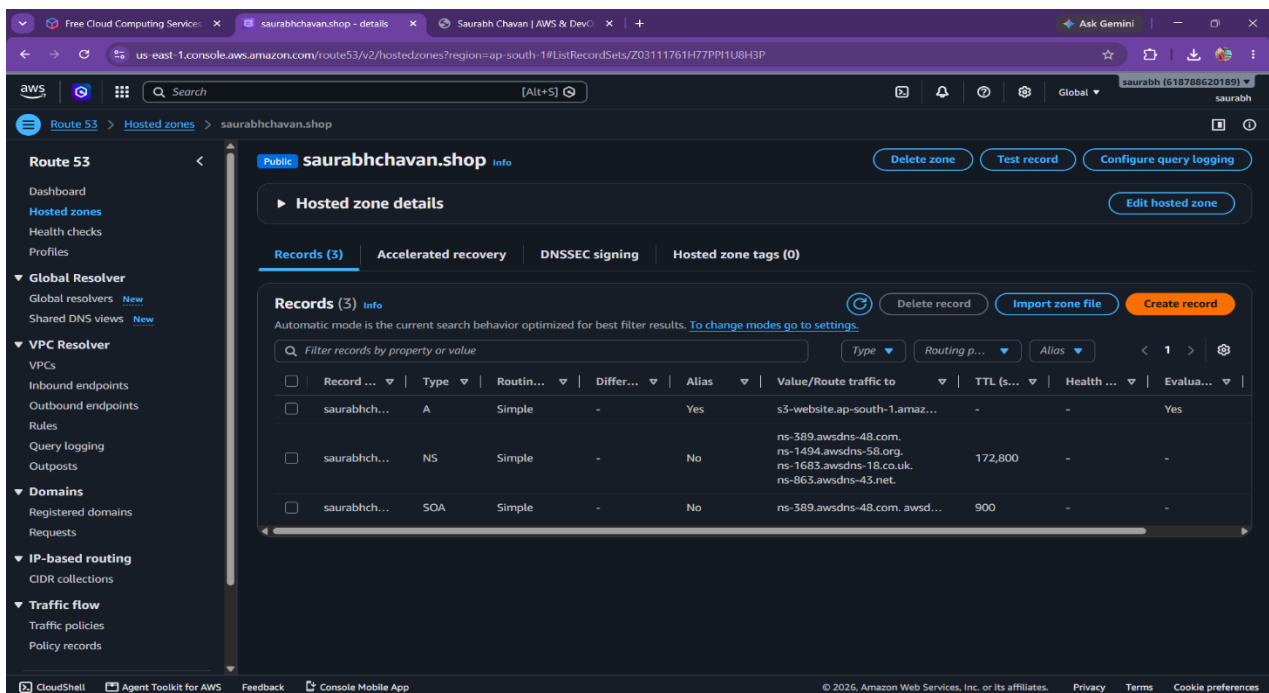

13. Select Record Type: A

Turn **Alias On** : Choose endpoint **Alias to S3 website endpoint**

Choose Region **Asia Pacific (Mumbai)**

S3 website endpoint that is automatically displayed.

Click on **Create Record** to complete the DNS configuration.


The screenshot shows the 'Create record' page in the AWS Route 53 console. The 'Quick create record' section is active. Under 'Record 1', the 'Record name' is 'subdomain' and the 'Record type' is 'A - Routes traffic to an IPv4 address and some AWS resources'. The 'Alias' checkbox is checked. Under 'Route traffic to', the endpoint is 'Alias to S3 website endpoint', the region is 'Asia Pacific (Mumbai)', and the S3 bucket is 's3-website-ap-south-1.amazonaws.com'. The 'Routing policy' is 'Simple routing' and 'Evaluate target health' is set to 'Yes'. At the bottom, there are buttons for 'Add another record', 'Cancel', and 'Create records'.

14. The A Record has been created successfully.

The screenshot shows the 'Hosted zone details' page for the 'saurabhchavan.shop' hosted zone. The 'Records (1/3)' tab is selected, showing a table with the created A record. The table has columns for Record, Type, Routing policy, Differ..., Alias, Value/Route traffic to, TTL, Health, and Evaluate. The first record is an A record with the value 's3-website-ap-south-1.amazonaws.com' and a TTL of 900. The 'Evaluate' column shows 'Yes'.

Record	Type	Routing policy	Differ...	Alias	Value/Route traffic to	TTL (s...)	Health	Evaluate...
☒ saurabhch...	A	Simple	-	Yes	s3-website-ap-south-1.amaz...	-	-	Yes
☐ saurabhch...	NS	Simple	-	No	ns-389.awsdns-48.com. ns-1494.awsdns-58.org. ns-1683.awsdns-18.co.uk. ns-863.awsdns-43.net.	172,800	-	-
☐ saurabhch...	SOA	Simple	-	No	ns-389.awsdns-48.com. awsd...	900	-	-

15. Search the root domain **saurabhchavan.shop** in a web browser and verify that the static website is successfully hosted.

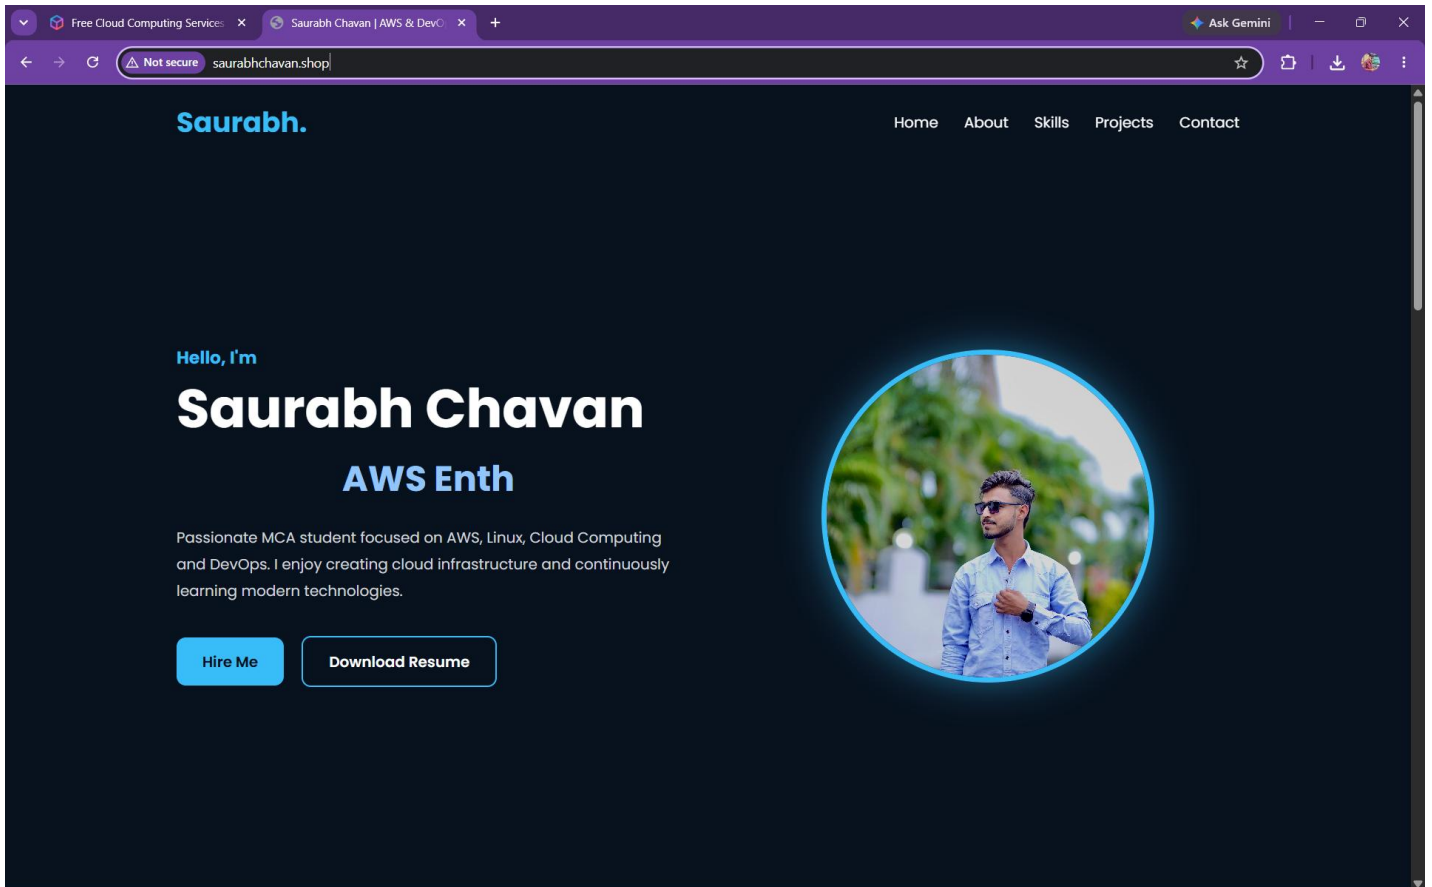

- **Conclusion:**
This project successfully hosted a static website on Amazon S3 and configured a root domain using Amazon Route 53. The website was successfully accessed through the root domain.
- **AWS Services Used**
Amazon S3
Amazon Route 53