

AZURE ENVIRONMENT ASSESSMENT

Contoso

Inventory, Well-Architected findings and remediation roadmap

Report date: 27 September 2026

Inventory export date: 2026-09-20

Inventory source: sample-inventory.csv

Subscriptions in scope: 3

Resources assessed: 133

Contents

Right-click and choose 'Update Field' to build the table of contents.

1. Executive summary

Overall posture score: **75/100 (Fair)**


133	3	19	4
Resources	Subscriptions	Resource groups	Regions
17	73	16	74%
High findings	Medium findings	Low findings	Tag coverage

Key observations

- 133 resources were assessed across 3 subscription(s), 19 resource groups and 4 region(s).
- 106 finding(s) were raised: 17 high, 73 medium and 16 low severity, affecting 78 resources.
- Security is the weakest area (score 65/100); Governance is the strongest (84/100).
- 74% of resources carry all required tags (environment, owner, costCenter).
- Priority high-severity issues: Storage account permits HTTP (4); Storage account allows anonymous blob access (4); VM stopped but not deallocated (4).

Scorecard

Pillar	Score	Rating	Checks	Findings	High	Medium	Low
Security	65	Fair	48	16	12	4	0
Reliability	75	Fair	64	21	0	15	6
Cost Optimization	78	Fair	92	19	4	12	3
Operational Excellence	73	Fair	26	7	0	0	7
Governance	84	Good	267	43	1	42	0

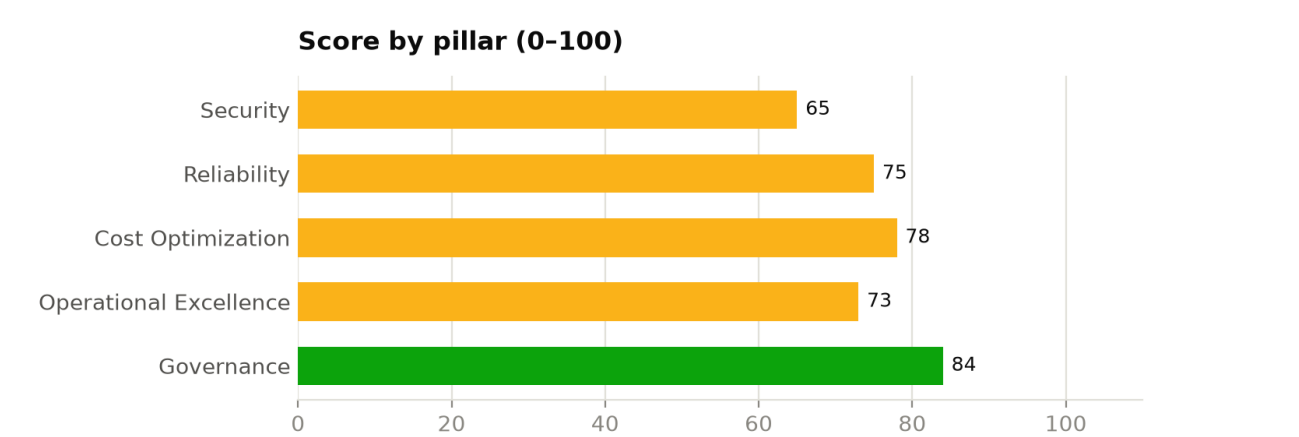

2. Scope and methodology

The assessment is based on the resource inventory export supplied by Contoso (sample-inventory.csv). No access to the Azure environment was required. Each resource was evaluated against a rule set aligned to the Microsoft Azure Well-Architected Framework pillars (Security, Reliability, Cost Optimization, Operational Excellence) plus a Governance pillar covering tagging, regions and deployment model.

Pillar scores are the severity-weighted pass rate of all rule evaluations in that pillar (High = 5, Medium = 3, Low = 1). 80+ is rated Good, 60–79 Fair, and below 60 Poor.

Subscription	Subscription ID	Resources
Contoso-Production	11111111-1111-1111-1111-111111111111	66
Contoso-NonProduction	22222222-2222-2222-2222-222222222222	52
Contoso-Connectivity	33333333-3333-3333-3333-333333333333	15

3. Infrastructure overview

This section describes the environment as understood from the inventory export: what it contains, how it is organised and how each area is configured. Each part ends with the findings that relate to it, so the description can be read alongside the findings in section 5 and the roadmap in section 6.

3.1 Estate at a glance

The environment described by sample-inventory.csv contains 133 Azure resources organised into 3 subscriptions and 19 resource groups, deployed across 4 regions. eastus is the primary region, hosting 45% of all resources, followed by westeurope (29%), uksouth (20%) and centralindia (6%).

By function, the estate is made up of compute (44%), networking (29%), application hosting (9%), storage (8%), databases (6%), security services (3%), monitoring and management (2%) and classic (legacy) resources (1%). The most common resource types are managed disks (34), virtual machines (24), network interfaces (24), storage accounts (10) and App Services (8).

The hosting model is predominantly infrastructure-as-a-service (IaaS), built around virtual machines: there are 24 virtual machines alongside 20 managed application or database services.

Resources by functional area

Area	Resources	% of estate	Main resource types
Compute	58	44%	Managed disks (34), Virtual machines (24)
Networking	38	29%	Network interfaces (24), Public IP addresses (6), Network security groups (4)
Application hosting	12	9%	App Services (8), App Service plans (4)
Storage	10	8%	Storage accounts (10)
Databases	8	6%	SQL databases (6), SQL servers (2)

Area	Resources	% of estate	Main resource types
Security services	4	3%	Key vaults (4)
Monitoring and management	2	2%	Log Analytics workspaces (2)
Classic (legacy) resources	1	1%	Classic cloud services (1)

3.2 Subscriptions and resource organisation

Resources are spread across 3 subscriptions. The breakdown below describes what each subscription contains, which helps show how workloads and environments are separated.

On average a resource group holds 7.0 resources. The largest are rg-prd-app01 in Contoso-Production (18), rg-dev-app01 in Contoso-NonProduction (13) and rg-prd-app02 in Contoso-Production (12).

- **Contoso-Production:** 66 resources in 8 resource groups across 4 regions (centralindia, eastus, uksouth and westeurope). It mainly contains managed disks (20), virtual machines (14) and network interfaces (14). Resources are tagged as environment 'prod'.
- **Contoso-NonProduction:** 52 resources in 8 resource groups across 4 regions (centralindia, eastus, uksouth and westeurope). It mainly contains managed disks (14), virtual machines (10) and network interfaces (10). Resources are tagged as environment 'dev'.
- **Contoso-Connectivity:** 15 resources in 3 resource groups across 2 regions (eastus and westeurope). It mainly contains public IP addresses (6), network security groups (4) and virtual networks (2). Resources are tagged as environment 'shared'.

Subscription summary

Subscription	Resources	Resource groups	Regions	Main resource types
Contoso-Production	66	8	centralindia, eastus, uksouth, westeurope	Managed disks (20), Virtual machines (14), Network interfaces (14)
Contoso-NonProduction	52	8	centralindia, eastus, uksouth, westeurope	Managed disks (14), Virtual machines (10), Network interfaces (10)
Contoso-Connectivity	15	3	eastus, westeurope	Public IP addresses (6), Network security groups (4), Virtual networks (2)

3.3 Regional footprint

Resources are deployed in 4 regions: eastus (60), westeurope (39), uksouth (26) and centralindia (8). Running in several regions gives the option of regional resilience, but only if workloads are actually designed to fail over between them.

The approved regions are eastus, westeurope and uksouth. 8 resources sit outside them, in centralindia (8).

Resources by region

Region	Resources	% of estate	Main areas
eastus	60	45%	Compute (25), Networking (18), Application hosting (7)
westeurope	39	29%	Compute (14), Networking (12), Storage (5)
uksouth	26	20%	Compute (15), Networking (7), Databases (2)
centralindia	8	6%	Compute (4), Storage (2), Networking (1)

Related findings

- GOV-002 Resource outside approved regions: **Medium**, 8 resources (see 5.5 Governance)

3.4 Compute

There are 24 virtual machines across 2 subscriptions and 4 regions.

By operating system, the fleet is Linux (20) and Windows (4). It uses 6 VM sizes, mostly D-series v5 (13), E-series v5 (4) and A-series v2 (3); the most common sizes are Standard_D2s_v5 (9), Standard_E8s_v5 (4) and Standard_D4s_v5 (4).

At the time of export 19 of 24 VMs (79%) were running, 1 was deallocated and 4 were stopped but still allocated, which means their compute is still being billed.

For resilience, 9 VMs are pinned to availability zones and 0 sit in availability sets; the remaining 15 have no zone or availability-set protection and depend on a single host or datacenter.

Storage for these machines is provided by 34 managed disks totalling 4,928 GB, on Premium_LRS (31) and StandardSSD_LRS (3) tiers. Disk states are Attached (24) and Unattached (10). The 10 unattached disks (1,856 GB) are not used by any VM but are still billed.

Virtual machines by size

VM size	Series	Count
Standard_D2s_v5	D-series v5	9
Standard_E8s_v5	E-series v5	4
Standard_D4s_v5	D-series v5	4
Standard_A2_v2	A-series v2	3
Standard_DS2_v2	DS-series v2	2
Standard_B2ms	B-series	2

Related findings

- REL-001 VM has no zone or availability set: **Medium**, 15 resources (see 5.2 Reliability)
- COST-003 VM stopped but not deallocated: **High**, 4 resources (see 5.3 Cost Optimization)
- COST-004 Deallocated VM: **Low**, 1 resource (see 5.3 Cost Optimization)

- COST-001 Unattached managed disk: **Medium**, 10 resources (see 5.3 Cost Optimization)
- OPS-001 Previous-generation VM size: **Low**, 5 resources (see 5.4 Operational Excellence)

3.5 Networking

The network layer consists of 38 resources: Network interfaces (24), Public IP addresses (6), Network security groups (4), Virtual networks (2) and Azure Firewalls (2).

There are 2 virtual networks in eastus and westeurope. The naming (vnet-hub-eastus and vnet-hub-westeurope) and the Azure Firewall deployment (afw-hub-eastus and afw-hub-westeurope) indicate a hub-and-spoke design, where shared connectivity and traffic inspection are centralised in a hub network.

Traffic filtering uses 4 network security groups with 6 custom rules between them. Some NSGs allow RDP or SSH from the Internet (see related findings).

6 public IP addresses are allocated; 2 of them are not associated with any resource.

Network resources

Resource type	Count	Regions
Network interfaces	24	centralindia, eastus, uksouth, westeurope
Public IP addresses	6	eastus, westeurope
Network security groups	4	eastus, westeurope
Virtual networks	2	eastus, westeurope
Azure Firewalls	2	eastus, westeurope

Related findings

- SEC-007 NSG exposes management ports to the Internet: **High**, 2 resources (see 5.1 Security)
- COST-002 Unassociated public IP address: **Low**, 2 resources (see 5.3 Cost Optimization)

3.6 Storage

There are 10 storage accounts, all of kind StorageV2. Replication is GRS for 4, LRS for 3 and ZRS for 3. LRS keeps copies within one datacenter only; ZRS spreads them across zones and GRS/GZRS add a copy in a paired region.

On security settings, 6 of 10 accounts require HTTPS, 8 enforce TLS 1.2 or later, 4 allow anonymous blob access, and 10 accept traffic from public networks.

Storage accounts

Account	Subscription	Replication	HTTPS only	Min TLS	Anonymous blob access
stdevdata00	Contoso-NonProduction	Standard_GRS	Yes	TLS1_2	Allowed
stdevdata01	Contoso-NonProduction	Standard_GRS	No	TLS1_2	Allowed

Account	Subscription	Replication	HTTPS only	Min TLS	Anonymous blob access
stdevdata02	Contoso-NonProduction	Standard_LRS	Yes	TLS1_0	Blocked
stdevdata03	Contoso-NonProduction	Standard_ZRS	No	TLS1_2	Blocked
stdevdata04	Contoso-NonProduction	Standard_GRS	Yes	TLS1_0	Blocked
stprddata00	Contoso-Production	Standard_LRS	Yes	TLS1_2	Blocked
stprddata01	Contoso-Production	Standard_GRS	Yes	TLS1_2	Blocked
stprddata02	Contoso-Production	Standard_ZRS	Yes	TLS1_2	Allowed
stprddata03	Contoso-Production	Standard_ZRS	No	TLS1_2	Blocked
stprddata04	Contoso-Production	Standard_LRS	No	TLS1_2	Allowed

Related findings

- SEC-001 Storage account permits HTTP: **High**, 4 resources (see 5.1 Security)
- SEC-002 Storage account allows anonymous blob access: **High**, 4 resources (see 5.1 Security)
- SEC-003 Storage account accepts TLS < 1.2: **Medium**, 2 resources (see 5.1 Security)
- REL-003 Storage account uses locally redundant replication: **Low**, 3 resources (see 5.2 Reliability)

3.7 Databases

Azure SQL is used with 2 logical servers hosting 6 databases on the S1 (3), Basic (2) and GP_Gen5_2 (1) service tiers.

Public network access is enabled on sql-dev-01; 1 of 6 databases is zone redundant.

Related findings

- SEC-005 SQL server reachable from public networks: **Medium**, 1 resource (see 5.1 Security)
- REL-004 SQL database not zone redundant: **Low**, 3 resources (see 5.2 Reliability)

3.8 Application hosting

Web workloads run on Azure App Service: 8 apps hosted on 4 App Service plans (P1v3 (2), S1 (1) and B1 (1) pricing tiers).

6 of 8 apps enforce HTTPS-only access. The plan(s) asp-dev-00 and asp-dev-01 host no apps but still incur charges.

Related findings

- SEC-006 Web app does not enforce HTTPS: **High**, 2 resources (see 5.1 Security)
- COST-005 Empty App Service plan: **Medium**, 2 resources (see 5.3 Cost Optimization)

3.9 Security services

Secrets, keys and certificates are held in 4 Key Vaults (kv-dev-00, kv-dev-01, kv-prd-00 and kv-prd-01).

3 of 4 vaults have purge protection enabled, which prevents deleted secrets from being permanently removed during the retention period.

Network perimeter protection is provided by 2 Azure Firewalls in eastus and westeurope.

Related findings

- SEC-004 Key Vault purge protection disabled: **Medium**, 1 resource (see 5.1 Security)

3.10 Monitoring and management

Logs are collected in 2 Log Analytics workspaces (log-dev-01 and log-prd-01).

Log retention is 30 days on 2 workspaces.

No Recovery Services vault was found, so there is no evidence of Azure Backup protecting the virtual machines or databases.

Related findings

- OPS-002 Log Analytics retention below target: **Low**, 2 resources (see 5.4 Operational Excellence)

3.11 Governance and tagging

116 of 133 resources (87%) carry at least one tag, and 74% carry all of the required tags (environment, owner and costCenter).

In total 3 distinct tag keys are in use, most often costCenter (107), environment (106) and owner (106).

1 resource still uses the classic (Azure Service Manager) deployment model (legacy-cloudservice). This model is retired, so it needs migrating to Azure Resource Manager.

Required tag coverage


Tag	Resources tagged	Coverage	Most common values
environment	106	80%	prod (52), dev (42), shared (12)
owner	106	80%	app-team (37), platform (35), data-team (34)
costCenter	107	80%	CC300 (39), CC200 (35), CC100 (33)

Related findings


- GOV-001 Required tags missing: **Medium**, 34 resources (see 5.5 Governance)
- GOV-002 Resource outside approved regions: **Medium**, 8 resources (see 5.5 Governance)
- GOV-003 Classic (ASM) resource in use: **High**, 1 resource (see 5.5 Governance)

4. Inventory charts and statistics


Top resource types

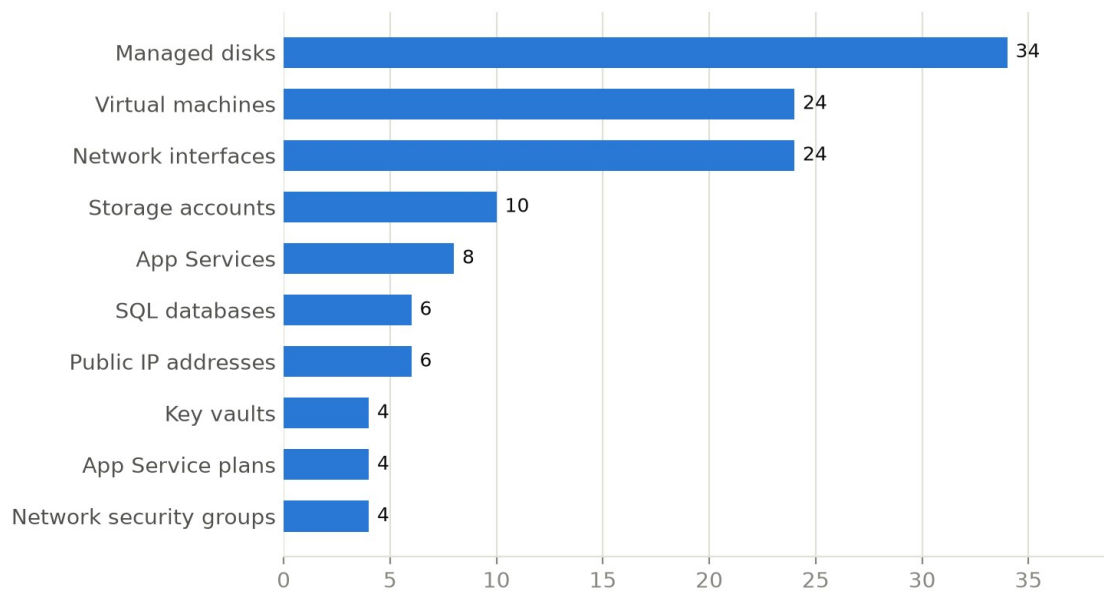

Resources by region

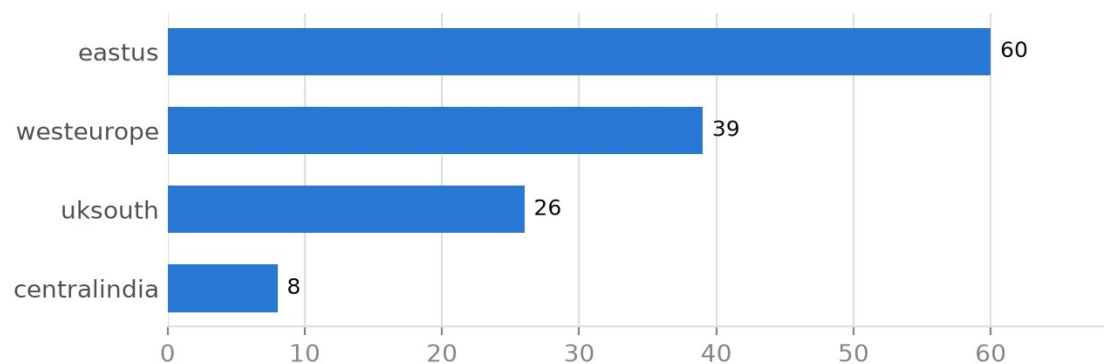


Resources by subscription

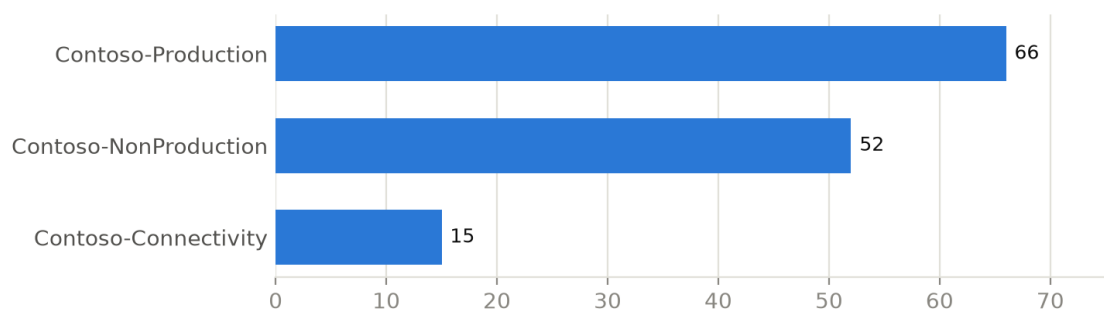

Resource types

Resource type	Count	% of estate
Managed disks	34	25.6%
Virtual machines	24	18.0%
Network interfaces	24	18.0%
Storage accounts	10	7.5%
App Services	8	6.0%
SQL databases	6	4.5%
Public IP addresses	6	4.5%
Key vaults	4	3.0%
App Service plans	4	3.0%
Network security groups	4	3.0%
SQL servers	2	1.5%
Log Analytics workspaces	2	1.5%
Virtual networks	2	1.5%
Azure Firewalls	2	1.5%
Classic cloud services	1	0.8%

5. Assessment findings

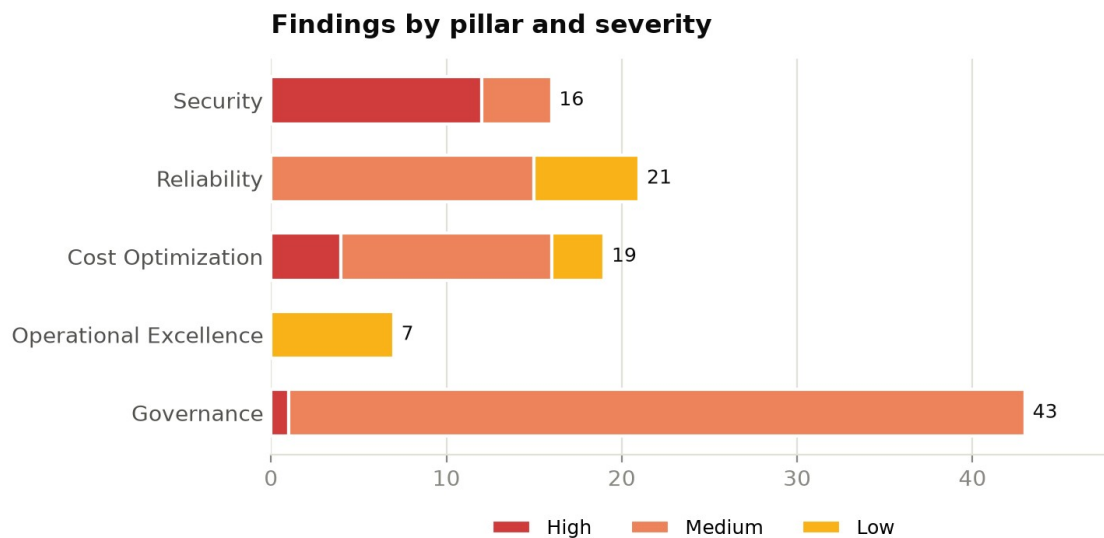

5.1 Security — 65/100 (Fair)

SEC-001: Storage account permits HTTP

Severity: **High** Affected: 4 of 10 evaluated resources

Recommendation: Enable 'Secure transfer required' on the storage account.

Examples: stdevdata01, stdevdata03, stprddata03, stprddata04

Context: see 3.6 Storage in the infrastructure overview.

SEC-002: Storage account allows anonymous blob access

Severity: **High** Affected: 4 of 10 evaluated resources

Recommendation: Set allowBlobPublicAccess to false and use SAS or Entra ID for access.

Examples: stdevdata00, stdevdata01, stprddata02, stprddata04

Context: see 3.6 Storage in the infrastructure overview.

SEC-006: Web app does not enforce HTTPS

Severity: **High** Affected: 2 of 8 evaluated resources

Recommendation: Enable 'HTTPS Only' on the App Service.

Examples: app-dev-01, app-dev-02

Context: see 3.8 Application hosting in the infrastructure overview.

SEC-007: NSG exposes management ports to the Internet

Severity: **High** Affected: 2 of 4 evaluated resources

Recommendation: Remove Internet-sourced RDP/SSH rules; use Azure Bastion or Just-in-Time VM access.

Examples: nsg-mgmt-eastus, nsg-mgmt-west europe

Context: see 3.5 Networking in the infrastructure overview.

SEC-003: Storage account accepts TLS < 1.2

Severity: **Medium** Affected: 2 of 10 evaluated resources

Recommendation: Set minimum TLS version to 1.2.

Examples: stdevdata02, stdevdata04

Context: see 3.6 Storage in the infrastructure overview.

SEC-004: Key Vault purge protection disabled

Severity: **Medium** Affected: 1 of 4 evaluated resources

Recommendation: Enable purge protection to guard secrets and keys against malicious or accidental deletion.

Examples: kv-dev-00

Context: see 3.9 Security services in the infrastructure overview.

SEC-005: SQL server reachable from public networks

Severity: **Medium** Affected: 1 of 2 evaluated resources

Recommendation: Disable public network access and connect through Private Endpoints.

Examples: sql-dev-01

Context: see 3.7 Databases in the infrastructure overview.

5.2 Reliability — 75/100 (Fair)

REL-001: VM has no zone or availability set

Severity: **Medium** Affected: 15 of 24 evaluated resources

Recommendation: Deploy production VMs across availability zones or in a scale set / availability set.

Examples: vm-dev-000, vm-dev-001, vm-dev-002, vm-dev-003, vm-dev-004 ...

Context: see 3.4 Compute in the infrastructure overview.

REL-003: Storage account uses locally redundant replication

Severity: **Low** Affected: 3 of 10 evaluated resources

Recommendation: Use ZRS/GZRS for production data that needs zone or regional resilience.

Examples: stdevdata02, stprddata00, stprddata04

Context: see 3.6 Storage in the infrastructure overview.

REL-004: SQL database not zone redundant

Severity: **Low** Affected: 3 of 6 evaluated resources

Recommendation: Enable zone redundancy on business-critical databases.

Examples: sql-dev-01/db1, sql-dev-01/db2, sql-prd-01/db1

Context: see 3.7 Databases in the infrastructure overview.

5.3 Cost Optimization — 78/100 (Fair)

COST-003: VM stopped but not deallocated

Severity: **High** Affected: 4 of 24 evaluated resources

Recommendation: Deallocate stopped VMs (Stop from the portal/CLI) or schedule auto-shutdown.

Examples: vm-dev-006, vm-dev-009, vm-prd-000, vm-prd-001

Context: see 3.4 Compute in the infrastructure overview.

COST-001: Unattached managed disk

Severity: **Medium** Affected: 10 of 34 evaluated resources

Recommendation: Snapshot if required, then delete orphaned disks.

Examples: disk-dev-orphan-0, disk-dev-orphan-1, disk-dev-orphan-2, disk-dev-orphan-3, disk-prd-orphan-0 ...

Context: see 3.4 Compute in the infrastructure overview.

COST-005: Empty App Service plan

Severity: **Medium** Affected: 2 of 4 evaluated resources

Recommendation: Delete or consolidate App Service plans with no apps.

Examples: asp-dev-00, asp-dev-01

Context: see 3.8 Application hosting in the infrastructure overview.

COST-002: Unassociated public IP address

Severity: **Low** Affected: 2 of 6 evaluated resources

Recommendation: Release public IPs that are not attached to any resource.

Examples: pip-eastus-0, pip-westeuropa-0

Context: see 3.5 Networking in the infrastructure overview.

COST-004: Deallocated VM

Severity: **Low** Affected: 1 of 24 evaluated resources

Recommendation: Confirm the VM is still needed; delete it and its disks if not.

Examples: vm-prd-008

Context: see 3.4 Compute in the infrastructure overview.

5.4 Operational Excellence — 73/100 (Fair)

OPS-001: Previous-generation VM size

Severity: **Low** Affected: 5 of 24 evaluated resources

Recommendation: Resize to current generation (v5/v6) SKUs for better price-performance.

Examples: vm-dev-006, vm-prd-001, vm-prd-002, vm-prd-004, vm-prd-008

Context: see 3.4 Compute in the infrastructure overview.

OPS-002: Log Analytics retention below target

Severity: **Low** Affected: 2 of 2 evaluated resources

Recommendation: Increase retention or archive to meet audit and investigation requirements.

Examples: log-dev-01, log-prd-01

Context: see 3.10 Monitoring and management in the infrastructure overview.

5.5 Governance — 84/100 (Good)

GOV-003: Classic (ASM) resource in use

Severity: **High** Affected: 1 of 1 evaluated resources

Recommendation: Migrate classic resources to Azure Resource Manager before platform retirement.

Examples: legacy-cloudservice

Context: see 3.11 Governance and tagging in the infrastructure overview.

GOV-001: Required tags missing

Severity: **Medium** Affected: 34 of 133 evaluated resources

Recommendation: Enforce the tagging standard with Azure Policy (Require/Inherit a tag) and back-fill existing resources.

Examples: app-prd-01, asp-dev-00, asp-dev-01, disk-dev-orphan-0, disk-prd-orphan-3 ...

Context: see 3.11 Governance and tagging in the infrastructure overview.

GOV-002: Resource outside approved regions

Severity: **Medium** Affected: 8 of 133 evaluated resources

Recommendation: Apply the 'Allowed locations' policy and plan migration of out-of-policy resources.

Examples: disk-dev-orphan-2, disk-prd-orphan-3, nic-prd-012, sql-prd-01, stprddata00 ...

Context: see 3.3 Regional footprint in the infrastructure overview.

6. Remediation roadmap

0-30 days (quick wins & critical risk)

ID	Action	Severity	Pillar	Resources
SEC-001	Enable 'Secure transfer required' on the storage account.	High	Security	4
SEC-002	Set allowBlobPublicAccess to false and use SAS or Entra ID for access.	High	Security	4
COST-003	Deallocate stopped VMs (Stop from the portal/CLI) or schedule auto-shutdown.	High	Cost Optimization	4
SEC-006	Enable 'HTTPS Only' on the App Service.	High	Security	2
SEC-	Remove Internet-sourced RDP/SSH rules; use Azure	High	Security	2

ID	Action	Severity	Pillar	Resources
007	Bastion or Just-in-Time VM access.			
GOV-003	Migrate classic resources to Azure Resource Manager before platform retirement.	High	Governance	1
COST-001	Snapshot if required, then delete orphaned disks.	Medium	Cost Optimization	10
COST-005	Delete or consolidate App Service plans with no apps.	Medium	Cost Optimization	2
COST-002	Release public IPs that are not attached to any resource.	Low	Cost Optimization	2
COST-004	Confirm the VM is still needed; delete it and its disks if not.	Low	Cost Optimization	1

30-60 days

ID	Action	Severity	Pillar	Resources
GOV-001	Enforce the tagging standard with Azure Policy (Require/Inherit a tag) and back-fill existing resources.	Medium	Governance	34
REL-001	Deploy production VMs across availability zones or in a scale set / availability set.	Medium	Reliability	15
GOV-002	Apply the 'Allowed locations' policy and plan migration of out-of-policy resources.	Medium	Governance	8
SEC-003	Set minimum TLS version to 1.2.	Medium	Security	2
SEC-004	Enable purge protection to guard secrets and keys against malicious or accidental deletion.	Medium	Security	1
SEC-005	Disable public network access and connect through Private Endpoints.	Medium	Security	1

60-90 days

ID	Action	Severity	Pillar	Resources
OPS-001	Resize to current generation (v5/v6) SKUs for better price-performance.	Low	Operational Excellence	5
REL-003	Use ZRS/GZRS for production data that needs zone or regional resilience.	Low	Reliability	3
REL-004	Enable zone redundancy on business-critical databases.	Low	Reliability	3
OPS-002	Increase retention or archive to meet audit and investigation requirements.	Low	Operational Excellence	2

Appendix A. Detailed findings

Rule	Severity	Resource	Type	Resource group	Subscription	Detail
COST-003	High	vm-dev-006	Virtual machines	rg-dev-app03	Contoso-NonProduction	VM is stopped but still allocated (compute is billed)
COST-003	High	vm-dev-009	Virtual machines	rg-dev-app02	Contoso-NonProduction	VM is stopped but still allocated (compute is billed)
COST-003	High	vm-prd-000	Virtual machines	rg-prd-app01	Contoso-Production	VM is stopped but still allocated (compute is billed)
COST-003	High	vm-prd-001	Virtual machines	rg-prd-app02	Contoso-Production	VM is stopped but still allocated (compute is billed)
GOV-003	High	legacy-cloudservice	Classic cloud services	rg-legacy	Contoso-Connectivity	Classic (ASM) deployment model resource
SEC-001	High	stdevdata01	Storage accounts	rg-dev-data	Contoso-NonProduction	HTTP traffic is permitted
SEC-001	High	stdevdata03	Storage accounts	rg-dev-data	Contoso-NonProduction	HTTP traffic is permitted
SEC-001	High	stprddata03	Storage accounts	rg-prd-data	Contoso-Production	HTTP traffic is permitted
SEC-001	High	stprddata04	Storage accounts	rg-prd-data	Contoso-Production	HTTP traffic is permitted
SEC-002	High	stdevdata00	Storage accounts	rg-dev-data	Contoso-NonProduction	Anonymous blob access is allowed
SEC-002	High	stdevdata01	Storage accounts	rg-dev-data	Contoso-NonProduction	Anonymous blob access is allowed
SEC-002	High	stprddata02	Storage accounts	rg-prd-data	Contoso-Production	Anonymous blob access is allowed
SEC-002	High	stprddata04	Storage accounts	rg-prd-data	Contoso-Production	Anonymous blob access is allowed
SEC-006	High	app-dev-01	App Services	rg-dev-web	Contoso-NonProduction	HTTPS-only is not enforced
SEC-006	High	app-dev-02	App Services	rg-dev-web	Contoso-NonProduction	HTTPS-only is not enforced
SEC-007	High	nsg-mgmt-eastus	Network security groups	rg-hub-eastus	Contoso-Connectivity	Internet-exposed management ports: allow-rdp (3389)
SEC-007	High	nsg-mgmt-westeuropa	Network security groups	rg-hub-westeuropa	Contoso-Connectivity	Internet-exposed management ports: allow-rdp (3389)
COST-001	Medium	disk-dev-orphan-0	Managed disks	rg-dev-app01	Contoso-NonProduction	Unattached Premium_LRS disk, 128 GB
COST-001	Medium	disk-dev-orphan-1	Managed disks	rg-dev-app01	Contoso-NonProduction	Unattached Premium_LRS disk, 64 GB
COST-001	Medium	disk-dev-orphan-2	Managed disks	rg-dev-app01	Contoso-NonProduction	Unattached StandardSSD_LRS disk, 64 GB
COST-001	Medium	disk-dev-orphan-3	Managed disks	rg-dev-app01	Contoso-NonProduction	Unattached Premium_LRS disk, 64 GB
COST-001	Medium	disk-prd-orphan-0	Managed disks	rg-prd-app01	Contoso-Production	Unattached StandardSSD_LRS disk, 64 GB
COST-001	Medium	disk-prd-orphan-1	Managed disks	rg-prd-app01	Contoso-Production	Unattached Premium_LRS disk, 512 GB
COST-001	Medium	disk-prd-orphan-2	Managed disks	rg-prd-app01	Contoso-Production	Unattached Premium_LRS disk, 512 GB
COST-001	Medium	disk-prd-orphan-3	Managed disks	rg-prd-app01	Contoso-Production	Unattached Premium_LRS disk, 128 GB
COST-001	Medium	disk-prd-orphan-4	Managed disks	rg-prd-app01	Contoso-Production	Unattached StandardSSD_LRS disk, 256 GB
COST-001	Medium	disk-prd-orphan-5	Managed disks	rg-prd-app01	Contoso-Production	Unattached Premium_LRS disk, 64 GB
COST-005	Medium	asp-dev-00	App Service plans	rg-dev-web	Contoso-NonProduction	App Service plan hosts no apps
COST-005	Medium	asp-dev-01	App Service plans	rg-dev-web	Contoso-NonProduction	App Service plan hosts no apps
GOV-001	Medium	app-prd-01	App Services	rg-prd-web	Contoso-Production	Missing tag(s): environment, owner
GOV-001	Medium	asp-dev-00	App Service plans	rg-dev-web	Contoso-NonProduction	Missing tag(s): environment, owner
GOV-001	Medium	asp-dev-01	App Service plans	rg-dev-web	Contoso-NonProduction	Missing tag(s): environment, owner
GOV-001	Medium	disk-dev-orphan-0	Managed disks	rg-dev-app01	Contoso-NonProduction	Missing tag(s): costCenter
GOV-001	Medium	disk-prd-orphan-3	Managed disks	rg-prd-app01	Contoso-Production	Missing tag(s): costCenter
GOV-001	Medium	kv-prd-00	Key vaults	rg-prd-sec	Contoso-Production	Missing tag(s): environment, owner, costCenter

Rule	Severity	Resource	Type	Resource group	Subscription	Detail
GOV-001	Medium	kv-prd-01	Key vaults	rg-prd-sec	Contoso-Production	Missing tag(s): costCenter
GOV-001	Medium	nic-dev-002	Network interfaces	rg-dev-app03	Contoso-NonProduction	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	nic-dev-004	Network interfaces	rg-dev-app01	Contoso-NonProduction	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	nic-dev-005	Network interfaces	rg-dev-app02	Contoso-NonProduction	Missing tag(s): environment
GOV-001	Medium	nic-dev-006	Network interfaces	rg-dev-app03	Contoso-NonProduction	Missing tag(s): owner, costCenter
GOV-001	Medium	nic-prd-003	Network interfaces	rg-prd-app04	Contoso-Production	Missing tag(s): environment, costCenter
GOV-001	Medium	nic-prd-006	Network interfaces	rg-prd-app03	Contoso-Production	Missing tag(s): environment, owner
GOV-001	Medium	nsg-app-westeuropa	Network security groups	rg-hub-westeuropa	Contoso-Connectivity	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	pip-eastus-0	Public IP addresses	rg-hub-eastus	Contoso-Connectivity	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	pip-eastus-1	Public IP addresses	rg-hub-eastus	Contoso-Connectivity	Missing tag(s): owner, costCenter
GOV-001	Medium	pip-eastus-2	Public IP addresses	rg-hub-eastus	Contoso-Connectivity	Missing tag(s): environment, owner
GOV-001	Medium	sql-dev-01	SQL servers	rg-dev-data	Contoso-NonProduction	Missing tag(s): environment, costCenter
GOV-001	Medium	stdevdata02	Storage accounts	rg-dev-data	Contoso-NonProduction	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	stprddata04	Storage accounts	rg-prd-data	Contoso-Production	Missing tag(s): environment, owner
GOV-001	Medium	vm-dev-003	Virtual machines	rg-dev-app04	Contoso-NonProduction	Missing tag(s): owner, costCenter
GOV-001	Medium	vm-dev-003_OsDisk	Managed disks	rg-dev-app04	Contoso-NonProduction	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-dev-006	Virtual machines	rg-dev-app03	Contoso-NonProduction	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-dev-008	Virtual machines	rg-dev-app01	Contoso-NonProduction	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-prd-000_OsDisk	Managed disks	rg-prd-app01	Contoso-Production	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-prd-001	Virtual machines	rg-prd-app02	Contoso-Production	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-prd-003_OsDisk	Managed disks	rg-prd-app04	Contoso-Production	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-prd-004	Virtual machines	rg-prd-app01	Contoso-Production	Missing tag(s): environment, owner
GOV-001	Medium	vm-prd-005_OsDisk	Managed disks	rg-prd-app02	Contoso-Production	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-prd-007_OsDisk	Managed disks	rg-prd-app04	Contoso-Production	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-prd-009	Virtual machines	rg-prd-app02	Contoso-Production	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-prd-009_OsDisk	Managed disks	rg-prd-app02	Contoso-Production	Missing tag(s): costCenter
GOV-001	Medium	vm-prd-010	Virtual machines	rg-prd-app03	Contoso-Production	Missing tag(s): environment, owner, costCenter
GOV-001	Medium	vm-prd-013_OsDisk	Managed disks	rg-prd-app02	Contoso-Production	Missing tag(s): environment, owner, costCenter
GOV-002	Medium	disk-dev-orphan-2	Managed disks	rg-dev-app01	Contoso-NonProduction	Deployed in 'centralindia', outside approved regions
GOV-002	Medium	disk-prd-orphan-3	Managed disks	rg-prd-app01	Contoso-Production	Deployed in 'centralindia', outside approved regions
GOV-002	Medium	nic-prd-012	Network interfaces	rg-prd-app01	Contoso-Production	Deployed in 'centralindia', outside approved regions
GOV-002	Medium	sql-prd-01	SQL servers	rg-prd-data	Contoso-Production	Deployed in 'centralindia', outside approved regions
GOV-002	Medium	stprddata00	Storage accounts	rg-prd-data	Contoso-Production	Deployed in 'centralindia', outside approved regions
GOV-002	Medium	stprddata02	Storage accounts	rg-prd-data	Contoso-Production	Deployed in 'centralindia', outside approved regions
GOV-002	Medium	vm-prd-012	Virtual machines	rg-prd-app01	Contoso-Production	Deployed in 'centralindia', outside approved regions
GOV-002	Medium	vm-prd-012_OsDisk	Managed disks	rg-prd-app01	Contoso-Production	Deployed in 'centralindia', outside approved regions
REL-001	Medium	vm-dev-000	Virtual machines	rg-dev-app01	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set

Rule	Severity	Resource	Type	Resource group	Subscription	Detail
REL-001	Medium	vm-dev-001	Virtual machines	rg-dev-app02	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-dev-002	Virtual machines	rg-dev-app03	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-dev-003	Virtual machines	rg-dev-app04	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-dev-004	Virtual machines	rg-dev-app01	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-dev-005	Virtual machines	rg-dev-app02	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-dev-006	Virtual machines	rg-dev-app03	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-dev-007	Virtual machines	rg-dev-app04	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-dev-008	Virtual machines	rg-dev-app01	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-dev-009	Virtual machines	rg-dev-app02	Contoso-NonProduction	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-prd-003	Virtual machines	rg-prd-app04	Contoso-Production	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-prd-004	Virtual machines	rg-prd-app01	Contoso-Production	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-prd-006	Virtual machines	rg-prd-app03	Contoso-Production	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-prd-007	Virtual machines	rg-prd-app04	Contoso-Production	Not deployed to an availability zone, availability set or scale set
REL-001	Medium	vm-prd-009	Virtual machines	rg-prd-app02	Contoso-Production	Not deployed to an availability zone, availability set or scale set
SEC-003	Medium	stdevdata02	Storage accounts	rg-dev-data	Contoso-NonProduction	Minimum TLS version is TLS1_0
SEC-003	Medium	stdevdata04	Storage accounts	rg-dev-data	Contoso-NonProduction	Minimum TLS version is TLS1_0
SEC-004	Medium	kv-dev-00	Key vaults	rg-dev-sec	Contoso-NonProduction	Purge protection is disabled
SEC-005	Medium	sql-dev-01	SQL servers	rg-dev-data	Contoso-NonProduction	Public network access is enabled
COST-002	Low	pip-eastus-0	Public IP addresses	rg-hub-eastus	Contoso-Connectivity	Public IP is not associated with any resource
COST-002	Low	pip-westeuropa-0	Public IP addresses	rg-hub-westeuropa	Contoso-Connectivity	Public IP is not associated with any resource
COST-004	Low	vm-prd-008	Virtual machines	rg-prd-app01	Contoso-Production	VM is deallocated; disks and IPs still incur cost
OPS-001	Low	vm-dev-006	Virtual machines	rg-dev-app03	Contoso-NonProduction	Previous-generation size Standard_A2_v2
OPS-001	Low	vm-prd-001	Virtual machines	rg-prd-app02	Contoso-Production	Previous-generation size Standard_DS2_v2
OPS-001	Low	vm-prd-002	Virtual machines	rg-prd-app03	Contoso-Production	Previous-generation size Standard_A2_v2
OPS-001	Low	vm-prd-004	Virtual machines	rg-prd-app01	Contoso-Production	Previous-generation size Standard_DS2_v2
OPS-001	Low	vm-prd-008	Virtual machines	rg-prd-app01	Contoso-Production	Previous-generation size Standard_A2_v2
OPS-002	Low	log-dev-01	Log Analytics workspaces	rg-dev-mon	Contoso-NonProduction	Retention is 30 days (target ≥ 90)
OPS-002	Low	log-prd-01	Log Analytics workspaces	rg-prd-mon	Contoso-Production	Retention is 30 days (target ≥ 90)
REL-003	Low	stdevdata02	Storage accounts	rg-dev-data	Contoso-NonProduction	Replication is Standard_LRS (single datacenter)
REL-003	Low	stprddata00	Storage accounts	rg-prd-data	Contoso-Production	Replication is Standard_LRS (single datacenter)
REL-003	Low	stprddata04	Storage accounts	rg-prd-data	Contoso-Production	Replication is Standard_LRS (single datacenter)

Rule	Severity	Resource	Type	Resource group	Subscription	Detail
REL-004	Low	sql-dev-01/db1	SQL databases	rg-dev-data	Contoso-NonProduction	Database is not zone redundant
REL-004	Low	sql-dev-01/db2	SQL databases	rg-dev-data	Contoso-NonProduction	Database is not zone redundant
REL-004	Low	sql-prd-01/db1	SQL databases	rg-prd-data	Contoso-Production	Database is not zone redundant

Appendix B. Resource inventory

Name	Type	Resource group	Location	Subscription	SKU
afw-hub-eastus	Azure Firewalls	rg-hub-eastus	eastus	Contoso-Connectivity	
nsg-app-eastus	Network security groups	rg-hub-eastus	eastus	Contoso-Connectivity	
nsg-mgmt-eastus	Network security groups	rg-hub-eastus	eastus	Contoso-Connectivity	
pip-eastus-0	Public IP addresses	rg-hub-eastus	eastus	Contoso-Connectivity	Standard
pip-eastus-1	Public IP addresses	rg-hub-eastus	eastus	Contoso-Connectivity	Standard
pip-eastus-2	Public IP addresses	rg-hub-eastus	eastus	Contoso-Connectivity	Standard
vnet-hub-eastus	Virtual networks	rg-hub-eastus	eastus	Contoso-Connectivity	
afw-hub-west europe	Azure Firewalls	rg-hub-west europe	west europe	Contoso-Connectivity	
nsg-app-west europe	Network security groups	rg-hub-west europe	west europe	Contoso-Connectivity	
nsg-mgmt-west europe	Network security groups	rg-hub-west europe	west europe	Contoso-Connectivity	
pip-west europe-0	Public IP addresses	rg-hub-west europe	west europe	Contoso-Connectivity	Standard
pip-west europe-1	Public IP addresses	rg-hub-west europe	west europe	Contoso-Connectivity	Standard
pip-west europe-2	Public IP addresses	rg-hub-west europe	west europe	Contoso-Connectivity	Standard
vnet-hub-west europe	Virtual networks	rg-hub-west europe	west europe	Contoso-Connectivity	
legacy-cloudservice	Classic cloud services	rg-legacy	eastus	Contoso-Connectivity	
disk-dev-orphan-0	Managed disks	rg-dev-app01	west europe	Contoso-NonProduction	Premium_LRS
disk-dev-orphan-1	Managed disks	rg-dev-app01	west europe	Contoso-NonProduction	Premium_LRS
disk-dev-orphan-2	Managed disks	rg-dev-app01	centralindia	Contoso-NonProduction	StandardSSD_LRS
disk-dev-orphan-3	Managed disks	rg-dev-app01	eastus	Contoso-NonProduction	Premium_LRS
vm-dev-000_OsDisk	Managed disks	rg-dev-app01	eastus	Contoso-NonProduction	Premium_LRS
vm-dev-004_OsDisk	Managed disks	rg-dev-app01	eastus	Contoso-NonProduction	Premium_LRS
vm-dev-008_OsDisk	Managed disks	rg-dev-app01	eastus	Contoso-NonProduction	Premium_LRS
vm-dev-000	Virtual machines	rg-dev-app01	eastus	Contoso-NonProduction	
vm-dev-004	Virtual machines	rg-dev-app01	eastus	Contoso-NonProduction	
vm-dev-008	Virtual machines	rg-dev-app01	eastus	Contoso-NonProduction	
nic-dev-000	Network interfaces	rg-dev-app01	eastus	Contoso-NonProduction	
nic-dev-004	Network interfaces	rg-dev-app01	eastus	Contoso-NonProduction	
nic-dev-008	Network interfaces	rg-dev-app01	eastus	Contoso-NonProduction	
vm-dev-001_OsDisk	Managed disks	rg-dev-app02	uksouth	Contoso-NonProduction	Premium_LRS
vm-dev-005_OsDisk	Managed disks	rg-dev-app02	uksouth	Contoso-NonProduction	Premium_LRS
vm-dev-009_OsDisk	Managed disks	rg-dev-app02	uksouth	Contoso-NonProduction	Premium_LRS

Name	Type	Resource group	Location	Subscription	SKU
vm-dev-001	Virtual machines	rg-dev-app02	uksouth	Contoso-NonProduction	
vm-dev-005	Virtual machines	rg-dev-app02	uksouth	Contoso-NonProduction	
vm-dev-009	Virtual machines	rg-dev-app02	uksouth	Contoso-NonProduction	
nic-dev-001	Network interfaces	rg-dev-app02	uksouth	Contoso-NonProduction	
nic-dev-005	Network interfaces	rg-dev-app02	uksouth	Contoso-NonProduction	
nic-dev-009	Network interfaces	rg-dev-app02	uksouth	Contoso-NonProduction	
vm-dev-002_OsDisk	Managed disks	rg-dev-app03	eastus	Contoso-NonProduction	Premium_LRS
vm-dev-006_OsDisk	Managed disks	rg-dev-app03	uksouth	Contoso-NonProduction	Premium_LRS
vm-dev-002	Virtual machines	rg-dev-app03	eastus	Contoso-NonProduction	
vm-dev-006	Virtual machines	rg-dev-app03	uksouth	Contoso-NonProduction	
nic-dev-002	Network interfaces	rg-dev-app03	eastus	Contoso-NonProduction	
nic-dev-006	Network interfaces	rg-dev-app03	uksouth	Contoso-NonProduction	
vm-dev-003_OsDisk	Managed disks	rg-dev-app04	eastus	Contoso-NonProduction	Premium_LRS
vm-dev-007_OsDisk	Managed disks	rg-dev-app04	eastus	Contoso-NonProduction	Premium_LRS
vm-dev-003	Virtual machines	rg-dev-app04	eastus	Contoso-NonProduction	
vm-dev-007	Virtual machines	rg-dev-app04	eastus	Contoso-NonProduction	
nic-dev-003	Network interfaces	rg-dev-app04	eastus	Contoso-NonProduction	
nic-dev-007	Network interfaces	rg-dev-app04	eastus	Contoso-NonProduction	
sql-dev-01	SQL servers	rg-dev-data	uksouth	Contoso-NonProduction	
sql-dev-01/db0	SQL databases	rg-dev-data	westeurope	Contoso-NonProduction	Basic
sql-dev-01/db1	SQL databases	rg-dev-data	uksouth	Contoso-NonProduction	S1
sql-dev-01/db2	SQL databases	rg-dev-data	westeurope	Contoso-NonProduction	S1
stdevdata00	Storage accounts	rg-dev-data	westeurope	Contoso-NonProduction	Standard_GRS
stdevdata01	Storage accounts	rg-dev-data	eastus	Contoso-NonProduction	Standard_GRS
stdevdata02	Storage accounts	rg-dev-data	westeurope	Contoso-NonProduction	Standard_LRS
stdevdata03	Storage accounts	rg-dev-data	westeurope	Contoso-NonProduction	Standard_ZRS
stdevdata04	Storage accounts	rg-dev-data	westeurope	Contoso-NonProduction	Standard_GRS
log-dev-01	Log Analytics workspaces	rg-dev-mon	uksouth	Contoso-NonProduction	
kv-dev-00	Key vaults	rg-dev-sec	westeurope	Contoso-NonProduction	
kv-dev-01	Key vaults	rg-dev-sec	eastus	Contoso-NonProduction	
asp-dev-00	App Service plans	rg-dev-web	eastus	Contoso-NonProduction	S1
asp-dev-01	App Service plans	rg-dev-web	eastus	Contoso-NonProduction	B1
app-dev-00	App Services	rg-dev-web	westeurope	Contoso-NonProduction	
app-dev-01	App Services	rg-dev-web	eastus	Contoso-NonProduction	
app-dev-02	App Services	rg-dev-web	eastus	Contoso-NonProduction	
app-dev-03	App Services	rg-dev-web	uksouth	Contoso-NonProduction	
disk-prd-orphan-0	Managed disks	rg-prd-app01	uksouth	Contoso-Production	StandardSSD_LRS
disk-prd-orphan-1	Managed disks	rg-prd-app01	westeurope	Contoso-Production	Premium_LRS
disk-prd-orphan-2	Managed disks	rg-prd-app01	eastus	Contoso-Production	Premium_LRS
disk-prd-orphan-3	Managed disks	rg-prd-app01	centralindia	Contoso-Production	Premium_LRS

Name	Type	Resource group	Location	Subscription	SKU
disk-prd-orphan-4	Managed disks	rg-prd-app01	eastus	Contoso-Production	StandardSSD_LRS
disk-prd-orphan-5	Managed disks	rg-prd-app01	westeurope	Contoso-Production	Premium_LRS
vm-prd-000_OsDisk	Managed disks	rg-prd-app01	westeurope	Contoso-Production	Premium_LRS
vm-prd-004_OsDisk	Managed disks	rg-prd-app01	westeurope	Contoso-Production	Premium_LRS
vm-prd-008_OsDisk	Managed disks	rg-prd-app01	uksouth	Contoso-Production	Premium_LRS
vm-prd-012_OsDisk	Managed disks	rg-prd-app01	centralindia	Contoso-Production	Premium_LRS
vm-prd-000	Virtual machines	rg-prd-app01	westeurope	Contoso-Production	
vm-prd-004	Virtual machines	rg-prd-app01	westeurope	Contoso-Production	
vm-prd-008	Virtual machines	rg-prd-app01	uksouth	Contoso-Production	
vm-prd-012	Virtual machines	rg-prd-app01	centralindia	Contoso-Production	
nic-prd-000	Network interfaces	rg-prd-app01	westeurope	Contoso-Production	
nic-prd-004	Network interfaces	rg-prd-app01	westeurope	Contoso-Production	
nic-prd-008	Network interfaces	rg-prd-app01	uksouth	Contoso-Production	
nic-prd-012	Network interfaces	rg-prd-app01	centralindia	Contoso-Production	
vm-prd-001_OsDisk	Managed disks	rg-prd-app02	eastus	Contoso-Production	Premium_LRS
vm-prd-005_OsDisk	Managed disks	rg-prd-app02	eastus	Contoso-Production	Premium_LRS
vm-prd-009_OsDisk	Managed disks	rg-prd-app02	eastus	Contoso-Production	Premium_LRS
vm-prd-013_OsDisk	Managed disks	rg-prd-app02	westeurope	Contoso-Production	Premium_LRS
vm-prd-001	Virtual machines	rg-prd-app02	eastus	Contoso-Production	
vm-prd-005	Virtual machines	rg-prd-app02	eastus	Contoso-Production	
vm-prd-009	Virtual machines	rg-prd-app02	eastus	Contoso-Production	
vm-prd-013	Virtual machines	rg-prd-app02	westeurope	Contoso-Production	
nic-prd-001	Network interfaces	rg-prd-app02	eastus	Contoso-Production	
nic-prd-005	Network interfaces	rg-prd-app02	eastus	Contoso-Production	
nic-prd-009	Network interfaces	rg-prd-app02	eastus	Contoso-Production	
nic-prd-013	Network interfaces	rg-prd-app02	westeurope	Contoso-Production	
vm-prd-002_OsDisk	Managed disks	rg-prd-app03	uksouth	Contoso-Production	Premium_LRS
vm-prd-006_OsDisk	Managed disks	rg-prd-app03	eastus	Contoso-Production	Premium_LRS
vm-prd-010_OsDisk	Managed disks	rg-prd-app03	westeurope	Contoso-Production	Premium_LRS
vm-prd-002	Virtual machines	rg-prd-app03	uksouth	Contoso-Production	
vm-prd-006	Virtual machines	rg-prd-app03	eastus	Contoso-Production	
vm-prd-010	Virtual machines	rg-prd-app03	westeurope	Contoso-Production	
nic-prd-002	Network interfaces	rg-prd-app03	uksouth	Contoso-Production	
nic-prd-006	Network interfaces	rg-prd-app03	eastus	Contoso-Production	
nic-prd-010	Network interfaces	rg-prd-app03	westeurope	Contoso-Production	
vm-prd-003_OsDisk	Managed disks	rg-prd-app04	westeurope	Contoso-Production	Premium_LRS
vm-prd-007_OsDisk	Managed disks	rg-prd-app04	eastus	Contoso-Production	Premium_LRS
vm-prd-011_OsDisk	Managed disks	rg-prd-app04	uksouth	Contoso-Production	Premium_LRS
vm-prd-003	Virtual machines	rg-prd-app04	westeurope	Contoso-Production	

Name	Type	Resource group	Location	Subscription	SKU
vm-prd-007	Virtual machines	rg-prd-app04	eastus	Contoso-Production	
vm-prd-011	Virtual machines	rg-prd-app04	uksouth	Contoso-Production	
nic-prd-003	Network interfaces	rg-prd-app04	westeurope	Contoso-Production	
nic-prd-007	Network interfaces	rg-prd-app04	eastus	Contoso-Production	
nic-prd-011	Network interfaces	rg-prd-app04	uksouth	Contoso-Production	
sql-prd-01	SQL servers	rg-prd-data	centralindia	Contoso-Production	
sql-prd-01/db0	SQL databases	rg-prd-data	eastus	Contoso-Production	GP_Gen5_2
sql-prd-01/db1	SQL databases	rg-prd-data	eastus	Contoso-Production	S1
sql-prd-01/db2	SQL databases	rg-prd-data	eastus	Contoso-Production	Basic
stprddata00	Storage accounts	rg-prd-data	centralindia	Contoso-Production	Standard_LRS
stprddata01	Storage accounts	rg-prd-data	westeurope	Contoso-Production	Standard_GRS
stprddata02	Storage accounts	rg-prd-data	centralindia	Contoso-Production	Standard_ZRS
stprddata03	Storage accounts	rg-prd-data	eastus	Contoso-Production	Standard_ZRS
stprddata04	Storage accounts	rg-prd-data	eastus	Contoso-Production	Standard_LRS
log-prd-01	Log Analytics workspaces	rg-prd-mon	eastus	Contoso-Production	
kv-prd-00	Key vaults	rg-prd-sec	eastus	Contoso-Production	
kv-prd-01	Key vaults	rg-prd-sec	westeurope	Contoso-Production	
asp-prd-00	App Service plans	rg-prd-web	westeurope	Contoso-Production	P1v3
asp-prd-01	App Service plans	rg-prd-web	westeurope	Contoso-Production	P1v3
app-prd-00	App Services	rg-prd-web	eastus	Contoso-Production	
app-prd-01	App Services	rg-prd-web	eastus	Contoso-Production	
app-prd-02	App Services	rg-prd-web	westeurope	Contoso-Production	
app-prd-03	App Services	rg-prd-web	eastus	Contoso-Production	