



jQuery - Chaining

[< Previous](#)[Next >](#)

With jQuery, you can chain together actions/methods.

Chaining allows us to run multiple jQuery methods (on the same element) within a single statement.

jQuery Method Chaining

Until now we have been writing jQuery statements one at a time (one after the other).

However, there is a technique called chaining, that allows us to run multiple jQuery commands, one after the other, on the same element(s).

Tip: This way, browsers do not have to find the same element(s) more than once.

To chain an action, you simply append the action to the previous action.

The following example chains together the `css()`, `slideUp()`, and `slideDown()` methods. The "p1" element first changes to red, then it slides up, and then it slides down:

Example

```
$("#p1").css("color", "red").slideUp(2000).slideDown(2000);
```



We could also have added more method calls if needed.

Tip: When chaining, the line of code could become quite long. However, jQuery is not very strict on the syntax; you can format it like you want, including line breaks and indentations.

This also works just fine:

Example

```
$("#p1").css("color", "red")  
    .slideUp(2000)  
    .slideDown(2000);
```

[Try it Yourself »](#)

jQuery throws away extra whitespace and executes the lines above as one long line of code.

[< Previous](#)[Next >](#)

W3schools Pathfinder

Track your progress - it's free!

[Sign Up](#)[Log in](#)

ADVERTISEMENT



Tutorials ▼

Exercises ▼


Services ▼



Sign Up

Log in

☰ . CSS JAVASCRIPT SQL PYTHON JAVA PHP HOW TO W3.CSS C

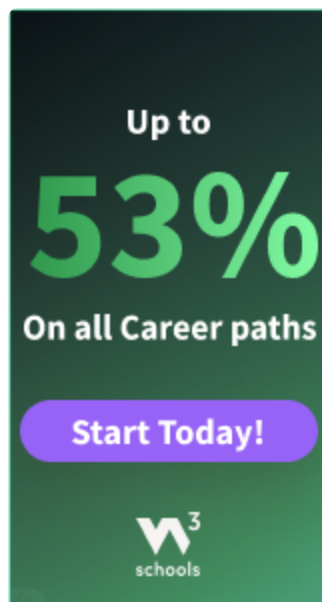

[Tutorials](#)▼[Exercises](#)▼[Services](#)▼[Sign Up](#)[Log in](#)[CSS](#) [JAVASCRIPT](#) [SQL](#) [PYTHON](#) [JAVA](#) [PHP](#) [HOW TO](#) [W3.CSS](#) [C](#)

ADVERTISEMENT

ADVERTISEMENT

[SPACES](#)[UPGRADE](#)[AD-FREE](#)[NEWSLETTER](#)[GET CERTIFIED](#)[CONTACT US](#)[Top Tutorials](#)[Top References](#)

[Tutorials ▼](#)[Exercises ▼](#)[Services ▼](#)[Sign Up](#)[Log in](#)[≡](#) [CSS](#) [JAVASCRIPT](#) [SQL](#) [PYTHON](#) [JAVA](#) [PHP](#) [HOW TO](#) [W3.CSS](#) [C](#)[W3.CSS Tutorial](#)
[Bootstrap Tutorial](#)
[PHP Tutorial](#)
[Java Tutorial](#)
[C++ Tutorial](#)
[jQuery Tutorial](#)

Top Examples

[HTML Examples](#)
[CSS Examples](#)
[JavaScript Examples](#)
[How To Examples](#)
[SQL Examples](#)
[Python Examples](#)
[W3.CSS Examples](#)
[Bootstrap Examples](#)
[PHP Examples](#)
[Java Examples](#)
[XML Examples](#)
[jQuery Examples](#)[Bootstrap Reference](#)
[PHP Reference](#)
[HTML Colors](#)
[Java Reference](#)
[Angular Reference](#)
[jQuery Reference](#)

Get Certified

[HTML Certificate](#)
[CSS Certificate](#)
[JavaScript Certificate](#)
[Front End Certificate](#)
[SQL Certificate](#)
[Python Certificate](#)
[PHP Certificate](#)
[jQuery Certificate](#)
[Java Certificate](#)
[C++ Certificate](#)
[C# Certificate](#)
[XML Certificate](#)[FORUM](#) [ABOUT](#) [CLASSROOM](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2024 by Refsnes Data. All Rights Reserved. [W3Schools is Powered by](#)

[Tutorials ▼](#)[Exercises ▼](#)[Services ▼](#)[Sign Up](#)[Log in](#)[CSS](#)[JAVASCRIPT](#)[SQL](#)[PYTHON](#)[JAVA](#)[PHP](#)[HOW TO](#)[W3.CSS](#)[C](#)