




Configmap

Overview






WHY **CONFIGMAP**?

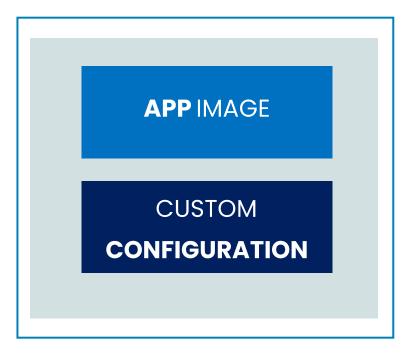






WHY **CONFIGMAP**?

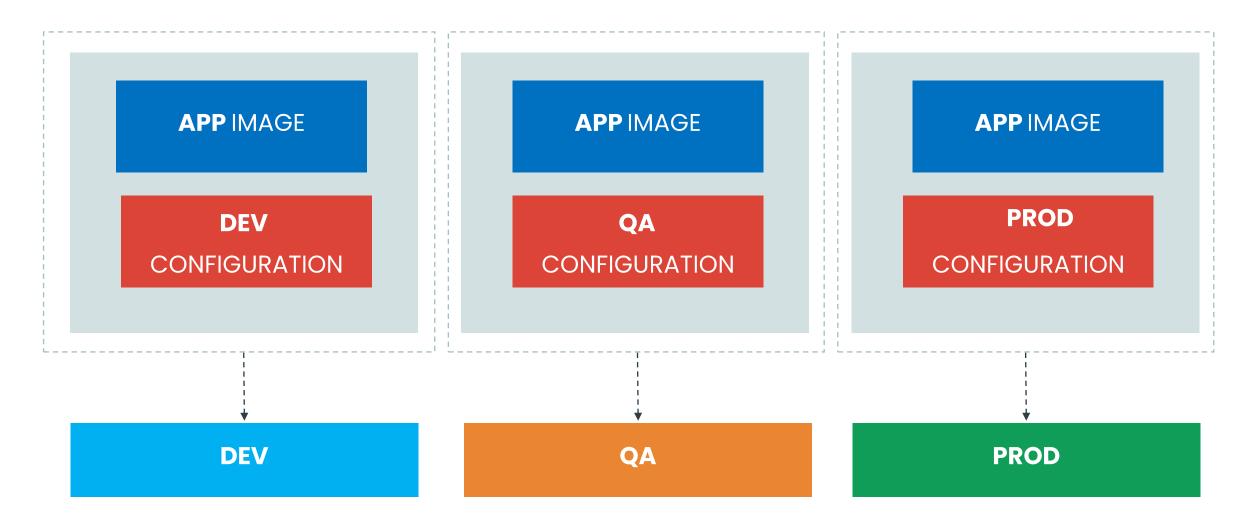




WHY **CONFIGMAP**?

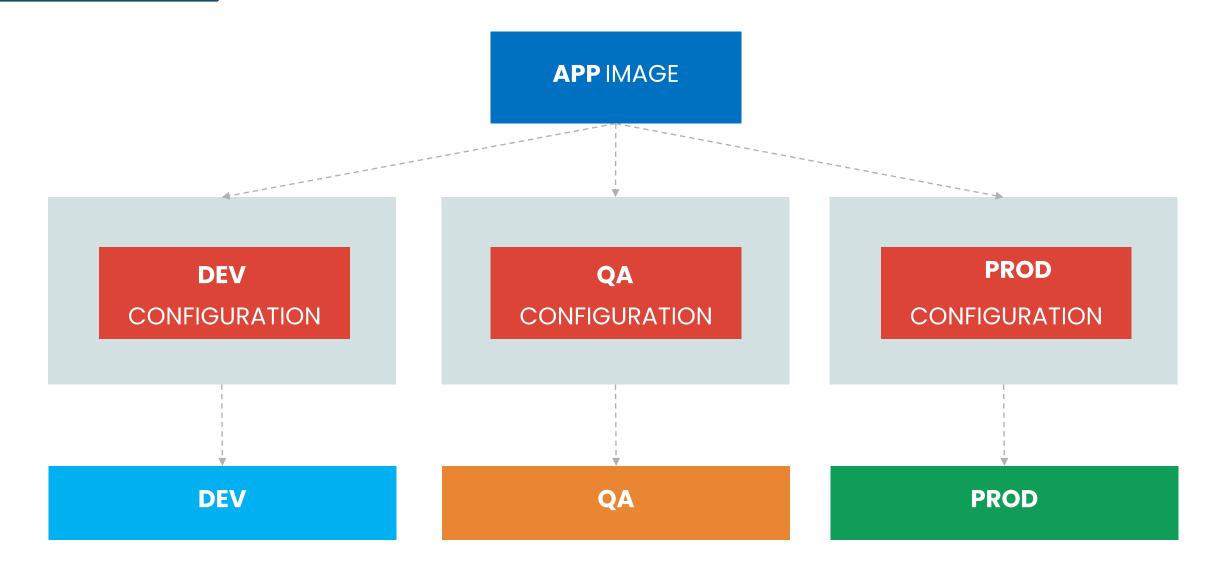



WHAT IS A **CONFIGMAP**?

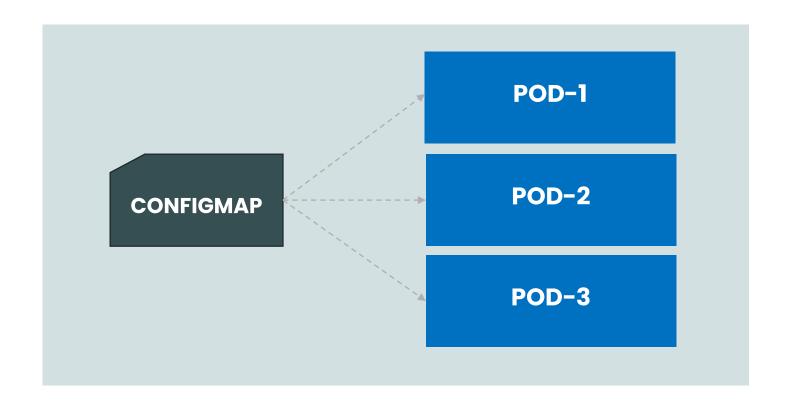



WHAT IS A CONFIGMAP?

```
KEY_1: value1
KEY_2: value2
KEY_3: value2
```

CONFIGMAP-1

```
File name
KEY: nginx.conf
Value:
http {
    include
                  /etc/nginx/mime.types;
    default_type application/octet-stream;
    log_format main '$remote_addr - $remote_user [$time_local] "$request" '
                      '$status $body_bytes_sent "$http_referer" '
                      '"$http user agent" "$http x forwarded for"';
                                                                                   File Contents
    access_log /var/log/nginx/access.log main;
    sendfile
                    on;
    #tcp_nopush
                    on;
    keepalive_timeout 65;
    #gzip on;
    include /etc/nginx/conf.d/*.conf;
```

CONFIGMAP-2



WHAT IS A **CONFIGMAP**?

