NIHVA TECHNOLOGIES			
WEIGHT ESTIMATION SHEET			
CLIENT	Shree Pre Fab	DATE	3/23/2024
PROJECT	Motorised Sliding Gate	LOCATION	Pune
FINISH SIZE	11 Metre x 1.4 Metre	PREPARED BY	Jayesh

SR	DESC	DETAILS	MATERIAL GRADE	SP.GRAVITY	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (12300mm X 1.4 mm)	Tube - Outer Frame	MS	7.85		80	80	3.2	27100	mm	1	214	331
		vertical Tube type 1 - Inner	MS	7.85		40	40	2.6	789	mm	80	57	Weight OF leaf
		Horizontal Tube Support for Cladding	MS	7.85		40	40	2.6	15520	mm	1	18	
		MS cladding Sheet	MS	7.85			300	1.5	12140	mm	1	43	
2	Bottom Track	En 8 Bright Hardchrome Bar	En8	7.85	20				25	M	1	65	
		If ISMB 100 in our scope	MS	7.85					25	M	1	300	
		Equal angle	MS	7.85		65	65	6	25	M	2	299	
3	Post	Support Pipe	MS	7.85		80	80	3.6	1250	No's	3	32	
		Foundation Plate	MS	7.85		125	125	12	4	No's	6	9	
		Foundation + Top plate	MS	7.85		320	125	12	4	No's	3	11	
		Gate Stopper	MS	7.85		150	75	5.7	1.5	Metre	1	25	
										Weight For Required Qty	1	1073	
										Weight Including Safety Factor	1.5	1609	


Mode Of Operation = Motorised

Motor Selection = According | 496.8 | kg


Weight As per Provided Reference Drawing

CD between 2 consecutive tubes= 110 mm

REFERENCE IMAGE

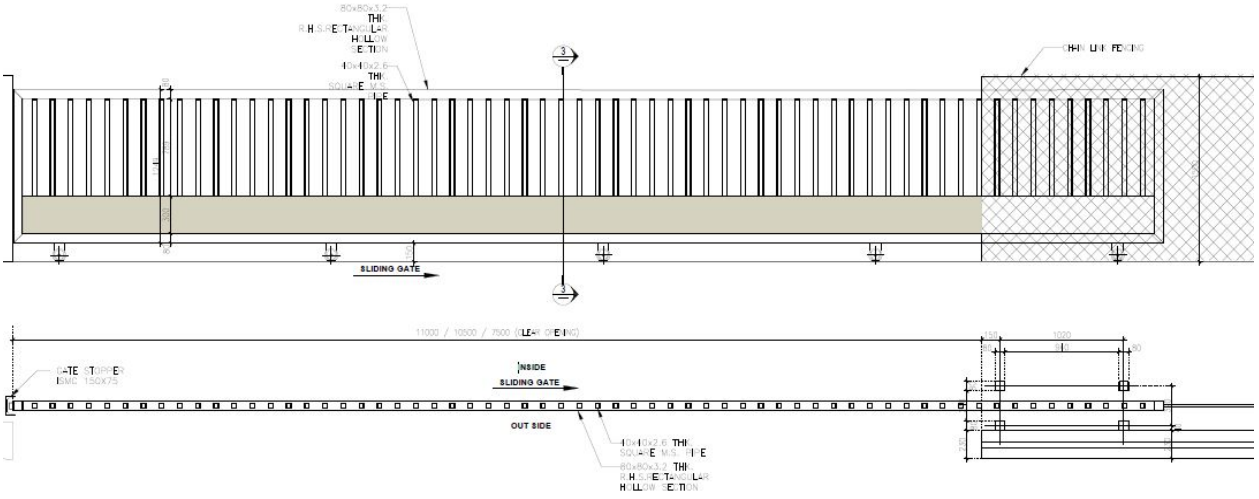

GATE



FOUNDATION

NIHVA TECHNOLOGIES			
WEIGHT ESTIMATION SHEET			
CLIENT	Shree Pre Fab	DATE	3/23/2024
PROJECT	Motorised Sliding Gate	LOCATION	Pune
FINISH SIZE	10.5 Metre x 1.4 Metre	PREPARED BY	Jayesh

SR	DESC	DETAILS	MATERIAL GRADE	SP.GRAVITY	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (11800 mm X 1400 mm)	Tube - Outer Frame	MS	7.85		80	80	3.2	26100	mm	1	206	319
		vertical Tube type 1 - Inner	MS	7.85		40	40	2.6	789	mm	77	55	Weight OF leaf
		Horizontal Tube Support for Cladding	MS	7.85		40	40	2.6	15020	mm	1	17	
		MS cladding Sheet	MS	7.85			300	1.5	11640	mm	1	41	
2	Bottom Track	En 8 Bright Hardchrome Bar	En8	7.85	20				24	M	1	62	
		If ISMB 100 in our scope	MS	7.85					24	M	1	288	
		Equal angle	MS	7.85		65	65	6	24	M	2	287	
3	Post	Support Pipe	MS	7.85		80	80	3.6	1250	No's	3	32	
		Foundation Plate	MS	7.85		125	125	12		No's	6	9	
		Foundation + Top plate	MS	7.85		320	125	12		No's	3	11	
		Gate Stopper	MS	7.85		150	75	5.7	1.5	Metre	1	25	
										Weight For Required Qty	1	1034	
										Weight Including Safety Factor	1.5	1551	


Mode Of Operation = Motorised

Motor Selection = According | 479.1 | kg


Weight As per Provided Reference Drawing

CD between 2 consecutive tubes= 110 mm

REFERENCE IMAGE

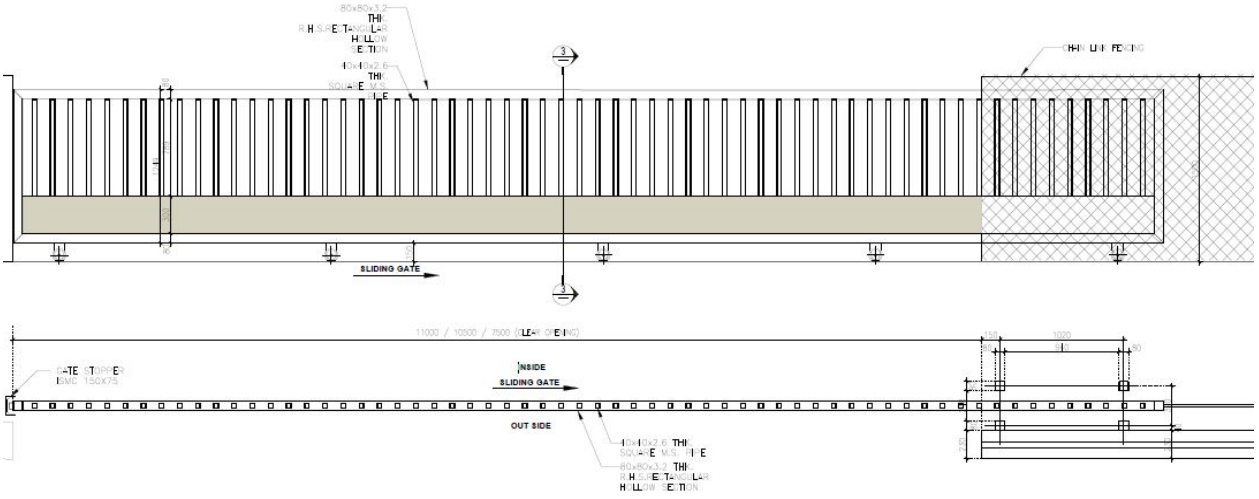

GATE



FOUNDATION

NIHVA TECHNOLOGIES			
WEIGHT ESTIMATION SHEET			
CLIENT	Shree Pre Fab	DATE	3/23/2024
PROJECT	Motorised Sliding Gate	LOCATION	Pune
FINISH SIZE	10.5 Metre x 1.4 Metre	PREPARED BY	Jayesh

SR	DESC	DETAILS	MATERIAL GRADE	SP.GRAVITY	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (11800 mm X 1400 mm)	Tube - Outer Frame	MS	7.85		80	80	3.2	17500	mm	1	140	226
		vertical Tube type 1 - Inner	MS	7.85		40	40	2.6	789	mm	56	41	Weight OF leaf
		Horizontal Tube Support for Cladding	MS	7.85		40	40	2.6	11880	mm	1	15	
		MS cladding Sheet	MS	7.85			300	1.5	8540	mm	1	30	
2	Bottom Track	En 8 Bright Hardchrome Bar	En8	7.85	20				19	M	1	50	
		If ISMB 100 in our scope	MS	7.85					19	M	1	228	
		Equal angle	MS	7.85		65	65	6	19	M	2	227	
3	Post	Support Pipe	MS	7.85		80	80	3.6	1250	No's	3	32	
		Foundation Plate	MS	7.85		125	125	12		No's	6	9	
		Foundation + Top plate	MS	7.85		320	125	12		No's	3	11	
		Gate Stopper	MS	7.85		150	75	5.7	1.5	Metre	1	25	
										Weight For Required Qty	1	809	
										Weight Including Safety Factor	1.5	1213	


Mode Of Operation = Motorised

Motor Selection = According | 339.0 | kg


Weight As per Provided Reference Drawing

CD between 2 consecutive tubes= 110 mm

REFERENCE IMAGE

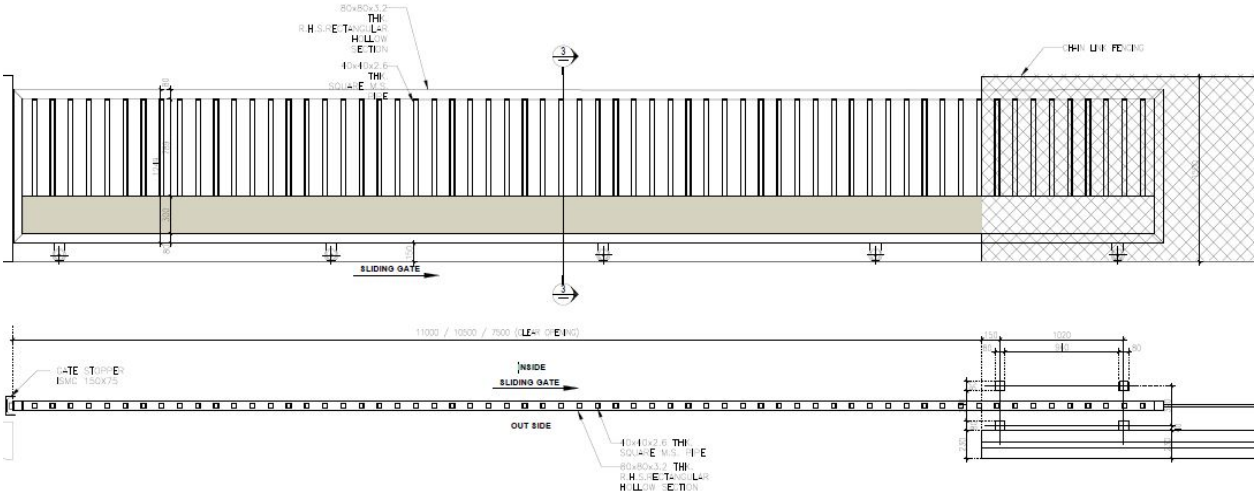

GATE



FOUNDATION

SR	SEGMENT	SIZE		TOTAL WEIGHT	
		WIDTH	HEIGHT	ACTUAL	WITH 1.5 F.O.S.
1	Motorised Sliding Gate	11000	1400	1073	1609
2	Motorised Sliding Gate	10500	1400	1034	1551
3	Motorised Sliding Gate	7500	1400	809	1213