
DRAWING

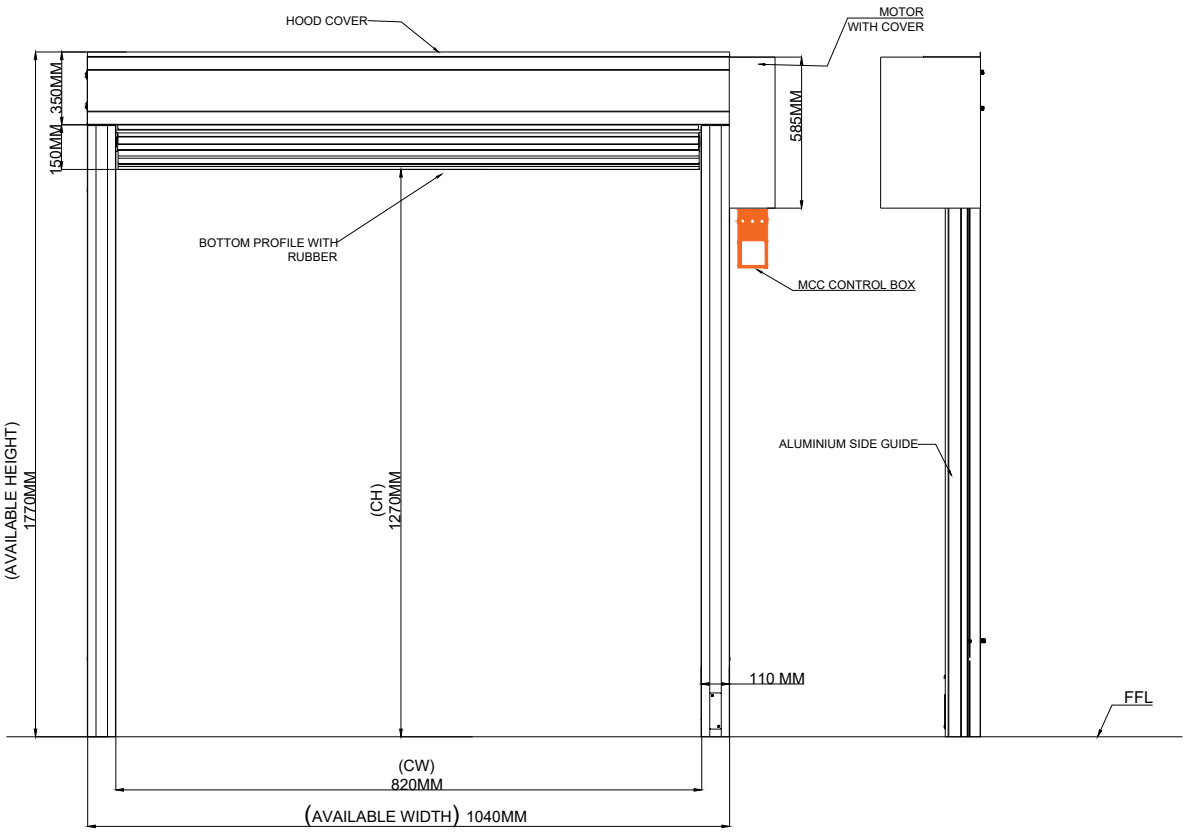

TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	DOOR VISION	VERTICAL RAPID ROLLER DOOR FOR MACHINE PROTECTION
2	SIDE FRAMES	AL ANODIZED 2 PART WHICH HAVE EASY ACCESS TO SERVICE & SWITCH
3	BOTTOM BEAM	AL ANODIZED
4	DOOR TRAVEL SPEED	OPENING: UPTO 2.5M/SEC & CLOSING: 1.7 M/SEC
5	RAL CODE	ORANGE
6	CONTROL SYSTEM	CONTROL SYSTEM MCC7110 VECTOR CONTROL, INCL. DISPLAY & BLACK MAIN SWITCH IN COMBIBOX
7	SAFETY LIMIT SWITCH	1 PC SCHMERSAL MAGNET SWITCH BAS 33-02z-2187 ST + MAGNET BPW 33-2326 MOUNTED IN SIDE FREAM
8	PRE-RUNNING PHOTOCELL	BOTTOM BEAM WITH PRE-RUNNING PHOTOCELL (WITHOUT CONTACT EDGE) WITH CABLE CHAIN INSIDE FRAME (ONLY AVAILABLE WITH MCC CONTROL)
9	INTERFACE CARD	MCC WITHOUT DISPLAY UNIT, WITH COMBIBOX IN PLASTIC (175X250X150MM) WITH INTERFACE CARD AND MAIN SWITCH INCLUDED IN COMBIBOX INCLUDING POWER & INTERFACE CABLE.

MACHINE PROTECTION DOOR SIZES :-

SR	AVAILABLE WIDTH	AVAILABLE HEIGHT	QTY
1	**1040**	**1770**	04

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	**820**	**1270**	04

NOTE :

All DIMENSIONS ARE IN MM.
STU. IN CLIENT SCOPE.

SPECIAL INSTRUCTION'S :

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - DOOR AUTOMATION

DWG NO - NTPL-315-PM-01

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE
DRAWN	J.P.		08-12-2025
CHK'D	B.S.		08-12-2025
APPV'D	V.T.		08-12-2025

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM' A2

PRODUCT - MACHINE PROTECTION DOOR

PROJECT NO - NTPL- 315 REVISION - 00

SITE LOCATION - GURUGRAM

MATERIAL - QTY - 1

PROJECTION METHOD

SCALE :

SHEET 1 OF 1