


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2200	2770	560	400
PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	
	2300	2770	570	

NOTE : ALL DIMENSIONS ARE IN mm




VIEW A




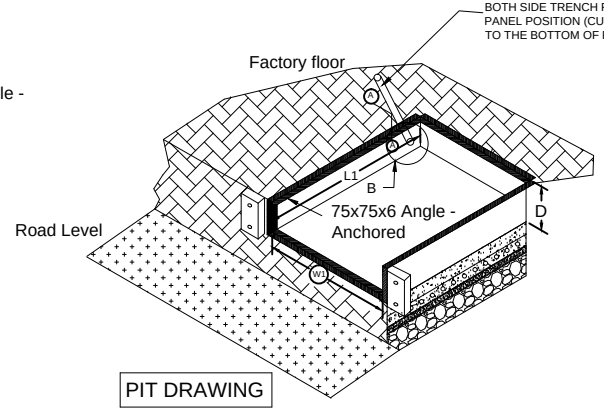

PIT DRAWING

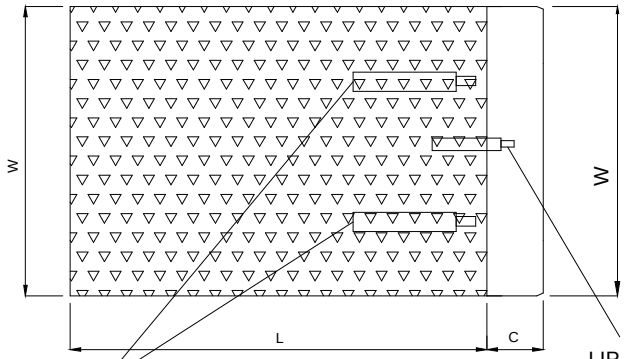

COLOR :- 1. TOP DECK - GOLDEN YELLOW.
2. BASE FRAME - BLACK.

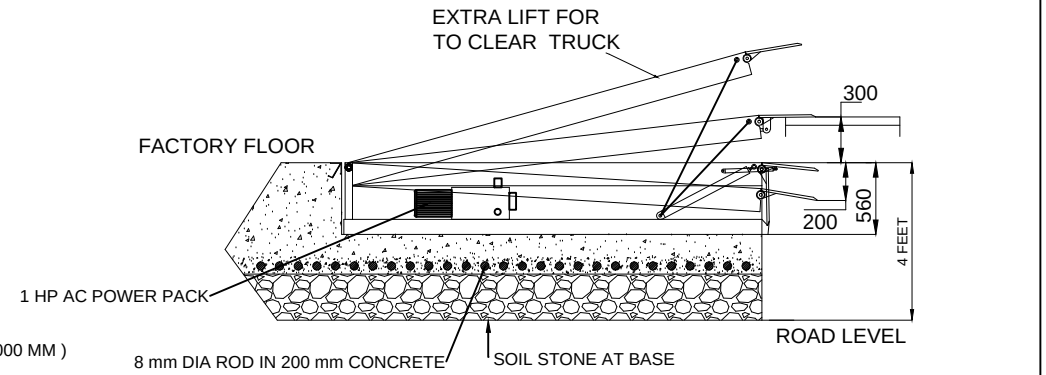

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER - 10 TON CAPACITY - 02 NOS

IMP NOTE: -
1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
2.HYDRAULIC CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

CLIENT APPORVAL-			
		DATE	SIGN.
DRAWN	P.A	31.12.2018	
CHECKED	V.T	31.12.2018	
APPROVED			
ALL DIMENSION ARE IN mm			
If any queries contact : design@nihva.com			

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -
PROJECT -
LOCATION - REV:- 00
DWG. NO. - NIHVA/18-19/MFG/NDL385&386/011