Folding door
Crawford FD2150P

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in door opening solutions



Robust aluminum framed folding door

Crawford FD2150P is designed to be a strong, stable and robust folding door. It delivers a unique mix of safety, reliability, ease of opening and optimal space-saving. This smart sideways folding door is so easy to open, even after long periods. Crawford FD2150P is the perfect choice for the unique needs of the farming, construction, industrial and automotive industries.

Crawford FD2150P comes with a tight, well-sealed and high wind load resistance to take whatever the weather throws at it. This smart, economical folding door gives you the peace of mind and protection you need.

Built for premises where space around the door is limited, Crawford FD2150P provides the perfect fit. It's available in a range of sizes, configurations, opening, locking, folding and color options.

Manufacturing with durable materials including an aluminum frame, and with few moving parts, this door is an excellent choice for years of reliable and secure use.

Low maintenance costs
Crawford folding doors contain few moving parts, which means less wear and tear and, consequently, less maintenance.

High safety and security
The entire door opening process is visible, reducing the risk for unnecessary collisions. A pedestrian passdoor can be integrated in a section of the main door. Manual doors are supplied with integrated Cremone lock bolt and handle inside as option. Cylinder locks are available as options.


Working environment and ergonomics
The safety features together with a high insulation value, contribute to a safe and good working environment. This door is easy to operate, thanks to the ergonomic design in the small details.

Technical Data

Standard size up to (W x H)[1]	5000 x 5000 mm
Door leaf thickness	50 mm
Windows	rectangular, in 3 different sizes
Colours standard optional	 5 unlimited
Pass-door (optional)	built in doorleaf doorleaf as a pass-door
Thermal transmittance, EN 12428[2]	1,6 W/ (m^2K)
Wind load, EN 12424[3]	class 5
Air permeability, EN 12426	class 4
Water penetration, EN 12425	class 3


1) Other sizes available on request
2) 4000 x 4000 mm, 2 + 2
3) 5000 x 5000 mm, 2 + 2

Dimensional specifications

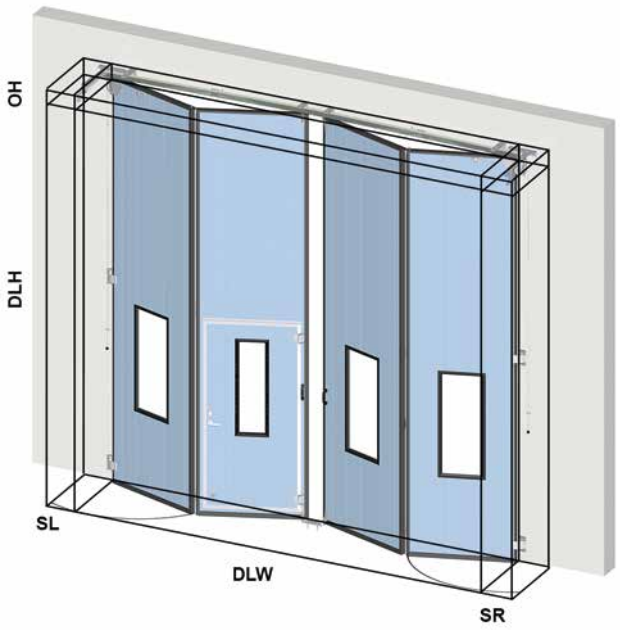

DLW = Daylight Width
DLH = Daylight Height
OH = Headroom
SL = Side space Left
SR = Side space Right
D = Depth

Configuration	Manual		
	SL	SR	OH
0 + 2	105	230	130
2 + 0	230	105	130
1 + 2, 2 + 1	230	230	130
2 + 2	230	230	130



Windows



All windows are double sided insulated hardened glass.
The window frame is made of black polycarbonate and is burglar proof.

Different sizes available:
- 410 x 505 mm
- 410 x 1105 mm
- 245 x 555 mm
- 260 x 405 mm (for pass-door)
- 260 x 1005 mm (for pass-door)

Handles and locks



For the Crawford FD2150P a handle and a cremone lock can be used.
The cremone lock works without a key, althoug a separate key and cylinder can be installed for extra security.

Standard available outside colours

Red RAL 3002

Blue RAL 5010

Anthracite grey RAL 7016

On request — Other colours

Grey white RAL 9002

Light grey RAL 9006

ASSA ABLOY, Besam, Crawford, Megadoor and Albany, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies with in the ASSA ABLOY Group.

Q4.0-2014 © ASSA ABLOY Entrance Systems AB Technical data subject to change without notice.