

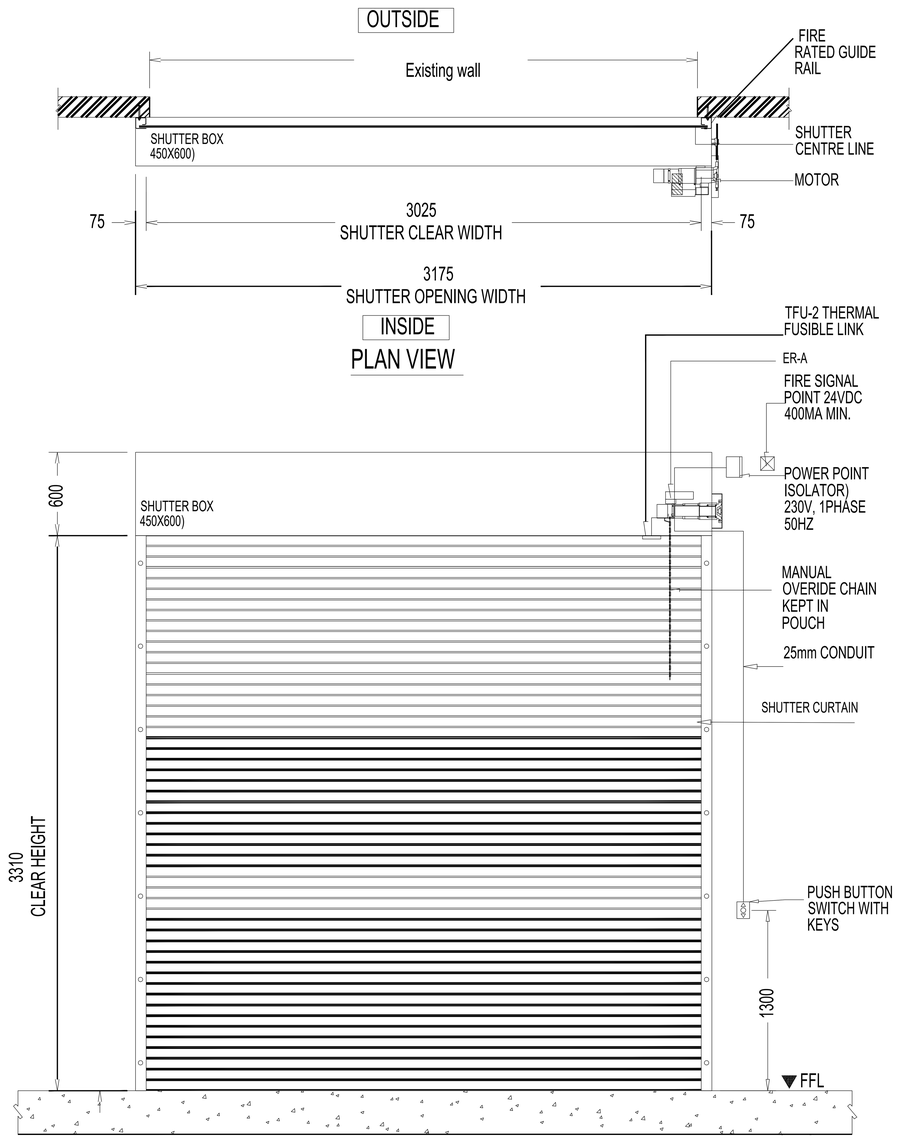



PLAN VIEW


ELEVATION VIEW

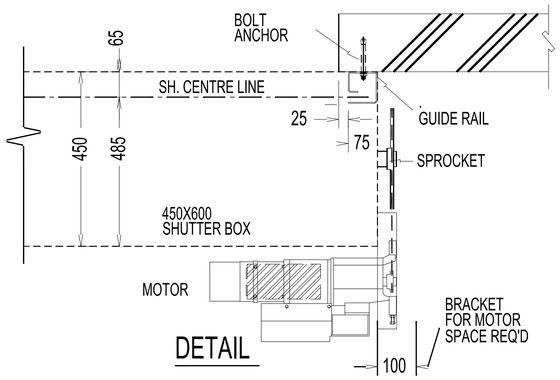



DETAIL

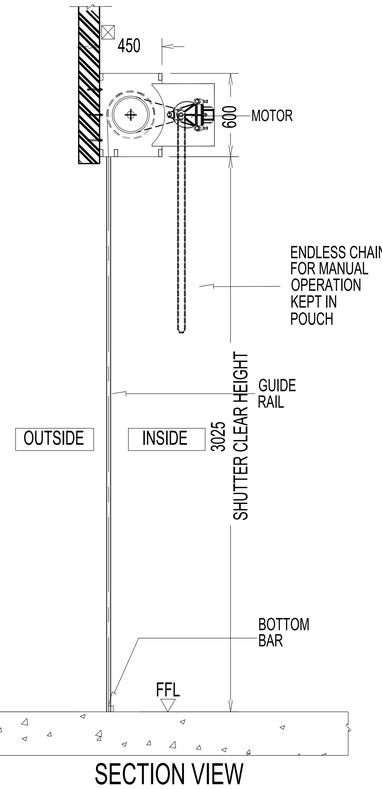


SECTION VIEW

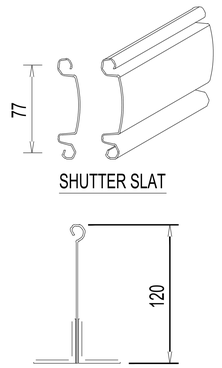


GALVANISED STEEL GUIDE RAIL




PUSH BUTTON

## TECHNICAL SPECIFICATIONS :

| Sr .No. | Specification | Description |
|---|---|---|
| 1 | **Certification** | BS 476 Part 22 & MS 1073 Part 3 1988<br>Tested in Warrington Fire Reasearch Centre UK & Sirim Malasiya |
| 2 | **Shutter Curtain** | Roll formed from 1st grade BHP Zincalume steel SKB-A7 curve slat curtain |
| 3 | **Guide Rail** | Fabricated from hot-dipped galvanised steel of 3.0 mm with one piece design surface mounted type. |
| 4 | **Bottom Bar** | Assembled of 2 Pieces of 38 x 38 x 3 mm galvanised steel angle bolted 800 mm pitch with galvanised bolts and nuts or 2 pieces of 40 x 40 x 6 mm steel flat bar. |
| 5 | **Shutter Enclosure Box** | Pressed Galvanised steel sheet to suite box size comply to fire test approved thickness. |
| 6 | **Operation Control** | Gear motor with Thermal protector, limit switches, manual overide, c/w push button switch with keys lockable. |
| 7 | **Motor Drive Unit** | Power Source: 110v 60Hz 1 phase<br>220v 60Hz 1 phase<br>230v 50Hz 1 phase<br>400v 50Hz 3 phase<br>Manual Chain Override<br>One unit push button switch<br>Gravity drop level<br>Auto close by relay switch after receive of 24vdc fire signal |
| 8 | **Fire Mode** | Fire Shutter will auto close via upon receiving of 24VDC fire signal |

## SIZES :

| SHUTTER NO. | CLEAR WIDTH | CLEAR HEIGHT | MOTOR POSITION | QTY |
|---|---|---|---|---|
| 01 | 3025 mm | 3310 mm | RIGHT | 01 |

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :-
MOTORISED FIRE RATED ROLLING SHUTTER

| | NAME | DATE |
|---|---|---|
| DRAWN | S.J. | 03/10/2024 |
| CHECK | S.W. | 03/10/2024 |
| APPROVAL | V.T. | 03/10/2024 |

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - TATA MOTOR

PROJECT -MOTORISED FIRE RATED ROLLING SHUTTER

DWG. NO. : NIHVA-24-25-00XX | REV-00

SCALE: NTS | WT: | SHEET: 01 OF 01

If any queries contact : design@nihva.com