
W=600
7
SELF THREADING SCREW
2100
1800 (DOOR FRAME HEIGHT)
1000
300
F.F.L.

TD1 - 600X1800MM
STEEL DOOR SINGLE LEAF

FRAME SIZE: 100 X 58 MM ;FRAME SHEET: 1.2MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 0.8MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
3	EACH	HINGES BB 4330, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	EACH	MORTICE SHAFT DEAD LOCK WITH ALLEN KEY 8681, SSS	DORMA	SSS
1	EACH	FLUSH PULL HANDLE 1208, RECTANGULAR, SSS	DORMA	SSS
6	MT	HORMANN PRODUCT CODE NO: 547853-SEALING FOR FRAME C 420 GREY HRM	HORMANN	GREY

QUANTITY:

CAR AND FACTORY:	--	DPG:	--
NMX:	03	UG SUMP:	--
OFFICE BUILDING:	--	SECURITY KIOSK:	--
CAFETERIA:	33	COMPRESSOR ROOM:	02
SUBSTATION:	--	TOTAL NOS:	38 NOS


W=600
7
SELF THREADING SCREW
2100
1350 (DOOR FRAME HEIGHT)
750
F.F.L.

TD1a - 600X1350MM
STEEL DOOR SINGLE LEAF

FRAME SIZE: 100 X 58 MM ;FRAME SHEET: 1.2MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 0.8MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
3	EACH	HINGES BB 4330, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	EACH	MORTICE SHAFT DEAD LOCK WITH ALLEN KEY 8681, SSS	DORMA	SSS
1	EACH	FLUSH PULL HANDLE 1208, RECTANGULAR, SSS	DORMA	SSS
6	MT	HORMANN PRODUCT CODE NO: 547853-SEALING FOR FRAME C 420 GREY HRM	HORMANN	GREY

QUANTITY:

CAR AND FACTORY:	--	DPG:	--
NMX:	07	UG SUMP:	--
OFFICE BUILDING:	03	SECURITY KIOSK:	--
CAFETERIA:	01	COMPRESSOR ROOM:	--
SUBSTATION:	--	TOTAL NOS:	11 NOS

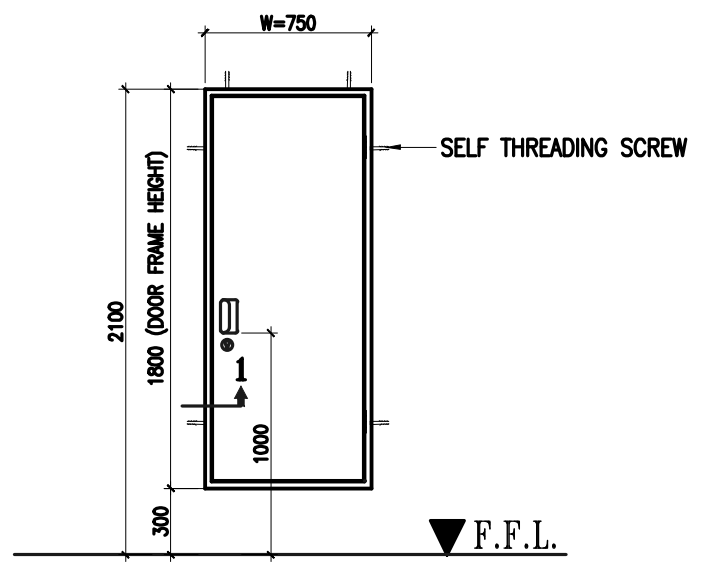
W=750
SELF THREADING SCREW
2100
1800 (DOOR FRAME HEIGHT)
1
1000
300
F.F.L.

TD2 - 750X1800MM
STEEL DOOR SINGLE LEAF

FRAME SIZE: 100 X 58 MM ;FRAME SHEET: 1.2MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 0.8MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
3	EACH	HINGES BB 4330, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	EACH	MORTICE SHAFT DEAD LOCK WITH ALLEN KEY 8681, SSS	DORMA	SSS
1	EACH	FLUSH PULL HANDLE 1208, RECTANGULAR, SSS	DORMA	SSS
6	MT	HORMANN PRODUCT CODE NO: 547853-SEALING FOR FRAME C 420 GREY HRM	HORMANN	GREY

QUANTITY:

CAR AND FACTORY:	05	DPG:	--
NMX:	--	UG SUMP:	--
OFFICE BUILDING:	--	SECURITY KIOSK:	--
CAFETERIA:	05	COMPRESSOR ROOM:	--
SUBSTATION:	04	TOTAL NOS:	14 NOS

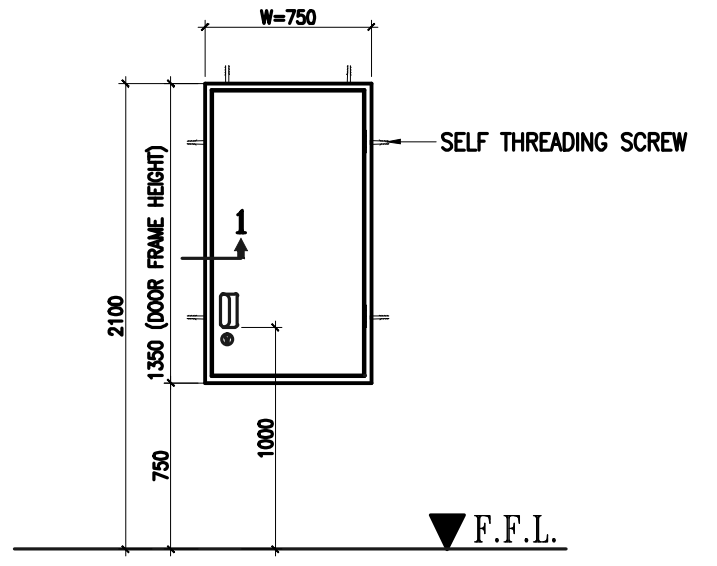
W=750
SELF THREADING SCREW
2100
1350 (DOOR FRAME HEIGHT)
1
1000
750
F.F.L.

TD2a - 750X1350MM
STEEL DOOR SINGLE LEAF

FRAME SIZE: 100 X 58 MM ;FRAME SHEET: 1.2MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 0.8MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
3	EACH	HINGES BB 4330, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	EACH	MORTICE SHAFT DEAD LOCK WITH ALLEN KEY 8681, SSS	DORMA	SSS
1	EACH	FLUSH PULL HANDLE 1208, RECTANGULAR, SSS	DORMA	SSS
6	MT	HORMANN PRODUCT CODE NO: 547853-SEALING FOR FRAME C 420 GREY HRM	HORMANN	GREY

QUANTITY:

CAR AND FACTORY:	07	DPG:	--
NMX:	--	UG SUMP:	--
OFFICE BUILDING:	--	SECURITY KIOSK:	--
CAFETERIA:	02	COMPRESSOR ROOM:	--
SUBSTATION:	--	TOTAL NOS:	09 NOS

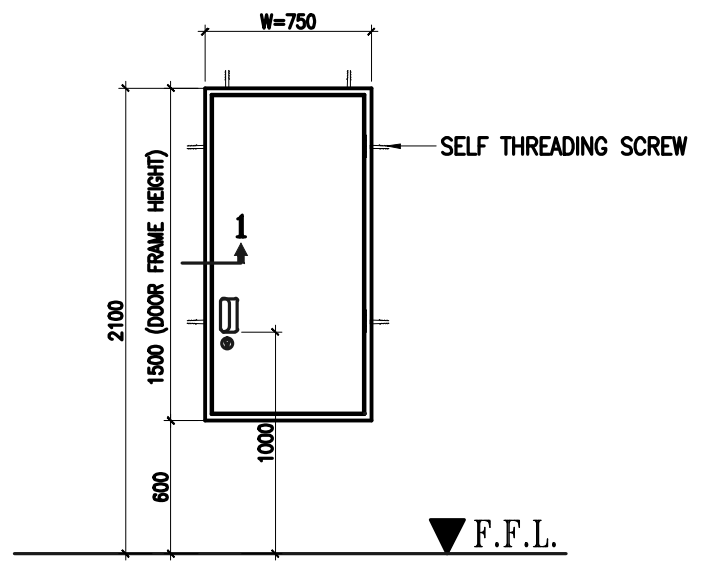
W=750
SELF THREADING SCREW
2100
1500 (DOOR FRAME HEIGHT)
1
1000
600
F.F.L.

TD2b - 750X1500MM
STEEL DOOR SINGLE LEAF

FRAME SIZE: 100 X 58 MM ;FRAME SHEET: 1.2MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 0.8MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
3	EACH	HINGES BB 4330, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	EACH	MORTICE SHAFT DEAD LOCK WITH ALLEN KEY 8681, SSS	DORMA	SSS
1	EACH	FLUSH PULL HANDLE 1208, RECTANGULAR, SSS	DORMA	SSS
6	MT	HORMANN PRODUCT CODE NO: 547853-SEALING FOR FRAME C 420 GREY HRM	HORMANN	GREY

QUANTITY:

CAR AND FACTORY:	--	DPG:	--
NMX:	--	UG SUMP:	--
OFFICE BUILDING:	--	SECURITY KIOSK:	--
CAFETERIA:	--	COMPRESSOR ROOM:	--
SUBSTATION:	01	TOTAL NOS:	01 NOS


W=1000
200
750
HINGES
SELF THREADING SCREW
2100
1800 (DOOR FRAME HEIGHT)
4
4
300
F.F.L.

TD3 - 1000X1800MM
STEEL DOOR DOUBLE LEAF WITH VISION PANEL

FRAME SIZE: 100 X 58 MM ;FRAME SHEET: 1.2MM ;DOOR LEAF: 46MM
SHUTTER SHEET: 0.8MM ;INFILL : HONEY COMB CORE

QTY	UNIT	PRODUCT DESCRIPTION	MFR	FIN
6	EACH	HINGES BB 4330, 5 KNL, 2 BALL BEARING BUTT HINGES SIZE 4" X 3" X 3MM SS 304	DORMA	SSS
1	EACH	MORTICE SHAFT DEAD LOCK WITH ALLEN KEY 8681, SSS	DORMA	SSS
2	EACH	LEVER ACTION FLUSH BOLT 3101-1, L=300MM, SC	DORMA	SC
2	EACH	FLUSH PULL HANDLE 1208, RECTANGULAR, SSS	DORMA	SSS
6	MT	HORMANN PRODUCT CODE NO: 547853-SEALING FOR FRAME C 420 GREY HRM	HORMANN	GREY

QUANTITY:

CAR AND FACTORY:	--	DPG:	--
NMX:	--	UG SUMP:	--
OFFICE BUILDING:	07	SECURITY KIOSK:	--
CAFETERIA:	04	COMPRESSOR ROOM:	--
SUBSTATION:	--	TOTAL NOS:	11 NOS

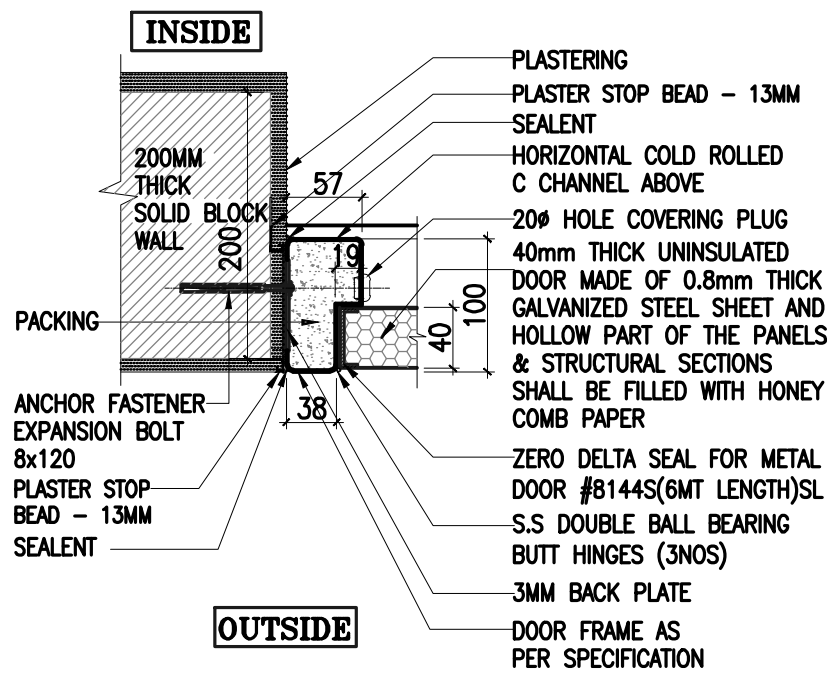
INSIDE
200MM THICK SOLID BLOCK WALL
200
57
19
100
40
38
PACKING
ANCHOR FASTENER EXPANSION BOLT 8x120
PLASTER STOP BEAD - 13MM
SEALENT
OUTSIDE
PLASTERING
PLASTER STOP BEAD - 13MM
SEALENT
HORIZONTAL COLD ROLLED C CHANNEL ABOVE
20ø HOLE COVERING PLUG
40mm THICK UNINSULATED DOOR MADE OF 0.8mm THICK GALVANIZED STEEL SHEET AND HOLLOW PART OF THE PANELS & STRUCTURAL SECTIONS SHALL BE FILLED WITH HONEY COMB PAPER
ZERO DELTA SEAL FOR METAL DOOR #8144S(6MT LENGTH)SL
S.S DOUBLE BALL BEARING BUTT HINGES (3NOS)
3MM BACK PLATE
DOOR FRAME AS PER SPECIFICATION

DETAIL 1 (FOR NON - FIRE RATED STEEL DOOR)
SCALE 1:5

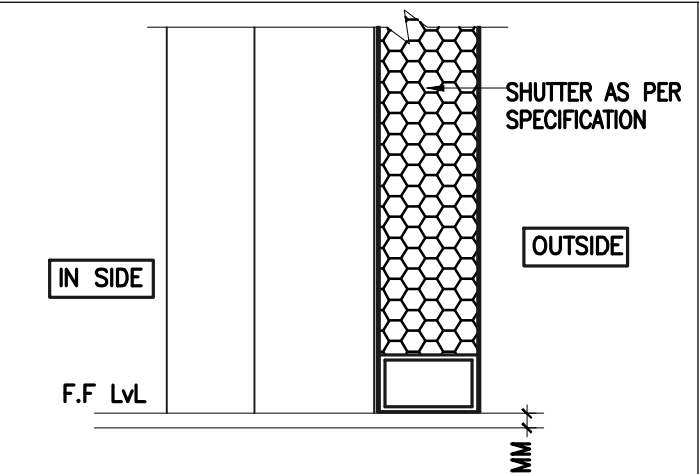
IN SIDE
OUTSIDE
SHUTTER AS PER SPECIFICATION
F.F LvL
9MM

DETAIL- 3 (FOR FIRE RATED STEEL DOOR)
SCALE 1:5

T3b


INSIDE
6MM GAP
SHUTTER AS PER SPECIFICATION
OUTSIDE
LIPPING ON BOTH SIDES

DETAIL- 4 (FOR FIRE RATED STEEL DOOR)
SCALE 1:5

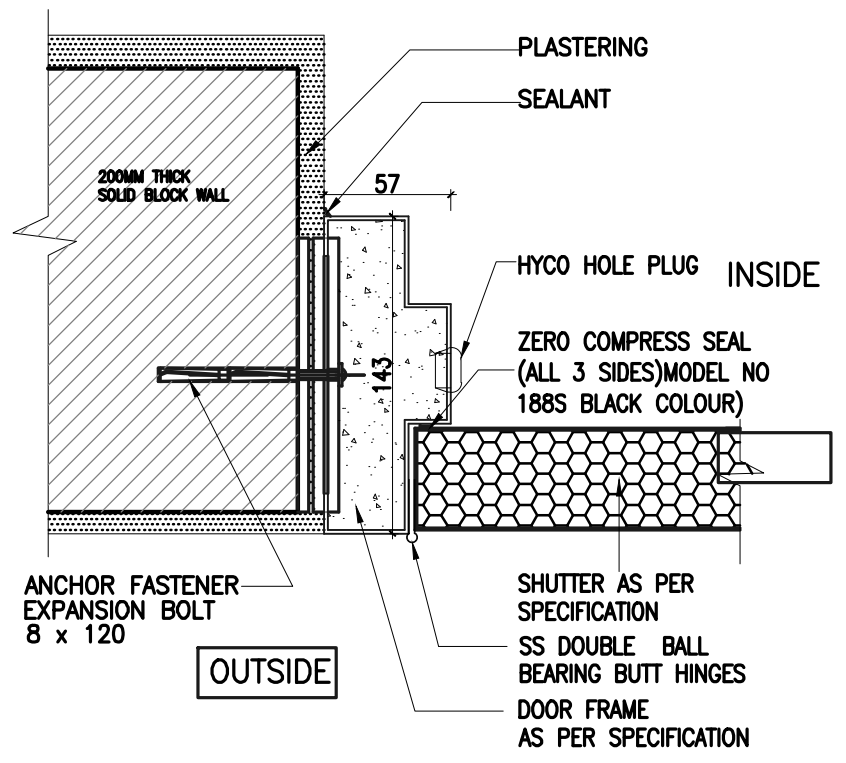
200MM THICK SOLID BLOCK WALL
57
143
PLASTERING
SEALANT
HYCO HOLE PLUG
INSIDE
ZERO COMPRESS SEAL (ALL 3 SIDES)MODEL NO 188S BLACK COLOUR)
ANCHOR FASTENER EXPANSION BOLT 8 x 120
OUTSIDE
SHUTTER AS PER SPECIFICATION
SS DOUBLE BALL BEARING BUTT HINGES
DOOR FRAME AS PER SPECIFICATION

DETAIL-2 (FOR FIRE RATED STEEL DOOR)
SCALE 1:5


45° MITER JOINT
INSIDE

DETAIL- 5

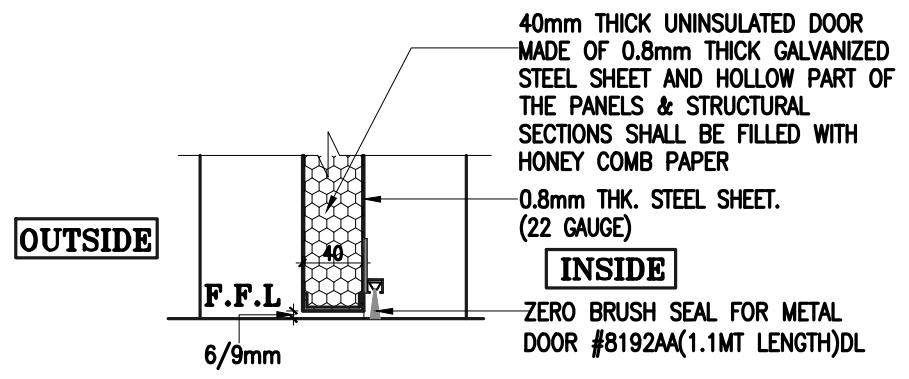
OUTSIDE
F.F.L
40
6/9mm
40mm THICK UNINSULATED DOOR MADE OF 0.8mm THICK GALVANIZED STEEL SHEET AND HOLLOW PART OF THE PANELS & STRUCTURAL SECTIONS SHALL BE FILLED WITH HONEY COMB PAPER
0.8mm THK. STEEL SHEET. (22 GAUGE)
INSIDE
ZERO BRUSH SEAL FOR METAL DOOR #8192AA(1.1MT LENGTH)DL

DETAIL- 6 (FOR NON - FIRE RATED STEEL DOOR)
SCALE 1:5

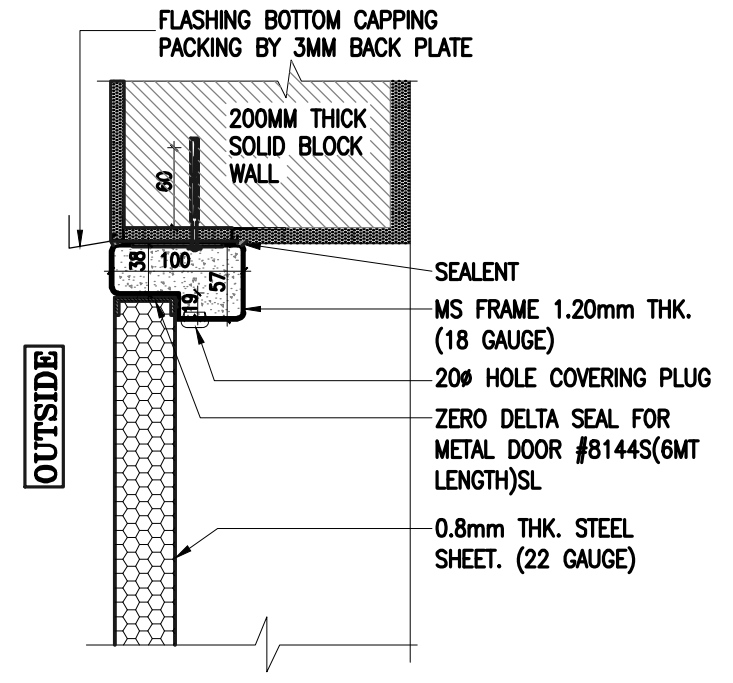
FLASHING BOTTOM CAPPING PACKING BY 3MM BACK PLATE
200MM THICK SOLID BLOCK WALL
60
38
100
57
19
OUTSIDE
SEALENT
MS FRAME 1.20mm THK. (18 GAUGE)
20ø HOLE COVERING PLUG
ZERO DELTA SEAL FOR METAL DOOR #8144S(6MT LENGTH)SL
0.8mm THK. STEEL SHEET. (22 GAUGE)

DETAIL- 7 (FOR NON - FIRE RATED STEEL DOOR)
SCALE 1:5



DETAIL- 8
(JAMB DETAIL-MULTI PURPOSE DOOR)


51
20
38
58
100

DETAIL- 9
(JAMB DETAIL-FIRE RATED DOOR)

KEY PLAN :-



LEGEND :-



GENERAL NOTES :
- ALL DIMENSIONS ARE IN MILLIMETRES AND ARE UNFINISHED DIMENSIONS UNLESS OTHERWISE SPECIFIED.
- ALL LEVELS ARE IN METRES AND ARE UNFINISHED LEVELS UNLESS OTHERWISE SPECIFIED.
- DO NOT SCALE DRAWINGS. ONLY WRITTEN DIMENSIONS SHALL BE FOLLOWED, ANY DISCREPANCIES NOTED SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT PRIOR TO EXECUTION.

REV.	DESCRIPTION	DATE	BY	CHD.
T4	ISSUED FOR TENDER	02.03.17	SOPI	V.A
T3b	REVISED AS PER CLIENT COMMENTS.	19.12.16	SOPI	V.A
T3a	ISSUED FOR CLIENT REVIEW	08.12.16	SOPI	V.A
T3	ISSUED AS ADDENDUM-4	02.05.15	CB	V.A
T2	ISSUED AS ADDENDUM	27.04.15	CB	V.A

AMENDMENT

GRAPHIC SCALE:
0.5M 0 0.5M 1.0M 2.0M 3.0M 4.0M 5.0M

CLIENT:
KONE ELEVATOR INDIA PVT. LTD.

PROJECT:
PROPOSED KONE ELEVATOR FACTORY
AT PILLAIPAKKAM, NEAR CHENNAI.

DRAWING TITLE:
JOINERY DETAILS - FIRE RATED AND
NON-FIRE RATED STEEL DOORS

SCALE : 1=30
DRAWN : CHINABABU
DATE : 24.11.2014
CHKD : V. ADHISIVAN
REV
DRAWING NO:
KEIPL-P-CAF-AR11-GR-02-188133
T4

ARCHITECTURE INTERIOR DESIGN ENGINEERING PLANNING CONSTRUCTION MANAGEMENT

CRN
C R NARAYANA RAO
10, KARPAGAMBAL NAGAR,
MYLAPORE, CHENNAI-600 004

B.Arch. (Hons.), M.Arch., (Calif.), F.I.I.A., Intl.Assoc.A.I.A.,
Registered Architect.

Construction work shall be executed only as per the latest revision drawing. Once a revision drawing is issued, the validity of the previous revision drawing stands cancelled and as such construction shall not be carried out as per superseded revisions. The Contractor is expected to:
1. Maintain a register of Drawing Receipts, listing drawing number & revision number, title, from whom received, date received, number of copies received, details of transmittal from the issuer & any other relevant details to be advised from time to time.
2. Archive all previous revision issues immediately upon receipt of a new revision and no superseded drawing shall remain in the site of works except in the Contractor's archives for record and reference purposes only.
3. While archiving superseded drawing, the Contractor is expected to stamp all previously issued drawings / prints appropriately, mentioning the date and revision number of the new revision on account of which the previous revision is archived.
4. The Contractor shall allow the representative of Client / PMC / Architect to inspect Contractor's archives for ensuring compliance.
5. Any work carried out by the Contractor using a superseded drawing after the issue of a new revision is liable for rejection and reinstatement as per new revision at Contractor's risk and cost without any entitlement to extension of time

THESE DRAWINGS ARE UNDER COPYRIGHT AND ARE THE PROPERTY OF CRN. NONE OF THE DRAWINGS AND RELATED DOCUMENTS CAN BE REPRODUCED, COPIED IN WHOLE OR IN PART WITHOUT PRIOR EXPRESSED WRITTEN CONSENT OF CRN. THESE DRAWINGS CANNOT BE HANDED OVER TO A THIRD PARTY OR USED FOR ANY PURPOSE, OTHER THAN THAT FOR WHICH IT HAS BEEN LOANED. AFTER FULFILLING THE PURPOSE OF ISSUE THE DRAWINGS SHALL BE RETURNED TO CRN.