2021

FILSILPEK SOLUTIONS PVT. LTD.
AHMEDABAD

NIKITA

06/12/2021

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

To,
Mr.Dnyaneshwar Kumbhar
9168940333
Nihva Technologies Pvt Ltd
187,G-Block,Thermax Chowk,
MIDC,Chinchwad,Pune-411019.

Sub: AUTOMATIC MACHINES FOR SYRUP

Dear Sir,

This is in reference to our telephonic discussion today in regarding your requirement Liquid Filling Machine We thank you for your interest in our machines and ensure you our best support and services. We propose the following set of machines for your requirement. Trust the enclosed details are as per your requirement. The proposed machines will best suit your application. Should you have any queries in these regards, please feel free to contact us anytime

Best Regards,

For,

FILSILPEK Solutions Pvt. Ltd

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Model No.	Description	Qty.	Price (Rs.)
FSP-BF-4	Turn Table 42”	1	80000/-



Description

Stainless steel Scrambler & Unscrambler, which is familiar as turn table. This is built on MS Square frame, solid guide rail & reduction gear box for jerk less & noiseless performance. Turntable is useful to ensure total synchronization, uniform flow of container and to take a turn at 90 degree to suit different machines and purposes for automatic transfer of container for further operation.

Operation

Container loaded on turn table manually or automatically will rotate on disc of turn table. During rotation of turn table, the container will be guided by a SS strip towards outlet path. The output of turn cable can be maintained by A.C. Frequency drive.

Technical Specifications

Direction	Clockwise / Anti clock wise as per requirement
RPM of Disc	Maintained by A.C. frequency drive
Power Consumption**	0.5 HP/ 415 volts / 50 Hz
Height of Disc	850 mm to 900 mm

Input Specification

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Container Size**	Round Shape	Ø 22 mm to Ø 100 mm Respectively height 58 mm to 240 mm (Height option for other bottle height available)

**** We can supply as per customer requirements.**

Salient Features

- Body from powder coated M.S. Angle encompassed with SS coverings.
- Turn table made of Alluminium disc. Cladded with SS 304 Quality.
- Suitable for different type of container.
- S.S. Elegantly Matt Finished Body.
- Matt Finished body.

Utility Requirement

Electrical supply	1 Phase + Neutral + Earthing
Electrical load	0.5 KW

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Model No.	Description	Qty.	Price (Rs.)
FSP-BF-53	8 Head Air jet cleaning vertical	1	4,50,000/-



Description

Automatic Vertical Air Jet Cleaning Machine work on positive air pressure & vacuum cleaning. The unit is made compact, versatile and enclosed in stainless steel elegantly matt finish body, consists of S.S. Slat Conveyor & Reciprocating cleaning nozzles. No container No cleaning system arrangement is standard features of the machine.
The main drive of the machine and conveyor drive consist of A/c Motor with synchronized variable A/c Frequency Drive.

Operation

Automatic Vertical Air Jet Cleaning Machine can accomplish a task by a photoelectric system, all the bottle should be cleaned before being filled, when an empty bottle arrives at the specified position, a cleaner comes down automatically until at the mouth of the bottle, then pure air is pressed into the bottle, and the impurity inside of the bottle is removed by vacuum system. This product conforms to the requirements of GMP completely.

Technical Specifications

Output / min*	60 BPM

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

No. of Cleaning Nozzles	8
Direction of Machine**	Left to right
Electrical Specification**	0.5 HP / 415 Volts / 50 Hz. Conveyor motor 2 HP / 415 Volts / 50 Hz. Vacuum Pump
Drive	Delta/Danfoss Make
Conveyor	SS Slat Chain SS304
Cleaning Cycle	Positive air pressure and vacuum cleaning
Working height	850 to 900 mm

***Depend upon operator, bottle size etc..**

**** We can supply as per customer requirements.**

Salient Features

- Positive air pressure and vacuum cleaning.
- Easy operation.
- Adjustable & diving type cleaning nozzles.
- Automatic loading and unloading of container.
- Individual control for air pressure and vacuum cleaning.
- Higher capacity blower to clean properly.
- S.S. pressure meter.


Utility Requirement

Electrical supply	3 Phase + Neutral + Earthing
Air Pressure: Minimum	400 Ltrs / Hr / Cycle / Pressure 2.5 Kg @ 20 CFM

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Model No.	Description	Qty.	Price (Rs.)
FSP-BF-154	**Automatic Eight Head Filling machine 500ml to 1000ml**	**1**	**5,50,000/-**

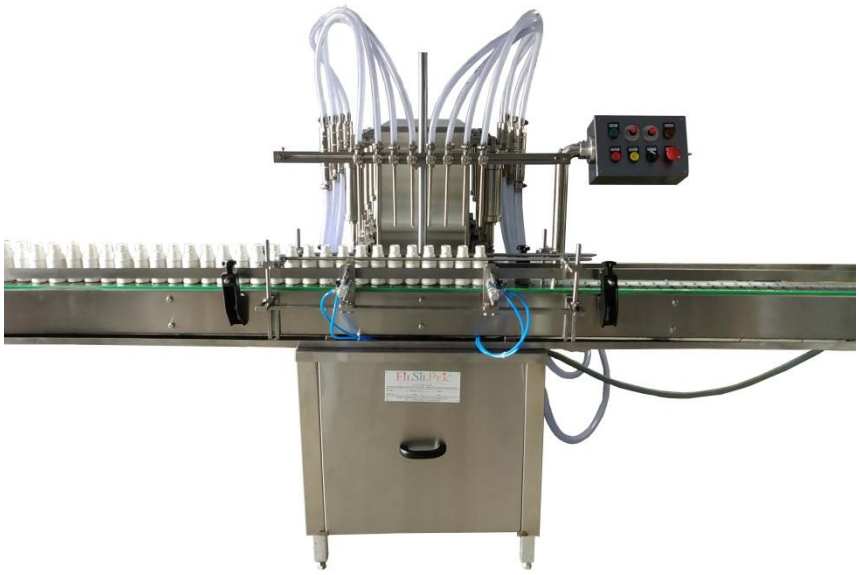

Description

Automatic Volumetric Liquid Bottle Filling Machine works on volumetric principle with diving nozzles. The unit is made compact, versatile and enclosed in stainless steel elegantly matt finish body, consists of S.S. Slat Conveyor, Reciprocating Nozzle with self-centering devices & SS Syringe. No container No filling system arrangement is standard features of the machine.

The main drive of the machine and conveyor drive consist of A/c Motor with synchronized variable A/c Frequency Drive.

Operation

Containers moving on SS Slat conveyor, feed below the filling nozzles through a settable twin pneumatically operated stopper system. The twin pneumatically operated stopper system and reciprocating nozzles can precisely match for centering

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

of container below nozzles, to avoid spillage of liquid on container.

To minimize foaming adjustable nozzle will reciprocate according to filling dose, nozzle will go upwards slowly from bottom level of bottle towards neck during filling. The dosing block with a hexagonal bolt fitted below syringes. This means fill size can be easily set.

Technical Specifications		
Filling Range***		500ml to 1000ml
Output/Min*		60 BPM based on 600ml
Direction of Movement		Left to Right
Number Of Head / Syringe		8 Nos.
Power Consumption	Main Machine	3 HP / 415 V / 50 HZ
	Conveyor	0.5 HP / 415 V / 50 HZ
Volume Setting		Volume Block Through
Filling System		Mechanical Piston Filler
Nozzle		Up – Down System
Drive		Delta/Danfoss Make
Conveyor		SS Slat Chain SS 304
Bottle Start-Stop		By Pneumatic Cylinder through
Height of Conveyor		850 mm to 900 mm Adjustable
Machine Dimensions**		2400 mm (L) x 950 mm (W) x 1800 (H) Approx.
Net Weight		650 Kgs. Approx.
Input Specification		
Container Neck Diameter**		Minimum 22 mm***
Container Size**	Round Shape	Ø 28 mm to Ø 100 mm Respectively height 58 mm to 240 mm (Height option for other bottle height available)
		15mm to 100 mm (Length)

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

	Flat / Square	Respectively 10mm to 50 mm (Width) Respectively height 58 mm x 240 mm (Height option for other bottle height available)

*** Depends on Container size, fill size, Neck diameter of container, and nature of liquid etc.**

**** We can supply as per customer requirements.**

***** With help of change parts.**

Salient Features

- ±1 % Filling accuracy on single dose.
- No Bottle No Filling System.
- Contact Parts made of S.S.316 And Non Contact Parts made of S.S.304
- Rigid vibration free construction for trouble free performance
- S.S. Elegantly matt finished body.
- Minimum charge overtime, from one size to another container or fill size.
- Self-lubricating UHMW-PE guide profile for S.S. slat chain provides low friction wear surface, smooth and noiseless conveying.
- Bottle Stopping arrangement through Pneumatic system.
- Synchronized two nos. A/c drives for main motor & conveyor belt.
- Safety guard for conveyor gearbox, motor and pneumatic cylinders.
- Inbuilt protection against over current, voltage fluctuation, short circuit in A/c frequency drive.
- Total GMP model.

Utility Requirement

Electrical supply	1 Phase + Neutral + Earthing

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

	Electrical load	2.2 KW
	Air Pressure	6 bar pressure 0.5 CFM

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Model No.	Description	Qty.	Price (Rs.)
FSP-BF-378	**Automatic Four Head Inner Capping Machine Pick and Place Change part cost extra**	**1**	**5,50,000/-**



Description

Automatic Multi Head Inner cap sealing machine is versatile, self-supported on stainless steel leg with height adjustable adjustment system. The machine is precision built on sturdy welded steel frame completely enclose in stainless steel sheet and doors are provided to facilitate the servicing of machine

Operation

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

The feed containers moving on conveyor belt are fed into an in-feed star wheel, bringing the container below the sealing head in the subsequent indexing part, mean while the rotating head pickup a cap from the cap star wheel which is receiving from delivery chute of cap filling bowl, where the body and the neck of the container are positioned below the Pressing head, where the sealing head is performing perfect operation of sealing, Pressing head is design to seal container according to pre-set torque.

Technical Specifications		
Output/Min*		60 BPM
Direction of Movement		Left to Right
No. of Sealing Head		4 Nos.
Power Consumption	Main Motor	1.5 HP / 415 Volts / 50 Hz.
	Cap Feeding Bowl	300 Watt, Magnetic coil
Height of Conveyor		860 mm to 910 mm
Caps Feeding		Vibratory Bowl Feeder
Conveyor		SS Slat chain SS304
Machine Dimensions**		1800 mm (L) x 900 mm (W) x 1800 (H) Approx.
Net Weight		650 Kgs. Approx.
Change parts required		**(A) Container: Star Wheel, Back Guide, Feed Worm** **(B) Cap Die, Delivery Chute, Bowl**
Input Specification		
Screw Cap Specification	Diameter**	19 mm to 38 mm***
	Height**	15 to 18.3 mm

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Container Size**	Round Shape	Ø 28 mm to Ø 100 mm Respectively height 58 mm to 240 mm (Height option for other bottle height available)
	Flat / Square	15mm to 100 mm (Length) Respectively 10mm to 50 mm (Width) Respectively height 58 mm x 240 mm (Height option for other bottle height available)

* **Depends on bottle size, cap size and type of cap.**

** **We can supply as per customer requirements.**

*** **With help of change parts.**

Salient Features

- No container No cap arrangement.
- SS elegantly matt finished body.
- Single motor synchronizes conveyor, star wheel.
- Adjustable height of conveyor belt, to align with other machine of the line.
- Sealing pressure can be varied to suit different gauges and size of caps.
- Low noise level, low power consumptions.
- Self-lubricating UHMW-PE guide profile for low friction wears surface, smooth and noiseless conveying.
- SS cladding or hard chrome plating of all exposed parts to ensure long life and resistance against corrosion.
- Synchronized A/C drives to synchronize, Conveyor, Star wheel and Platform turret & capping bowl.
- Adjustable bottle height gauge for easy and quick setting.

Utility Requirement

Electrical supply	1 Phase + Neutral + Earthing
Electrical load	1.5 KW

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Model No.	Description	Qty.	Price (Rs.)
FSP-BF-374	**Automatic Four Head Screw Capping Machine Change part cost extra**	**1**	**4,00,000/-**



Description

Automatic Screw cap sealing machine is versatile, self-supported on stainless steel leg with height adjustable adjustment system. The machine is precision built on sturdy welded steel frame completely enclose in stainless steel sheet and doors are provided to facilitate the servicing of machine

Operation

The feed container moving on conveyor belt are fed into star wheel, bringing the

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

container below the sealing head in the subsequent indexing part, mean while the bottle pick up a cap from the delivery chute of cap feeding bowl, where the body and the neck of the container are positioned below the rotating head, where the sealing head is performing perfect operation of Capping.

Technical Specifications		
Output/Min*		60 BPM
Direction of Movement		Left to Right
No. of Sealing Head		4 Nos.
Power Consumption	Main Motor	1.5 HP / 415 Volts / 50 Hz.
	Cap Feeding Bowl	300 Watt, Magnetic coil
Caps Feeding		Vibratory Bowl Feeder
Capping Unit		Magnetic Screw Capping Head with Torque Adjustment
Up-Down Movement		Cam System
Conveyor		SS Slat chain SS304
Height of Conveyor		860 mm to 910 mm
Machine Dimensions**		2135 mm (L) x 1200 mm (W) x 2250 (H) Approx.
Net Weight		650 Kgs. Approx.
Change parts required		**(A) Container: Star Wheel, Back Guide, Feed Worm** **(B) Cap Die, Delivery Chute, Bowl**
Input Specification		
Screw Cap Specification	Diameter**	19 mm to 38 mm***
	Height**	15 to 18.3 mm

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Container Size**	Round Shape	Ø 28 mm to Ø 100 mm Respectively height 58 mm to 240 mm (Height option for other bottle height available)
	Flat / Square	15mm to 100 mm (Length) Respectively 10mm to 50 mm (Width) Respectively height 58 mm x 240 mm (Height option for other bottle height available)

* **Depends on bottle size, cap size and type of cap.**

** **We can supply as per customer requirements.**

*** **With help of change parts.**

Salient Features

- No container No cap arrangement.
- SS elegantly matt finished body.
- Single motor synchronizes conveyor, star wheel.
- Adjustable height of conveyor belt, to align with other machine of the line.
- Sealing pressure can be varied to suit different gauges and size of caps.
- Low noise level, low power consumptions.
- Self-lubricating UHMW-PE guide profile for low friction wears surface, smooth and noiseless conveying.
- SS cladding or hard chrome plating of all exposed parts to ensure long life and resistance against corrosion.
- Synchronized A/C drives to synchronize, Conveyor, Star wheel and Platform turret & capping bowl.
- Adjustable bottle height gauge for easy and quick setting.

Utility Requirement

Electrical supply	3 Phase + Neutral + Earthing
Electrical load	1.5 KW

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Quotation for Inkjet Printer Model No. W 630

As per our discussion regarding above subject. Here with we have submitted offer for the same.

Only sales for Indian Market. **All Prices In Rs.**

Basic Machine		**Machine Quantity: 1 Nos.**	
Item Number	**Description**	**Price**	**Total**
383139	Willett630 (India-English), 3m STRAIGHT UMBILICAL, IP43, 60 micron,3 line	2,30,000	2,30,000/-

Standard Accessories				
Item Number	**Description**	**Qty**	**Price**	**Total**
WIE-0400-002	PHOTO ELECTRIC SENSOR	1 Units	-	-
VJIB0390	W630 Machine Stand & Print Head Stand	1 EA	-	-
WIE-0400-006	3 Way din plug	1 Units	-	-
WIE-0400-042	3 pin top plug	1 Units	-	-
VJ-0400-262	Sensor Bracket for Calypso	1 Units	-	-

Supplies				
Item Number	**Description**	**Qty**	**Price**	**Total**
				-
	Ink, Black, 750mL	2 EA	-	
	Make-up, 750mL	2 EA	-	-
	Cleaning Solution, 1 liter	2 EA	-	
				-

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

Terms& Conditions

Sr. No.	Particulars	Terms & Conditions
1	PRICE	The prices mentioned in this offer are in INR and on Ex-Works (Ahmedabad, Gujarat) basis.
2	TAXES & DUTIES	Applicable Tax Extra.18% GST No Tax for Export Orders as on the date of this offer. Any Taxes if applicable at the time of dispatch shall be levied as applicable on Export Orders.
3	TERMS OF PAYMENT	50% Advance along with purchase order and 50% against Performa Invoice at the time of dispatch.
4	DELIVERY PERIOD	Within 4 to 5 weeks from the date of receipt of technically & commercially clear purchase order, along with the advance payment or receipt of approval for input dimensions, whichever is later.
5	PACKAGING & FORWARDING	Loose Packing Given. If wooden box required then cost extra at actual
6	INSURANCE	Transit Insurance against theft, pilferage, breakage, etc. can be arranged at extra cost at the Buyer's explicit instructions. Otherwise, it shall be assumed that the goods are to be sent at the Buyer's risk. Cost of such insurance will be charged at actuals and it is to be borne by the consignee.
7	TRANSPORT	Transportation of the machines from our manufacturing facility must be arranged by the Buyer. We shall arrange for loading of the equipment at our factory. However, unloading at the Buyer's site needs to be arranged by the Buyer. Our responsibility ceases once the goods leave our factory and are handed over to the carrier. We do not undertake any liability for damage / loss caused during transit, irrespective if the goods are insured or not. In case of any accident / damage during transit, the Buyer will have to directly deal with the Insurance Company without holding any payments, irrespective is the insurance was arranged by the Consignee or the Consigner.
8	INSPECTION	The Buyer and / or Buyer's technically competent representative can visit our factory in Ahmedabad and inspect the machines prior to dispatch. The Buyer's representative must be present at our factory during the Packing and Loading of

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

		the machines. In case the Buyer is not deputing any of its representatives for Pre-Dispatch Inspection, we shall not entertain any disputes arising out of short supply, quality, workmanship, functionality, operating parameters, etc. once the machine is dispatched.
9	FACTORY TRAINING	Thorough training shall be provided by us to your operating staff at our Ahmedabad factory before the machines are dispatched, at no additional cost. However, the lodging & boarding expenses and local expenses of the Buyer's operator must be borne by the Buyer. The Buyer's operator must be technically competent to uncrate and assemble the machines at the Buyer's site before the arrival of our commissioning engineers. The operator must ensure that the necessary ground work at the installation site is completed in all respects before the machines arrive. The operator must be competent to run the machines and carry out the routine maintenance, once the machines are handed over post commissioning.
10	INSTALLATION	The machines must be uncrated and placed in working position by the Buyer at the Installation Site. The Buyer must arrange the external power and air compressor at the site. The machines must be available in the Fully assembled condition when our engineers arrive at the installation site.
11	COMMISSIONING	For supervising and commissioning of the machine, we shall depute one of our engineers on a chargeable basis. The Buyer will have to send a prior intimation of readiness of electrical and utility connections along with the required materials.? 2,000/- per man day will be charged to the Buyer. The Buyer will have to reimburse to and fro 1st Class fare from Ahmedabad to the Buyer's Site. The lodging & boarding expenses and other local expenses of the engineer must be borne by the Buyer for the duration of commissioning.
12	SPECIFICATION	In line with our policies of continual improvements, we reserve the right to modify the design and change the specifications and make of any components / parts, if in our opinion such modification leads to an improvement in the performance of the machine. Therefore, specifications, illustrations, dimensions, offers, drawings, or photographs are not binding in detail.
13	WARRANTY	All our goods carry a warranty of 12 months of trouble-free operation from the date of dispatch. The warranty is only against any manufacturing defects. It does not cover any electrical, electronic or bought out components.

FilSilPek Solutions Pvt. Ltd.
R.Kantilal Block, Near Eagle Glass, Tavdipura
Shahibaug, Ahmedabad, Gujarat-380004, India
T: +91 8200145456, M: +91 9909909285
E: filsilpek.acc@gmail.com, W: www.filsilpek.com
CIN: - U29220GJ2013PTC074068

FilSilPek®
Pack Faster

		Components getting normal wear & tear would be replaced at the Buyer's cost.
14	NOTE	The Buyer must provide samples of Bottles, Caps, Labels, etc. along with the purchase order at no additional cost, otherwise the machines will be made as per our standard specifications, wherein we shall take the trials with water, caps, bottles and labels, etc. available with us and that shall be acceptable to the Buyer.
15	ORDER CANCELLATION	Order once placed cannot be cancelled under any circumstances. In case of an order being cancelled, the entire amount of advance shall be forfeited.
16	OFFER VALIDITY	This offer remains valid for a period of 30 days from the date of this offer. Any extension thereafter will be subject to a written confirmation from our side only.
17	JURISDICTION	No legal proceedings shall be taken to enforce claims and no suits arising out of any contracts shall be instituted except in a court of competent jurisdiction located within Ahmedabad, Gujarat.

Thanks & Regards

FILSILPEK Solutions Pvt. Ltd
NIKITA
Mob: + (91) –8320829310
filsilpek.fb@gmail.com