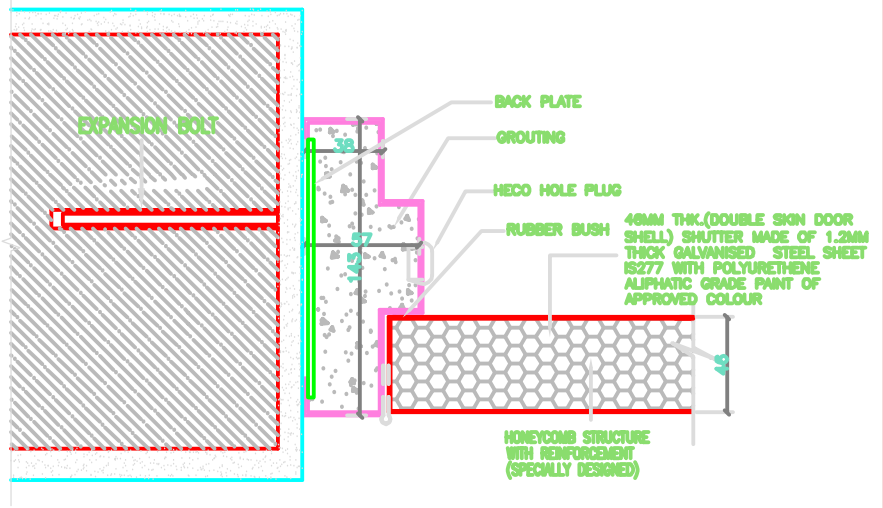
EXPANSION BOLT
BACK PLATE
GROUTING
HECO HOLE PLUG
RUBBER BUSH
46MM THK.(DOUBLE SKIN DOOR SHELL) SHUTTER MADE OF 1.2MM THICK GALVANISED STEEL SHEET IS277 WITH POLYURETHENE ALIPHATIC GRADE PAINT OF APPROVED COLOUR
HONEYCOMB STRUCTURE WITH REINFORCEMENT (SPECIALLY DESIGNED)
38
57
143
46

TYPICAL DETAIL-1
SCALE 1:10

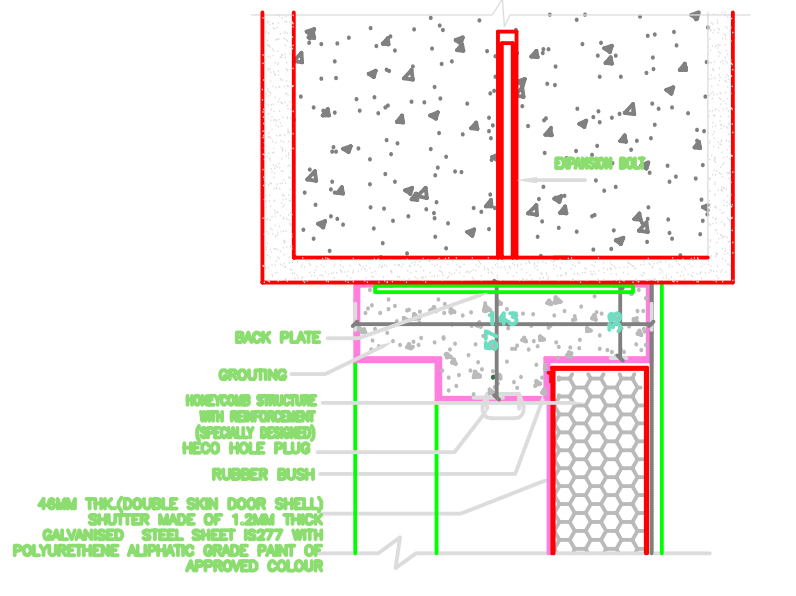
EXPANSION BOLT
BACK PLATE
GROUTING
HONEYCOMB STRUCTURE WITH REINFORCEMENT (SPECIALLY DESIGNED)
HECO HOLE PLUG
RUBBER BUSH
46MM THK.(DOUBLE SKIN DOOR SHELL) SHUTTER MADE OF 1.2MM THICK GALVANISED STEEL SHEET IS277 WITH POLYURETHENE ALIPHATIC GRADE PAINT OF APPROVED COLOUR
143
57
38

TYPICAL DETAIL-2
SCALE 1:10

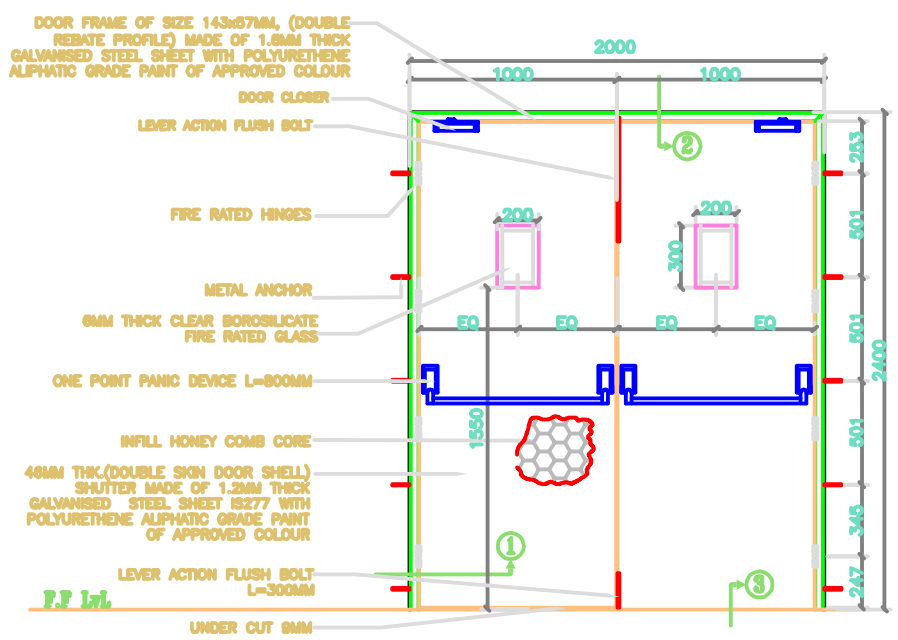
DOOR FRAME OF SIZE 143x57MM, (DOUBLE REBATE PROFILE) MADE OF 1.6MM THICK GALVANISED STEEL SHEET WITH POLYURETHENE ALIPHATIC GRADE PAINT OF APPROVED COLOUR
DOOR CLOSER
LEVER ACTION FLUSH BOLT
FIRE RATED HINGES
METAL ANCHOR
6MM THICK CLEAR BOROSILICATE FIRE RATED GLASS
ONE POINT PANIC DEVICE L=800MM
INFILL HONEY COMB CORE
46MM THK.(DOUBLE SKIN DOOR SHELL) SHUTTER MADE OF 1.2MM THICK GALVANISED STEEL SHEET IS277 WITH POLYURETHENE ALIPHATIC GRADE PAINT OF APPROVED COLOUR
LEVER ACTION FLUSH BOLT L=300MM
F.F LvL
UNDER CUT 9MM
2000
1000
1000
200
200
300
EQ
EQ
EQ
EQ
1550
253
501
501
501
345
247
2400
①
②
③

FD1/2HRS-FIRE RATED HOLLOW STEEL DOOR WITH VISION PANEL(DOUBLE SHUTTER) SIZE - 2000x2400

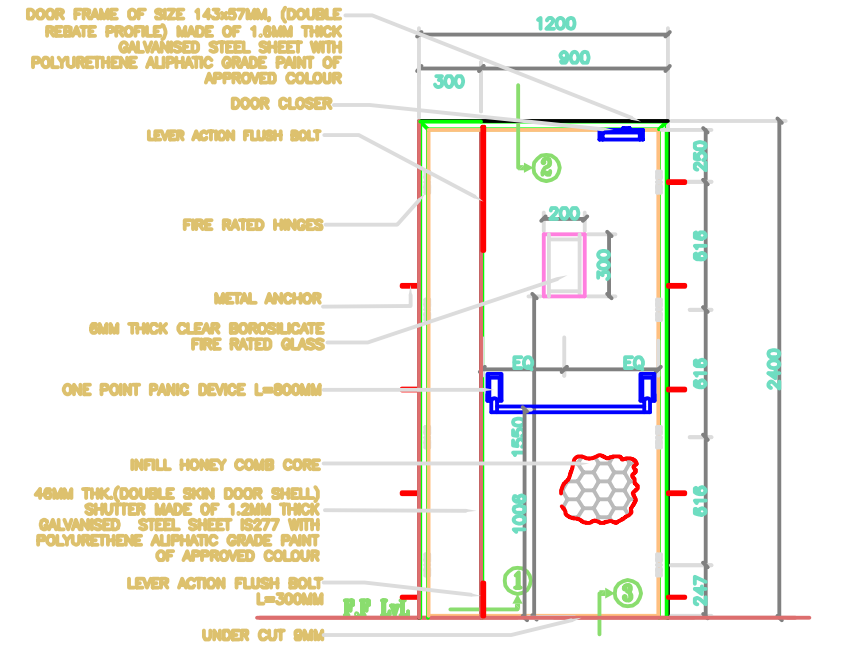
DOOR FRAME OF SIZE 143x57MM, (DOUBLE REBATE PROFILE) MADE OF 1.6MM THICK GALVANISED STEEL SHEET WITH POLYURETHENE ALIPHATIC GRADE PAINT OF APPROVED COLOUR
DOOR CLOSER
LEVER ACTION FLUSH BOLT
FIRE RATED HINGES
METAL ANCHOR
6MM THICK CLEAR BOROSILICATE FIRE RATED GLASS
ONE POINT PANIC DEVICE L=800MM
INFILL HONEY COMB CORE
46MM THK.(DOUBLE SKIN DOOR SHELL) SHUTTER MADE OF 1.2MM THICK GALVANISED STEEL SHEET IS277 WITH POLYURETHENE ALIPHATIC GRADE PAINT OF APPROVED COLOUR
LEVER ACTION FLUSH BOLT L=300MM
F.F LvL
UNDER CUT 9MM
1200
900
300
200
300
EQ
EQ
1550
1006
250
616
616
616
247
2400
①
②
③

FD/2HRS-FIRE RATED HOLLOW STEEL DOOR WITH VISION PANEL SIZE - 1200x2400


INFILL HONEYCOMB CORE
46MM THK.(DOUBLE SKIN DOOR SHELL) SHUTTER MADE OF 1.2MM THICK GALVANISED STEEL SHEET IS277 WITH POLYURETHENE ALIPHATIC GRADE PAINT OF APPROVED COLOUR
9MM
65

TYP. DETAIL-3
SCALE 1:10


38
57
19
39.5
54
49.5
143

DOOR FRAME-143x57x1.6mm
(16 GAUGE STEEL SHEET-DOUBLE REBATE PROFILE)


600
600
ALU. FRAME 65x120mm SIZE
6mm Thk.PLAIN GLASS
Alu. SUB FRAME 113x16mm SIZE

V1- ALUMINIUM LOUVERED VENTILATOR 600 x 600

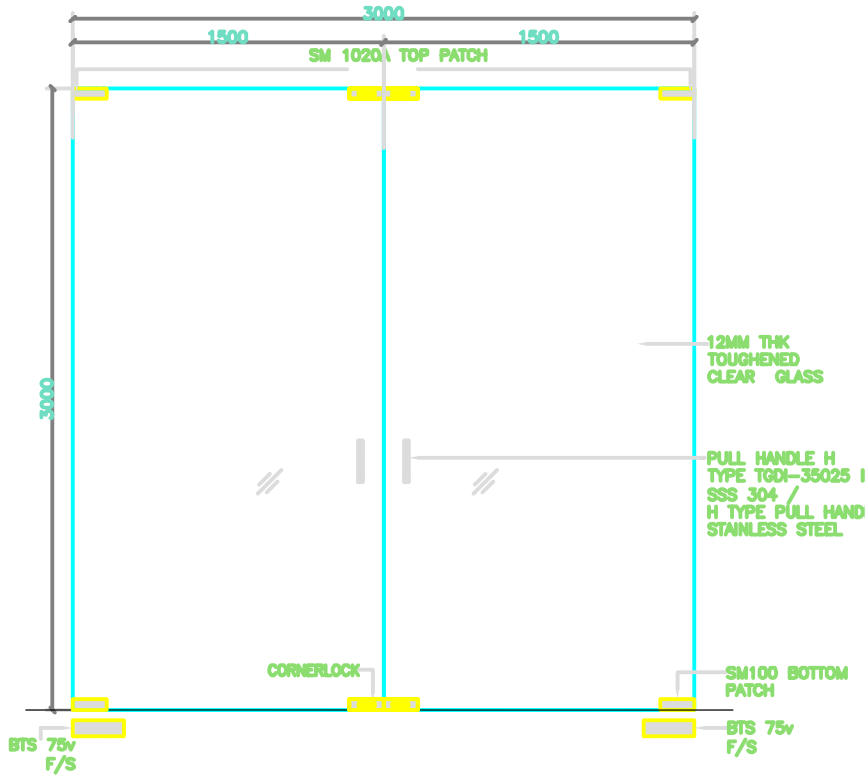
3000
1500
1500
SM 1020A TOP PATCH
3000
12MM THK TOUGHENED CLEAR GLASS
PULL HANDLE H TYPE TGDI-35025 IN SSS 304 / H TYPE PULL HANDLE STAINLESS STEEL
CORNERLOCK
SM100 BOTTOM PATCH
BTS 75v F/S
BTS 75v F/S

D- GLASS DOOR - 3000x3000

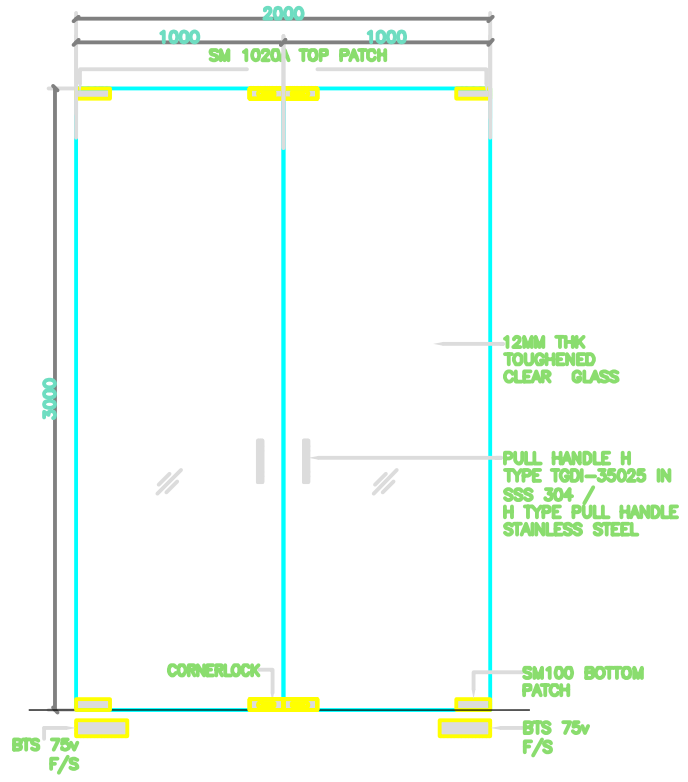
2000
1000
1000
SM 1020A TOP PATCH
3000
12MM THK TOUGHENED CLEAR GLASS
PULL HANDLE H TYPE TGDI-35025 IN SSS 304 / H TYPE PULL HANDLE STAINLESS STEEL
CORNERLOCK
SM100 BOTTOM PATCH
BTS 75v F/S
BTS 75v F/S

D2- GLASS DOOR - 2000x3000

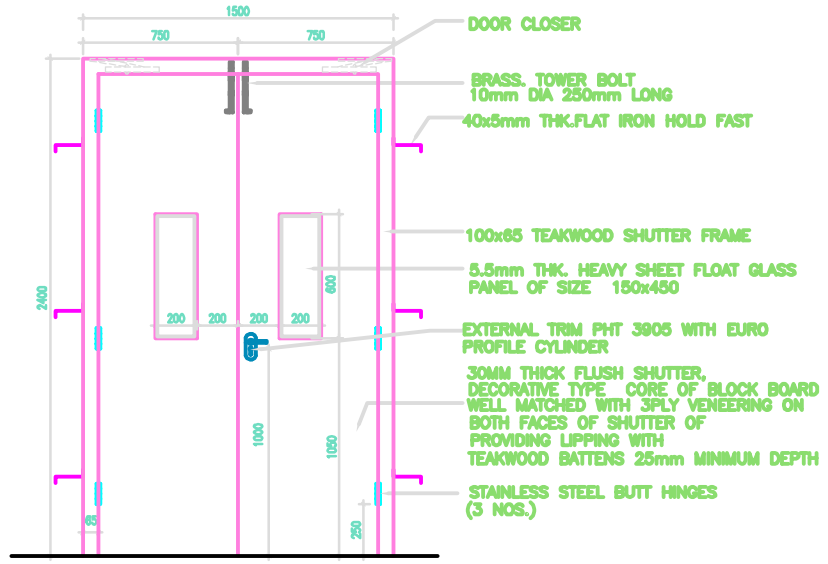
1500
750
750
2400
600
200
200
200
200
1000
1050
65
250
DOOR CLOSER
BRASS. TOWER BOLT 10mm DIA 250mm LONG
40x5mm THK.FLAT IRON HOLD FAST
100x65 TEAKWOOD SHUTTER FRAME
5.5mm THK. HEAVY SHEET FLOAT GLASS PANEL OF SIZE 150x450
EXTERNAL TRIM PHT 3905 WITH EURO PROFILE CYLINDER
30MM THICK FLUSH SHUTTER, DECORATIVE TYPE CORE OF BLOCK BOARD WELL MATCHED WITH 3PLY VENEERING ON BOTH FACES OF SHUTTER OF PROVIDING LIPPING WITH TEAKWOOD BATTENS 25mm MINIMUM DEPTH
STAINLESS STEEL BUTT HINGES (3 NOS.)

D1- FLUSH DOOR WITH VISION PANEL (DOUBLE SHUTTER) - 1500x2400

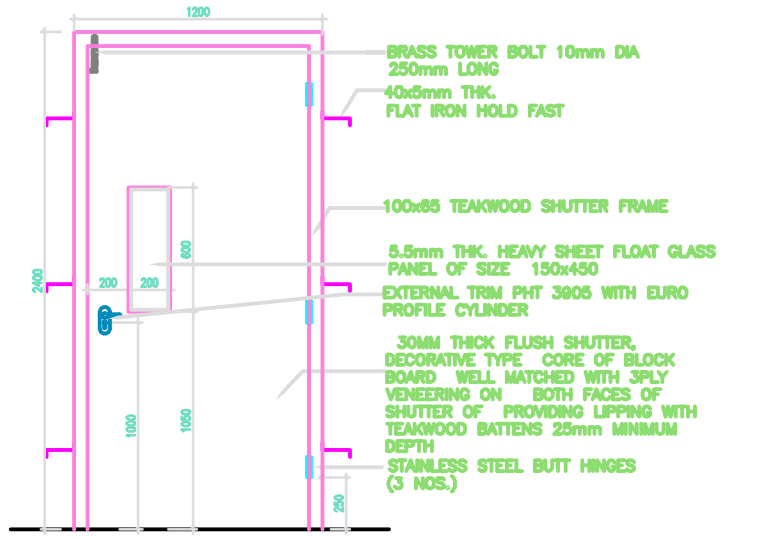
1200
2400
600
200
200
1000
1050
250
BRASS TOWER BOLT 10mm DIA 250mm LONG
40x5mm THK. FLAT IRON HOLD FAST
100x65 TEAKWOOD SHUTTER FRAME
5.5mm THK. HEAVY SHEET FLOAT GLASS PANEL OF SIZE 150x450
EXTERNAL TRIM PHT 3905 WITH EURO PROFILE CYLINDER
30MM THICK FLUSH SHUTTER, DECORATIVE TYPE CORE OF BLOCK BOARD WELL MATCHED WITH 3PLY VENEERING ON BOTH FACES OF SHUTTER OF PROVIDING LIPPING WITH TEAKWOOD BATTENS 25mm MINIMUM DEPTH
STAINLESS STEEL BUTT HINGES (3 NOS.)

D5- FLUSH DOOR WITH VISION PANEL (SINGLE SHUTTER) - 1200x2400


900
2100
1000
250
BRASS TOWER BOLT 10mm DIA 250mm LONG
40x5mm THK. FLAT IRON HOLD FAST
100x65 TEAKWOOD SHUTTER FRAME
5.5mm THK. HEAVY SHEET FLOAT GLASS PANEL OF SIZE 150x450
EXTERNAL TRIM PHT 3905 WITH EURO PROFILE CYLINDER
30MM THICK FLUSH SHUTTER, DECORATIVE TYPE CORE OF BLOCK BOARD WELL MATCHED WITH 3PLY VENEERING ON BOTH FACES OF SHUTTER OF PROVIDING LIPPING WITH TEAKWOOD BATTENS 25mm MINIMUM DEPTH
STAINLESS STEEL BUTT HINGES (3 NOS.)

D6- FLUSH DOOR (SINGLE SHUTTER) - 900x2100


750
2100
1000
250
BRASS TOWER BOLT 10mm DIA 250mm LONG
40x5mm THK. FLAT IRON HOLD FAST
100x65 TEAKWOOD SHUTTER FRAME
5.5mm THK. HEAVY SHEET FLOAT GLASS PANEL OF SIZE 150x450
EXTERNAL TRIM PHT 3905 WITH EURO PROFILE CYLINDER
30MM THICK FLUSH SHUTTER, DECORATIVE TYPE CORE OF BLOCK BOARD WELL MATCHED WITH 3PLY VENEERING ON BOTH FACES OF SHUTTER OF PROVIDING LIPPING WITH TEAKWOOD BATTENS 25mm MINIMUM DEPTH
STAINLESS STEEL BUTT HINGES (3 NOS.)

D7- FLUSH DOOR (SINGLE SHUTTER) - 750x2100

KEY PLAN :-

LEGEND :-

W E S

GENERAL NOTES :

- ALL DIMENSIONS ARE IN MILLIMETERS AND ARE UNFINISHED DIMENSIONS UNLESS OTHERWISE SPECIFIED.
- ALL LEVELS ARE IN METERS AND ARE UNFINISHED LEVELS UNLESS OTHERWISE SPECIFIED.
- DO NOT SCALE DRAWINGS. ONLY WRITTEN DIMENSIONS SHALL BE FOLLOWED, ANY DISCREPANCIES NOTED SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT PRIOR TO EXECUTION.
- FOR DETAILS SUCH AS DOORS, WINDOWS, GRILLS, GATES, SKYLIGHT, TOILETS, STAIRCASES, HANDRAIL, RAILING, ETC. REFER RESPECTIVE ARCHITECTURAL DRAWINGS.
- THESE DRAWINGS SHALL BE CORRELATED AND READ IN CONJUNCTION WITH RESPECTIVE CONSULTANT'S APPROVED DRAWINGS FOR STRUCTURAL MEMBERS, SERVICES SUCH AS PLUMBING, SANITARY, ELECTRICAL, AIR-CONDITIONING, VENTILATION, RAINWATER DRAINAGE & WATERPROOFING AND LANDSCAPING. ANY DISCREPANCIES NOTED SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT PRIOR TO EXECUTION.
- ALL TOILETS WILL HAVE SUNK FLOORS (UNLESS OTHERWISE SPECIFIED) AS PER RESPECTIVE STRUCTURAL DRAWINGS, AND WATERPROOFING AS PER SPECIFICATION.

SCHEDULE OF JOINERY

TYPE	DESCRIPTION	SIZE
RS	ROLLING SHUTTER	5000 x 5000
FD	FIRE DOOR	1200 x 2400
FD1	FIRE DOOR	2000 x 2400
ST1	STEEL DOOR	2000 x 2400
ST2	STEEL DOOR	1200 x 2400
ST3	STEEL DOOR	1000 x 2400
D	GLASS DOOR	3000 x 3000
D1	FLUSH DOOR	1500 x 2400
D2	GLASS DOOR	2000 x 3000
D5	FLUSH DOOR	1200 x 2400
D6	FLUSH DOOR (TOILET DOOR)	900 x 2100
D7	FLUSH DOOR (TOILET DOOR)	750 x 2100
L	LOUVER	2500 x 2100
V	VENTILATOR	600 x 600

REFERNCES:

1. FOR FLOOR PLAN REFER DRG NO: OEN-G-FAC-AR01-GR-01-172125
2. FOR SECTIONS REFER DRG NO: OEN-G-FAC-AR02-02-S0-172126

REV.	DESCRIPTION	DATE	BY	CHD.
R2	REVISED AS PER LATEST FLOOR PLAN	11-03-14	GB	E.V
R1	ISSUED FOR CONSTRUCTION	06-03-14	GB	E.V

AMENDMENT

GRAPHIC SCALE:

0
0.2M
0.6M
1.6M
0.2M
0
0.4M
1.2M
2M

CLIENT:

M/s. Graziano Transmissioni India Pvt. Ltd..

PROJECT:

PROPOSED ODS INDIA NEW PLANT
IN GUJARAT.

DRAWING TITLE:

MAINFACTORY & OFFICE BUILDING
JOINERY DETAILS (SHEET-2)

SCALE : 1 : 25	DRAWN : G.BANU	REV
DATE : 05-03-14	CHKD : E.VALLI	
DRAWING NO: OEN-G-FAC-AR11-GR-02-177145		R2

ARCHITECTURE ● INTERIOR DESIGN ● ENGINEERING ● PLANNING ● CONSTRUCTION MANAGEMENT

CRN

C R NARAYANA RAO

10, KARPAGAMBAL NAGAR,
MYLAPORE, CHENNAI-600 004

B.Tech, (Hons.), M.S., (Ill.), Ph.D., M.Am.Soc. C.E., F.I.E., F.I.V.,
Chartered Engineer - Registered Architect.

[illegible]
WHICH IT HAS BEEN LOANED, AFTER FULFILLING THE PURPOSE OF ISSUE THE DRAWINGS SHALL BE RETURNED TO CRN.