

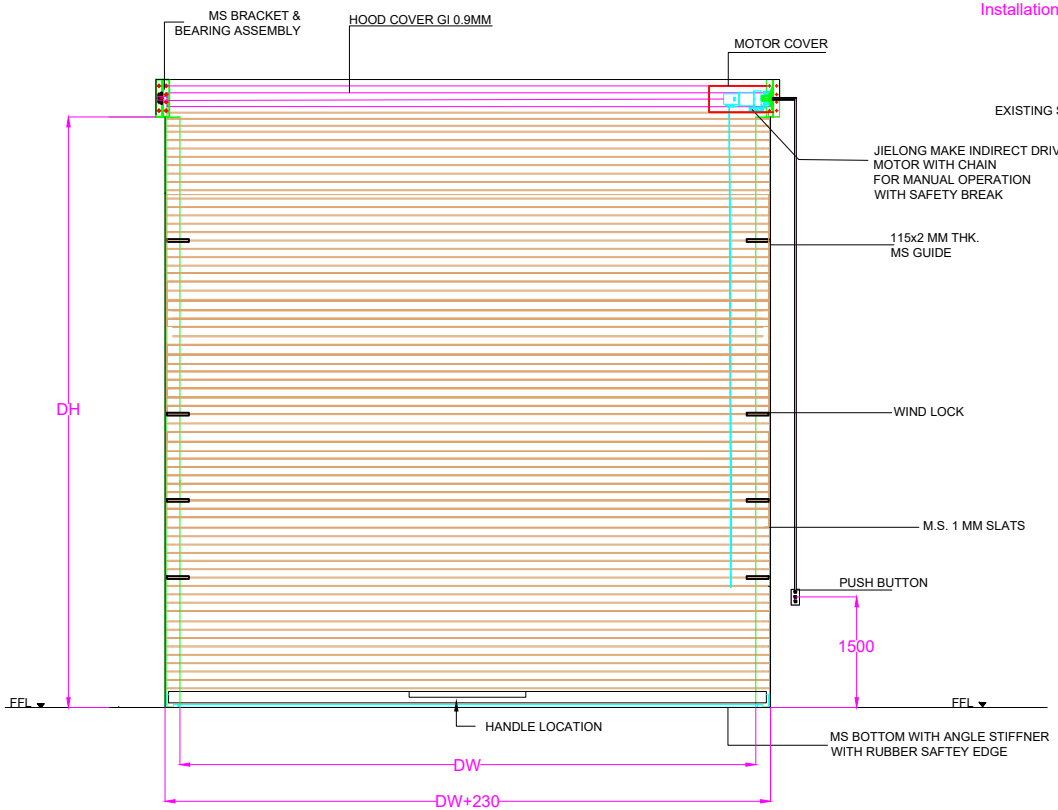


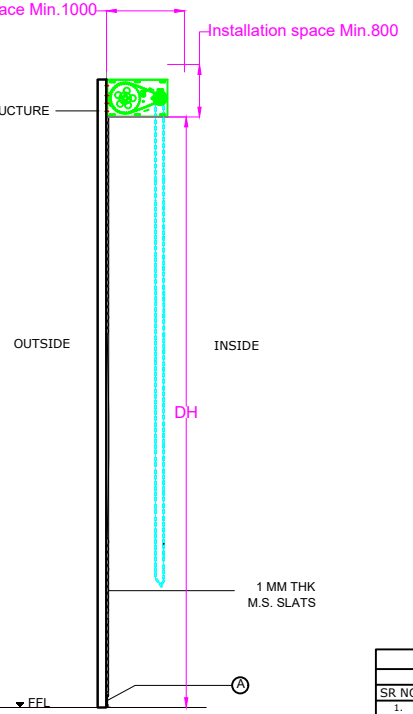


SIDE VIEW

Curve Type MS Shutter SLATS




DETAILS A

TECHNICAL SPECIFICATIONS		
SHUTTER SIZE - DW 5000 x DH 7200 - 1 NO		
SR NO	DESCRIPTION	SPECIFICATION
1.	SOLID SLAT & QTY	1 mm THK M.S. SLAT
2.	M.S.GUIDE TYPE & SIZE	T GUIDE OF 115x95x2 THK
3.	MOTOR & HOOD COVER 0.9 mm GI	1/SHUTTER + 1/SHUTTER
4.	BOTTOM	STURDY ALLUMINIUM BOTTOM PROFILE WITH ANGLE STIFFNER WITH RUBBER SAFTEY EDGE
5.	WIND LOCK	CONSIDERED
6.	SAFETY BREAK	CONSIDERED
7.	CABLE WITH CONDUIT	CONSIDERED
8.	CHAIN	UPTO MAN HEIGHT/SHUTTER
9.	MOTOR LOCATION	RH SIDE
10.	SHUTTER MTG LOCATION	INSIDE
11.	SHUTTER MOUNTING BASE	M.S. STRUCTURE (IN CLIENT SCOPE)
12.	APPROVED RAL SHADE	AS CLIENT APPROVED RAL 1015 (IVORY)

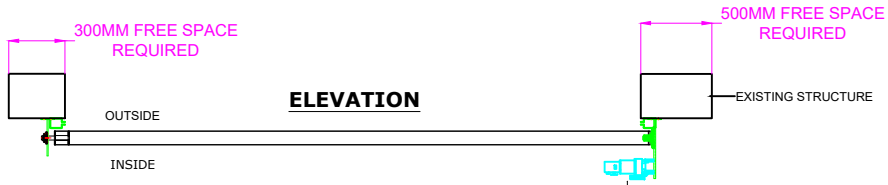

ELEVATION

PLAN

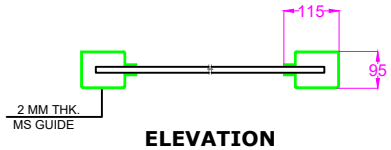

ELEVATION

NOTE:-

1. ALL CIVIL WORK WILL BE IN CLIENT SCOPE.
2. SURFACE FINISH: POWDER COATING OF APPROVED RAL 1015 (IVORY) CODE
3. MOUNTING: MS STRUCTURE & INSIDE
4. THERE WILL BE JOINT IN MS GUIDE NOT IN SINGLE PIECE.
5. IF MS STRUCTURE REQUIRED FOR ROLLING SHUTTER MOUNTING WILL BE IN CLIENT SCOPE.
6. SAFETY CATCH IS CONSIDERED FOR ABOVE ROLLING SHUTTER
7. WIND LOCK QTY MAY VARY AS PER SHUTTER HEIGHT
8. JIELONG MAKE MOTOR - CAPACITY 1300 KG
9. 1300 KG MOTOR SPEED 5.6 RPM

Rev.No	Revision	Date	Revised By
2	QUANTITY CHANGED FROM 4 NOS TO 1 NO	17.07.2023	Nirmala
1	Required Motor capacity and RPM added in note	29.06.2023	Nirmala

TOLERANCE - ±10mm

DW	DH	QTY
5000MM	7200MM	1NO

M.S. MOTORIZED SINGLE SKIN ROLLING SHUTTER (INDIRECT DRIVE)

	NAME	DATE
DRAWN	NIRMALA	21/06/2023
CHECK	A.K.	21/06/2023
APPRD	V.T.	21/06/2023

This drawing & design1ing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern

NIHVA TECHNOLOGIES PVT. LTD.

CLIENT - RBCC

PROJECT - ROLLING SHUTTER

SITE - PUNE

DWG. NO. -NIHVA/23-24/CLT/032 | REV.02

SCALE: 01 | WT: | SHEET: 01 OF 01

If any queries contact : design1@nihva.com