




get() [Best when we use in standlone projects]

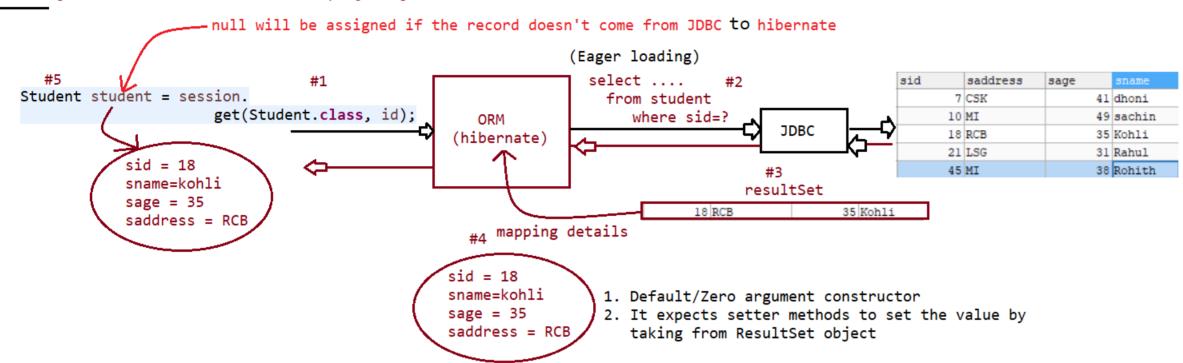

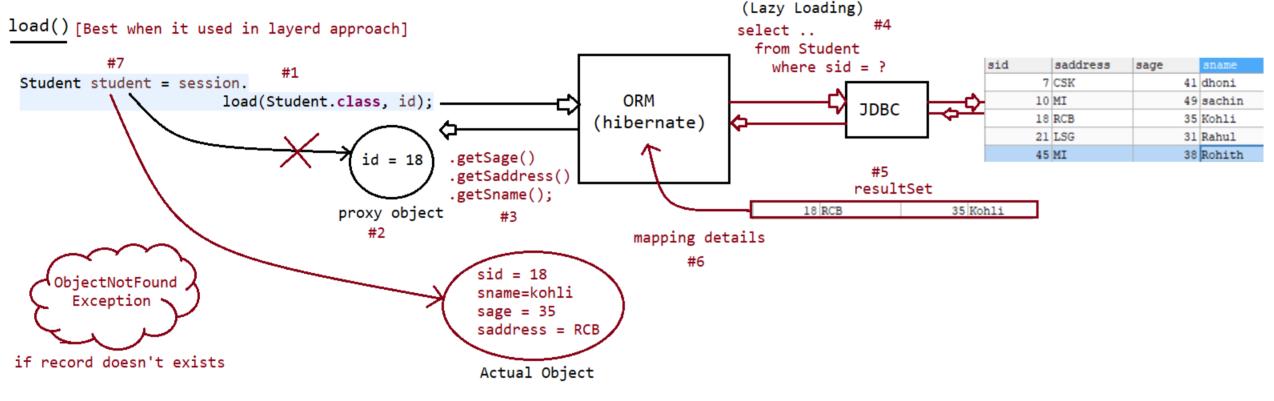

 Default/Zero argument constructor
It expects setter methods to set the value by taking from ResultSet object

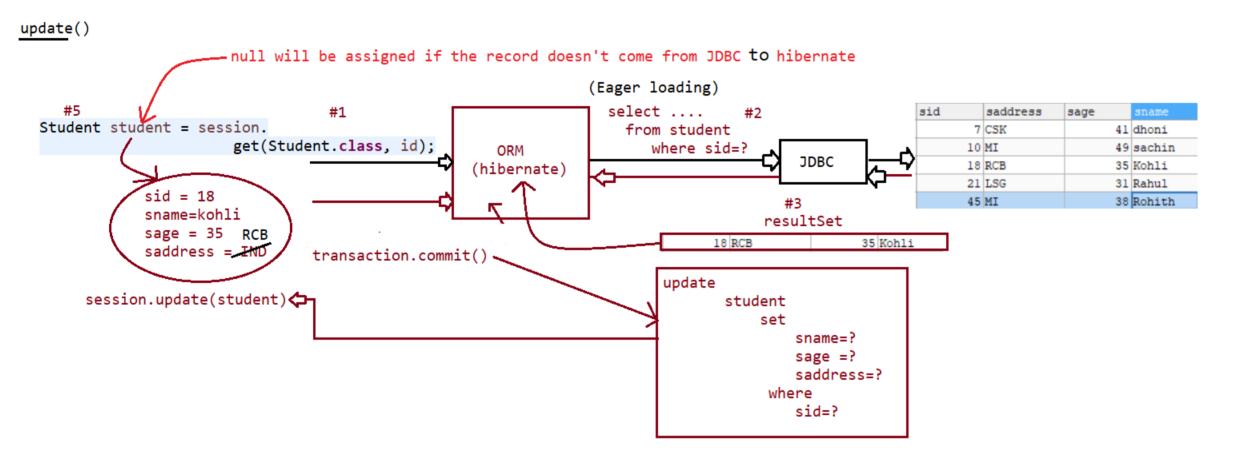

## updating the record with respect to transaction

