

SpringContainer can be configured in 4 ways a. XML driven configuration b. Annotation driven configuration(XML + Annotation)

SpringBoot

- c. Purejava configuration (No XML)
- d. SpringBoot AutoDriven Configuration[RAD-> Rapid Application Development] SpringBoot is an approach/setup to make the configuration autoamtic for the container.

Spring AOP

Spring Mail

;;;;;


;;;;;

SpringBoot

## Distrubuted Application

JSTL

HTML

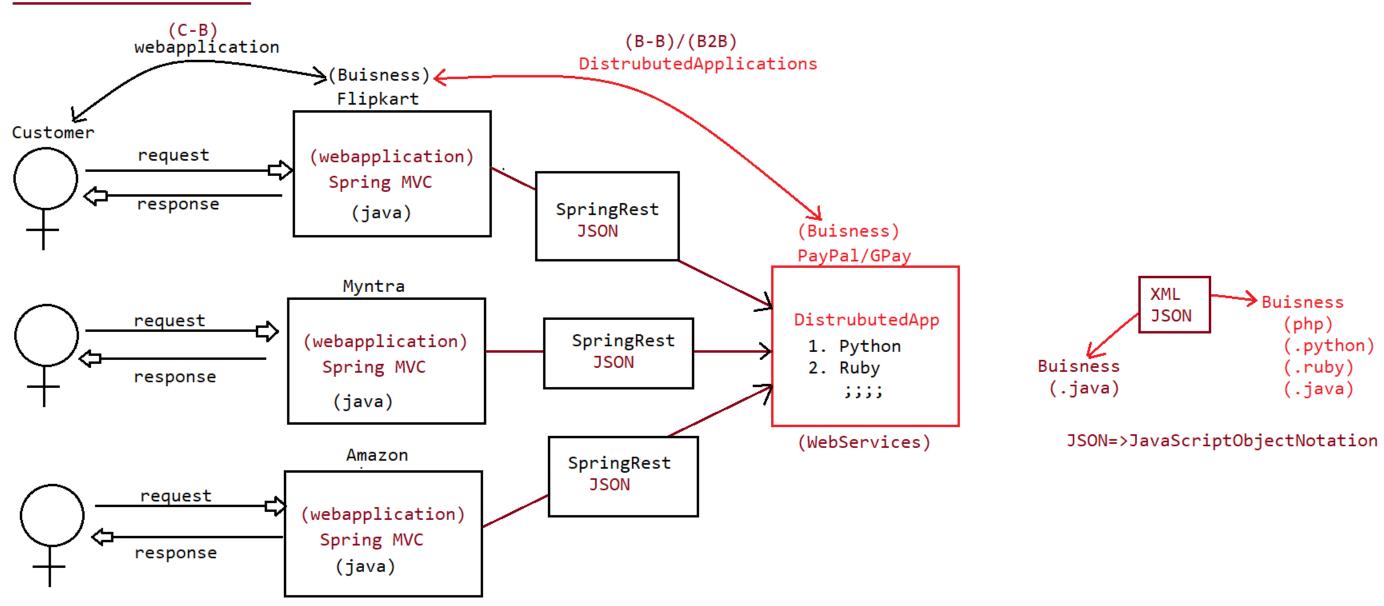

Spring DataJPA

Database

SpringMongoDB

SpringBoot

## LocalClient/RemoteClient

