30/3/26

OOPS (object oriented Programming



⇒

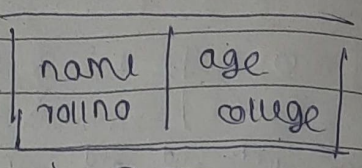

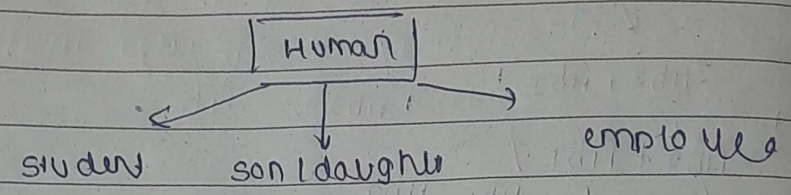

Realworld



Prog

```
class student {
    string name;        //char[]
    int age;
    int rollno;
}
```

↓ Blueprint of object

In Programming, we represent abstract form using a keyword called class (student)

objects → are user-defined datatype

To create object (eg: student)

```
student s1 ;        // declare
```

type, obj

```
s1 = new student() ;
```

Assign address — dynamic memory allocation